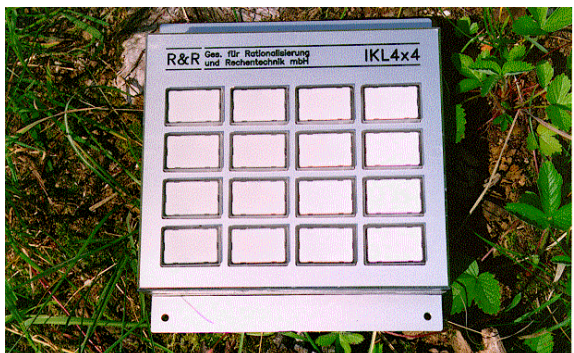


R&R industrial keyboards

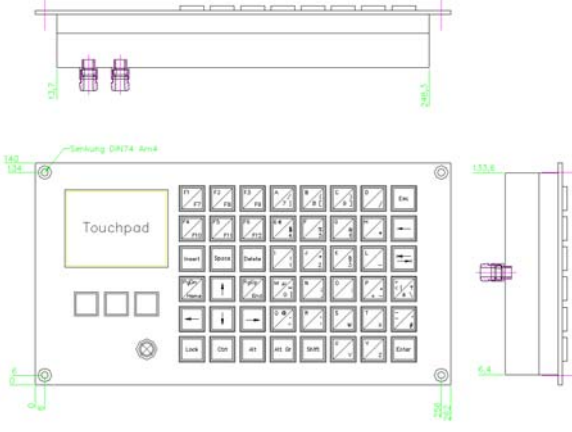
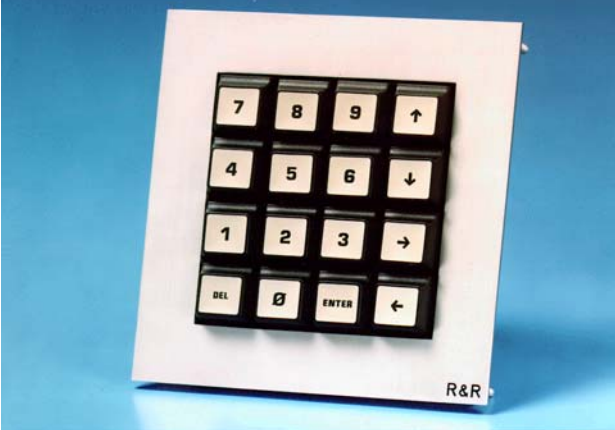


desktop keyboards, 19" drawer keyboards, 19" front panel keyboards, mountable keyboards
lighted keyboards, vandal proofed keyboards with metal keytops, SPS-keyboards
hand held devices, interfaces: AT/PS2, DEC VT420, RS232C, 20mA ...




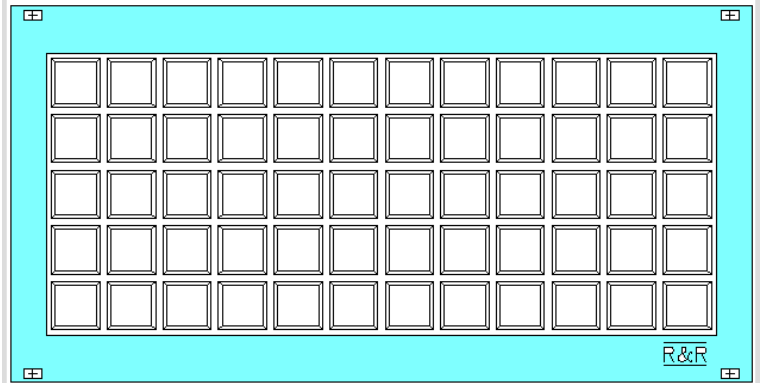
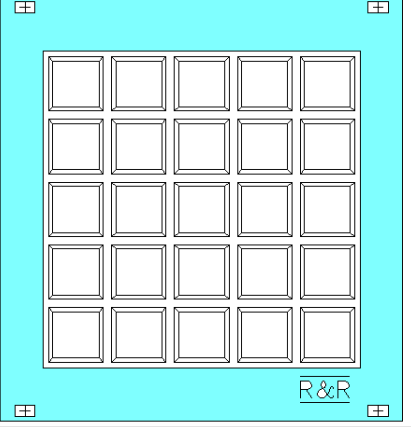
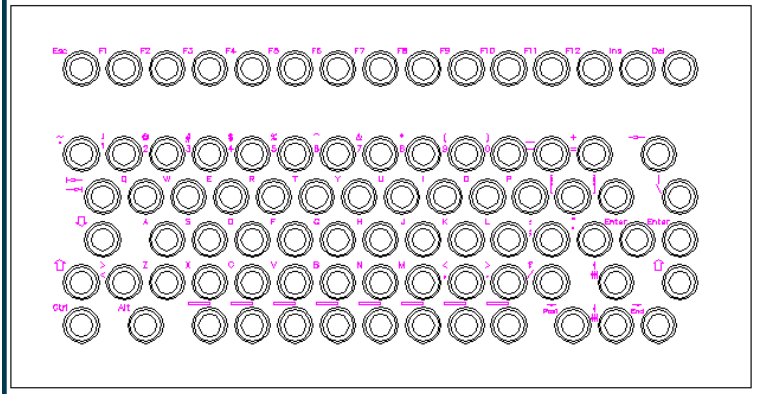
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1565	CHERRY G84-4400 PPADE Slimline Euro-Key Trackball mit modifiziertem Kabellanschluß, 1xPS/2	
647	Cherry Tastatur WIN 95 schmal G80-1800 HADME	
1695	IK-339-6 Trackballtastatur Frontplatte Aluminium, natur eloxiert (B x H x T) 404 x 130 x 35 mm 94 Silikonasten Betätigungskraft 1 N Datenblatt DNR 12417	
1736		

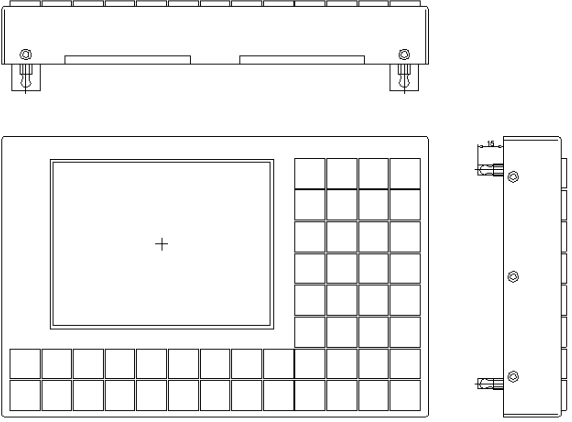
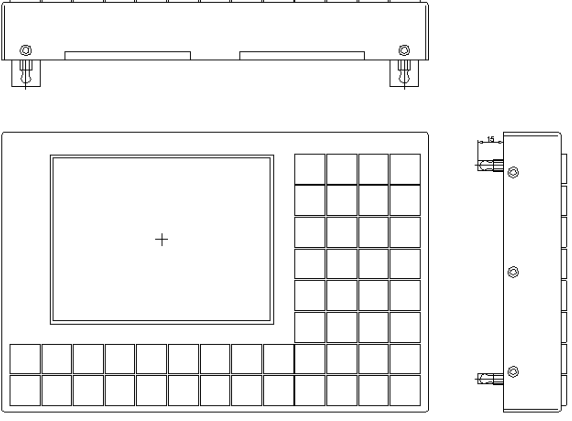
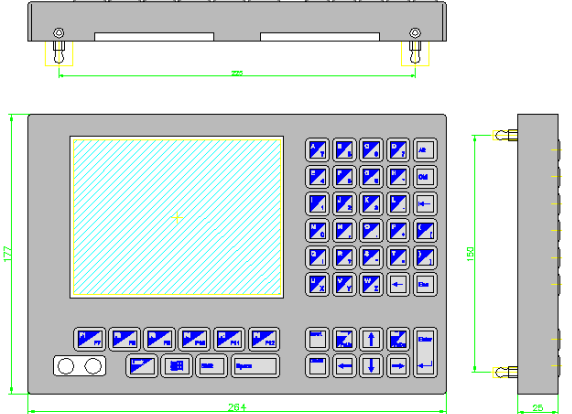
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1237	IK-Null PC/AT Tastaturabschluß RR-P-347	
170	IK100 matrix R&R industrial keyboard 19" part front panel Al electrolytic-oxidated (W x H x D) 254 x 129 x 30 mm 5 x 12 patented R&R keys lift 3 mm, actuation force 1 N connector 2-row, 34-pin plug protection class IP 6 5 front side data sheet DNR 4297	
136	IK101 matrix R&R industrial keyboard 19" part front panel Al electrolytic-oxidated (W x H x D) 122 x 129 x 30 mm 25 patented R&R keys lift 3 mm, actuation force 1 N connector 2-row, 34-pin plug protection class IP 6 5 front side data sheet DNR 4298	
702	IK102-K PS2 R&R Industrietastatur Aluminium natur eloxiert, Beschriftung graviert Rückseite offen (BxHxT) 330 x 170 x 20 mm R&R Kurzhubtaster DNR 5736 Hub 1.5 mm Betätigungskraft 4.5 N Lebensdauer > 2 Millionen Schaltzyklen Schutzart IP 65 (staub- und wasserdicht) PS2-Schnittstelle 3 m Kabel Datenblatt DNR 7900	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
888	IK103 PS2-Tastatur mit Farb-VGA-Display (HxBxT) ca. 168.5 x 257 x 35mm 50 R&R Tasten LT4 Hub 1.5 mm, Betätigungskraft 2N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung mit Einlegeschildchen 4 Tasten mit LED beleuchtet. 6.4" TFT LC-Display mit ISA Grafikkarte 640 x 480 Pixel 262.144 Farben Datenblatt DNR 9150	
890	IK103 PS2-Tastatur ohne Display (HxBxT) ca. 168.5 x 257 x 35mm 50 R&R Tasten LT4 Hub 1.5 mm, Betätigungskraft 2N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung mit Einlegeschildchen 4 Tasten mit LED beleuchtet. vorbereitet für ein 6.4" TFT LC-Display Datenblatt DNR 9150	
1264	IK103-1 Grafikkarte PCI Intern, 80 cm Kabel	
889	IK103-1 PS2-Tastatur mit Farb-VGA-Display + ISA-Karte (HxBxT) ca. 177 x 264 x 25mm Silikonmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. 6.4" TFT LC-Display mit ISA Grafikkarte 640 x 480 Pixel 262.144 Farben Display hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 9151	


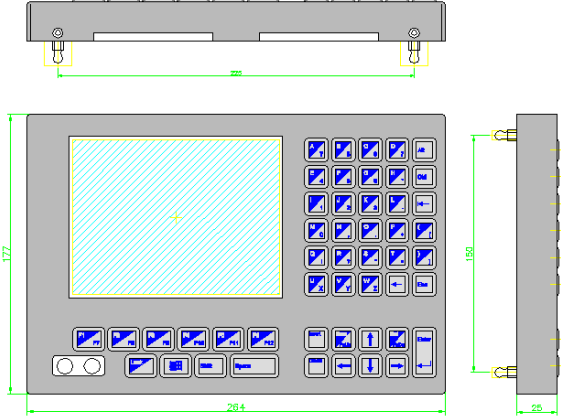


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
915	IK103-1 PS2-Tastatur mit TFT Farb-VGA-Display (HxBxT) ca. 177 x 264 x 25mm Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Keyboardweiche 6.4" TFT LC-Display 640 x 480 Pixel 262.144 Farben hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 9151	
891	IK103-1 PS2-Tastatur ohne Display (HxBxT) ca. 177 x 264 x 25mm Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Tasten mit weicher Epoxy Beschichtung vorbereitet für 6.4" TFT LC-Display mit interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 9151	
956	IK103-1 PS2-Tastatur Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Tasten mit weicher Epoxy Beschichtung mit integrierter Keyboardweiche	
917	IK103-2 PS2-Tastatur DSTN Farb-VGA-Display DSTN (HxBxT) ca. 177 x 264 x 25mm Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 2 Millionen Schaltzyklen Beschriftung bedruckt Tasten mit weicher Epoxy-Beschichtung 4 Tasten mit LED beleuchtet. 6" DSTN LC-Display 640 x 480 Pixel hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 9278	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1039	IK103-3 PS2-Tastatur mit Farb-VGA-Monitor (HxBxT) ca. 177 x 264 x 40mm Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 1 Taste mit LED beleuchtet. Tastaturweiche 6.4" TFT LC-Display 640 x 480 Pixel 262.144 Farben Display hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 9879	
1040	IK103-4 PS2-Tastatur + LCD Touchscreen-Monitor (HxBxT) ca. 177 x 264 x 40mm Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Tastaturweiche 6.4" TFT LC-Display 640 x 480 Pixel 262.144 Farben Display hinter resistiven Touchscreen Schnittstelle RS232C Datenblatt DNR 9880	
1380	IK103-5 PS2 Panellink Farb-VGA-Display (HxBxT) ca. 172 x 265 x 30 Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Keyboardweiche 6.4" TFT LC-Display 640 x 480 Pixel 262.144 Farben hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 10775	
1357	IK103-5 PS2-Tastatur mit TFT Farb-VGA-Display (HxBxT) ca. 172 x 265 x 30 Silikonschaltmatte Hub 1.5 mm, Betätigungskraft 1.2 N Lebensdauer > 3 Millionen Schaltzyklen Beschriftung bedruckt 4 Tasten mit LED beleuchtet. Keyboardweiche 6.4" TFT LC-Display 640 x 480 Pixel 262.144 Farben hinter interferenzoptisch entspiegelter Sicherheitsglasscheibe Datenblatt DNR 10775	

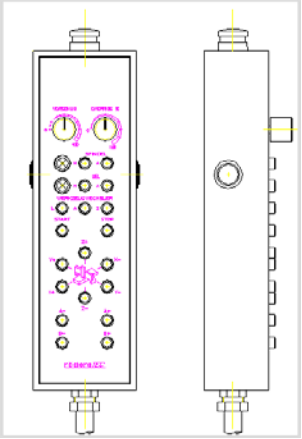
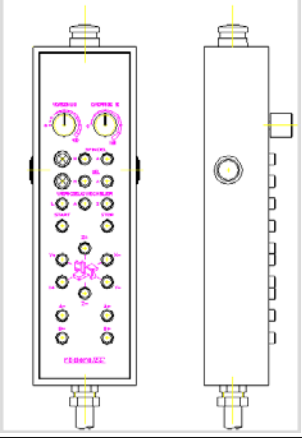


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1609	IK2x1-V5 Tastaturmodul passend zu IJ110 Metallfastenkappe V5 Betätigungskraft 1.5N, Hub 1.2 mm	
418	IK2x5 R&R industrial keyboard rack mount (W x H x D) appr. 95.2 x 114.2 x 28 mm 2 x 5 patented R&R keys key caps type LP double wide (37 x 18 mm) lift 3 mm, actuation force 1 N every pin to the outside connector 15-pin sub-D-plug weight appr. 0.25 kg front side protection class IP 6 5 data sheet DNR 6479	
1427	IK318-I Industrietastatur Gehäuse Aluminium eloxiert, BxHxT ca. 386x126 x 42 mm 64 Tasten LT4, 2 N , 1.5 mm Hub, Kunststofftastenkappen Schnittstelle Infrarot, Stromversorgung 4 Mignon-Zellen AA Datenblatt DNR 11154	
1417	IK339-5 Industrietastatur Gehäuse Aluminum eloxiert, BxHxT 124 x 46 x 185 mm patentierte R&R Tasten Kontakt- und Führungselemente im gedichteten Raum, deutlicher Druckpunkt, Lebensdauer > 3 Millionen Schaltzyklen Betätigungskraft 1 N / Hub 3 mm Beschriftung mit Einlegeschildchen oder graviert. Schnittstelle RS232C, Belegung frei programmierbar Stromversorgung, 12V DC (incl. Steckernetzteil) Datenblatt DNR 11107	





R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
498	IK401 with 5 m cable RS422 R&R remote control case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 288 x 87 x 54 mm 19 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 6945 interface board look for RR-P-190A/191 ISPS-2	
499	IK401 with 10 m cable RS422 R&R hand held remote control case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 288 x 87 x 54 mm 19 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around interface board look for RR-P-190/191A ISPS-2 data sheet DNR 6945	
101	IK402 with 2.5 m cable RS422 R&R remote control incremental hand wheel 100 pulses per round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 87 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 5975	
102	IK402 with 5 m cable RS422 R&R remote control incremental hand wheel, 100 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 87 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 5975	

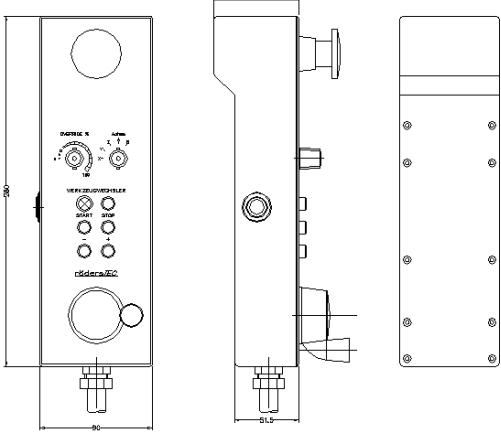


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
437	IK403 with 5 m cable RS422 german R&R remote control incremental hand wheel, 100 pulses/round case aluminium anodized (W x H x D) 265 x 80 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 1 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 6 5 all around data sheet DNR 6639	
541	IK403 with 5 m cable RS422 English R&R remote control incremental hand wheel, 100 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 87 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 1 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 6639	
465	IK403 with 8 m cable RS422 german R&R remote control incremental hand wheel, 100 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 80 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 1 confirmation key 230 V, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 6639	
783	IK403 with 8 m cable RS422 english R&R remote control incremental hand wheel, 100 pulses/round case aluminium anodized (W x H x D) 265 x 80 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 1 confirmation key 230 V, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 6639	




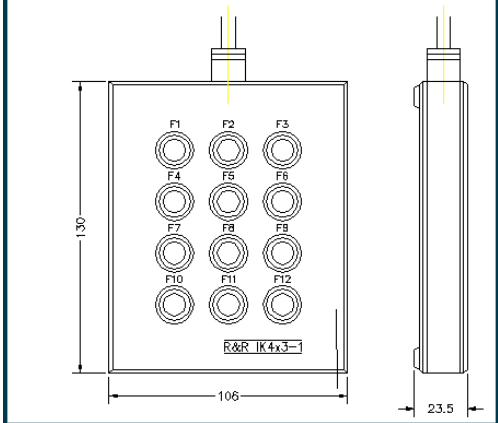
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
542	IK403 accessory cable	
711	IK404 with 5 m cable RS422 R&R remote control incremental hand wheel, 30 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 280 x 90 x 68 mm 5 patented R&R keys lift 3 mm, actuation force 1 N confirmation keys, 2 options switches 1 emergency off-switch protection class IP 6 5 all around data sheet DNR 7956	
120	IK4200 19" R&R drawer keyboard 19" rack mount, 1HU, Al elox (W x H x D) 482 x 44 x400 mm DEC VT 420 compatible 108 patented R&R keys lift 3 mm, actuation force 1 N cable 3 m protection class IP 6 5 all around weight 5.7 kg data sheet DNR 3037	
1300	IK4200 19" USASCII R&R drawer keyboard 19" rack mount, 1HU, Al elox (W x H x D) 482 x 44 x400 mm DEC VT 420 compatible 108 patented R&R keys lift 3 mm, actuation force 1 N cable 3 m protection class IP 6 5 all around weight 5.7 kg data sheet DNR 3037	

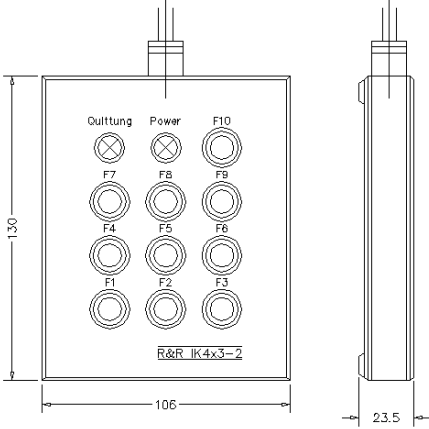

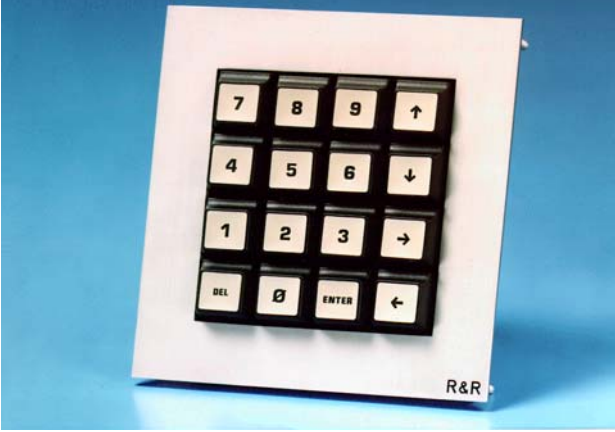
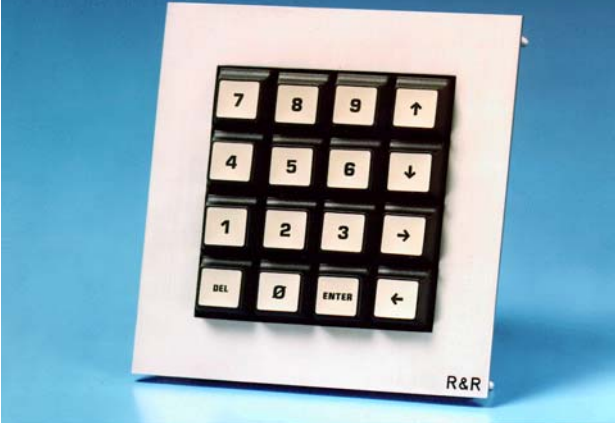
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
64	<p>IK4200 RS423 DEC VT 420</p> <p>R&R industrial keyboard suitcase, Al sand cast lacquered (W x H x D) 505 x 250 x 35 (52) mm weight appr. 5.7 kg 108 patented R&R keys lift 3 mm, actuation force 1 N protection class IP 6 5 all around data sheet DNR 3036</p>	
918	<p>IK4x3 SPS</p> <p>R&R industrial keyboard (W x H x D) 115 x 115 x 29 mm 4x3 patented R&R keys lift 3 mm, actuation force 1 N 1 x comm, 1 pin for each key switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 4085</p>	
149	<p>IK4x3</p> <p>R&R industrial keyboard (W x H x D) 115 x 115 x 29 mm 4x3 patented R&R keys lift 3 mm, actuation force 1 N matrix interface switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 4085</p>	
632	<p>IK4x3-1 AT</p> <p>R&R industrial keyboard desktop case front panel aluminium electrolytic oxidated sealing frame PE black inscription engraved (BxHxT) 106 x 130 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation force 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7567</p>	


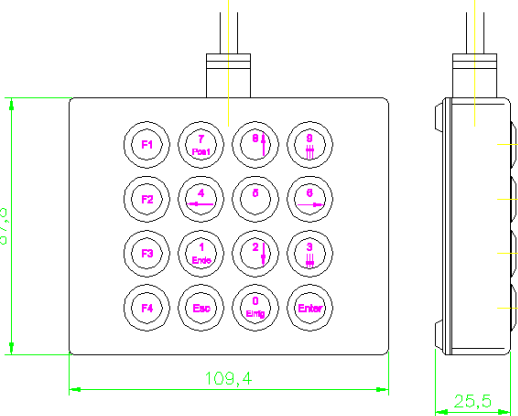
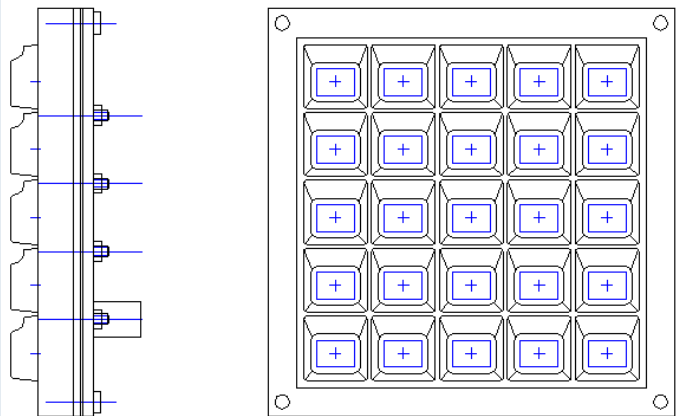
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
640	<p>IK4x3-2 RS422</p> <p>R&R industrial keyboard desktop case front panel aluminium electrolytic oxidated sealing frame PE black inscription engraved (BxHxT) 106 x 130 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation force 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7588</p>	
91	<p>IK4x4 Matrix</p> <p>R&R industrial keyboard (W x H x D) 77.2 x 77.2 x 30 mm 16 patented R&R keys lift 3 mm, actuation force 1 N matrix interface switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 3480</p>	
71	<p>IK4x4 SPS</p> <p>R&R industrial keyboard (W x H x D) 115 x 115 x 29 mm 16 patented R&R keys lift 3 mm, actuation force 1 N every key laid out individually switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 5960</p>	
148	<p>IK4x4-1</p> <p>R&R industrial keyboard (W x H x D) 115 x 115 x 29 mm 16 patented R&R keys lift 3 mm, actuation force 1 N matrix interface 2-row, 8-pin plug switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 4051</p>	

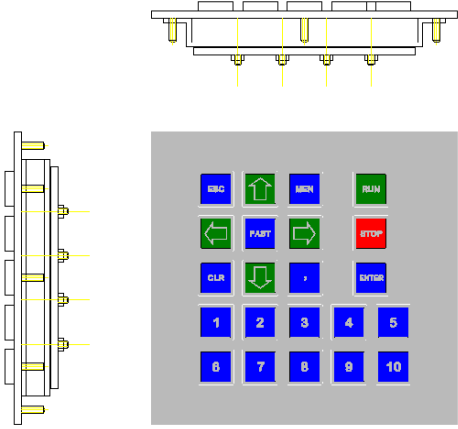
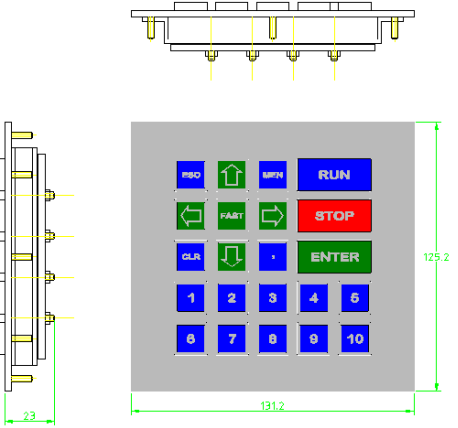
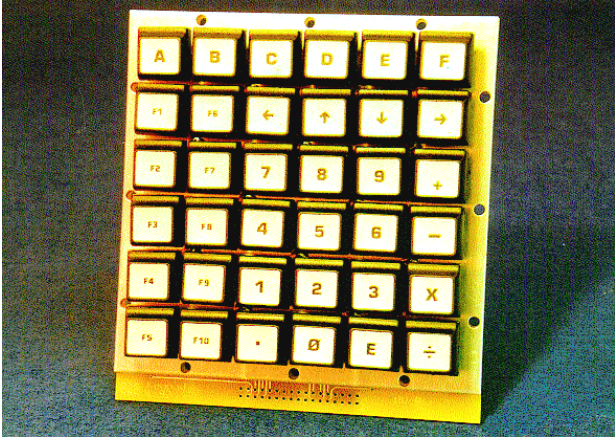
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
522	<p>IK4x4-TTL</p> <p>R&R industrial keyboard (W x H x D) 114.2 x 95.8 x 33 mm 16 patented R&R keys lift 3 mm, actuation force 1 N TTL interface 8-bit microcontroller 2-row, 20-pin plug switching power 30 V/ 10 mA protection class IP 6 5 front side data sheet DNR 7001</p>	
985	<p>IK4x4K AT</p> <p>R&R industrial keyboard desktop case panel aluminium anodized inscription printed (BxHxT) 110 x 88 x 26 mm R&R short lift keys DNR 8888 lift 1.5 mm actuation force 1.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 9494</p>	
427	<p>IK5x5 Matrix</p> <p>R&R industrial keyboard (W x H x D) 114.2 x 114.2 x 30 mm matrix interface 5 x 5 patented R&R keys lift 3 mm, actuation force 1 N 2-row, 10-pin plug protection class IP 6 5 front side data sheet DNR 6553</p>	
1625	<p>IK5x5-1 (4x3 Tasten)</p> <p>jede einzelne Taste herausgeführt DNR 12129</p>	


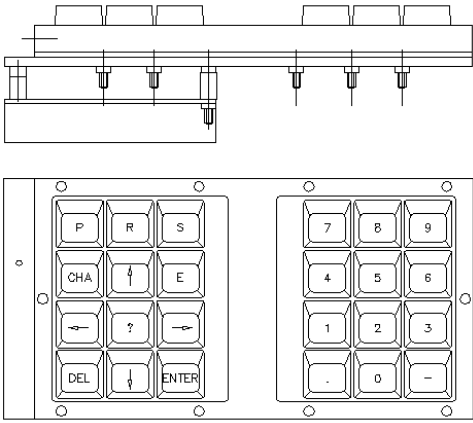
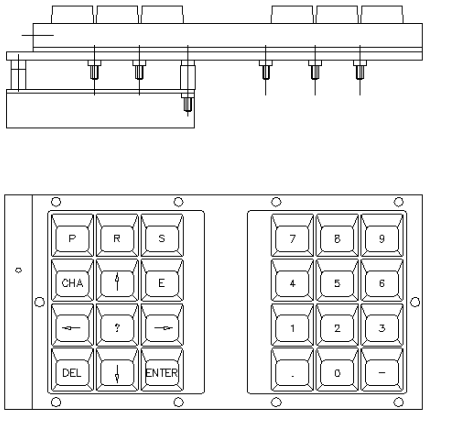
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
899	<p>IK5x5-V5</p> <p>R&R industrial keyboard (W x H x D) 160 x 160 x 25 mm interface 1 common pin, 1 pin for each key 22 R&R metal keys inscription engraved lift 3 mm, actuation force 1 N connector: pads protection class IP 6 5 front side data sheet DNR 9183</p>	
904	<p>IK5x5V5-1</p> <p>R&R industrial keyboard (W x H x D) 131,2 x 125,2 x 25 mm interface 1 common pin, 1 pin for each key 22 R&R metal keys inscription engraved lift 3 mm, actuation force 1 N connector: pads protection class IP 6 5 front side data sheet DNR 9183</p>	
65	<p>IK6x6 Matrix</p> <p>R&R industrial keyboard (W x H x D) 127 x 137 x 30 mm matrix interface 6 x 6 patented R&R keys lift 3 mm, actuation force 1 N 2-row, 34-pin plug protection class IP 6 5 front side data sheet DNR 4082</p>	
968	<p>IK6x6-1 Frontplatte DNR 9349 Al natur eloxiert 117.25 x 117.25 x 2 mm</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
898	<p>IK6x6-V5 Matrix</p> <p>R&R industrial keyboard (W x H x D) 160 x 160 x 25 mm matrix interface 6 x 6 R&R metal keys inscription engraved lift 3 mm, actuation force 1 N 2-row, 34-pin plug protection class IP 6 5 front side data sheet DNR 9182</p>	
678	<p>IK8000 8 bit parallel with strobe</p> <p>R&R Industrial -keyboard mount module Al and PE black (H x W x D) 166 x 91,2 x 45 mm 2 x 12 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7747</p>	
676	<p>IK8000 AT</p> <p>R&R Industrial -keyboard mount module Al and PE black (H x W x D) 166 x 91,2 x 45 mm 2 x 12 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7747</p>	
1577	<p>IK801-E476 english 1 chanel DNR 3404</p>	


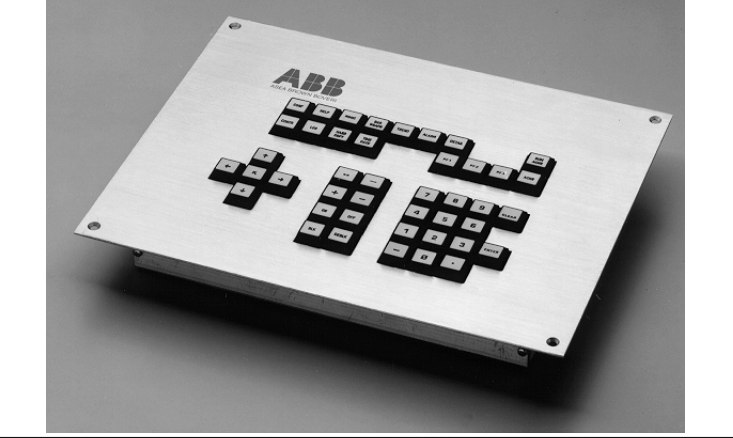
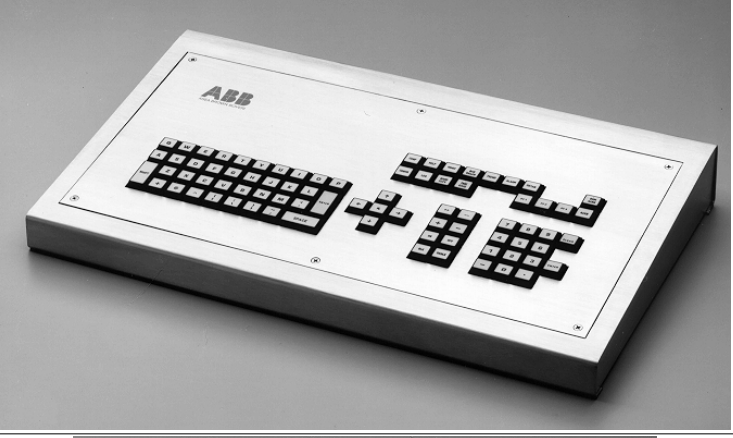
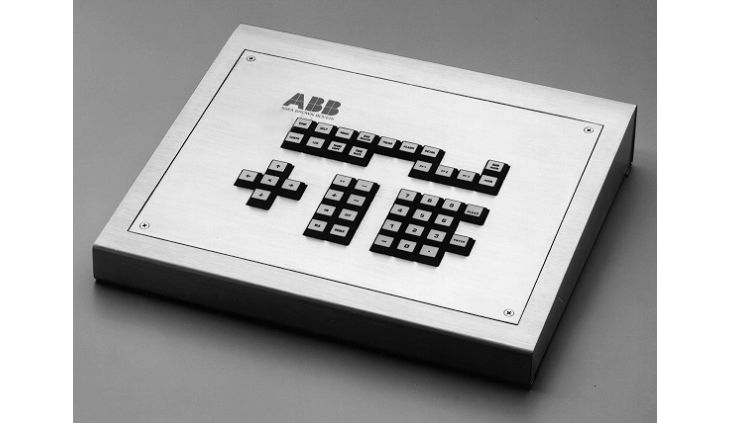
R&R industrial keyboards
März 2005
www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
Kreissparkasse Tuttlingen (BLZ 64350070) 392
USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1578	IK801-E476 english 2 chanel DNR3405	
1575	IK801-E476 german 1 chanel DNR 3404	
1576	IK801-E476 german 2 chanel DNR 3405	
1683	IK801-E476 german PS/2 DNR 3404	

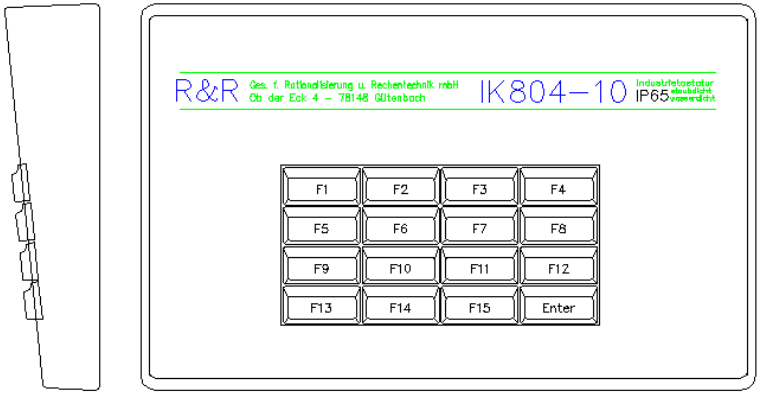

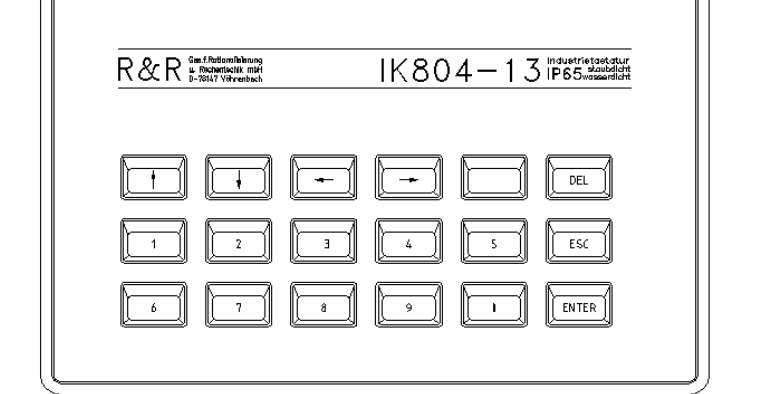
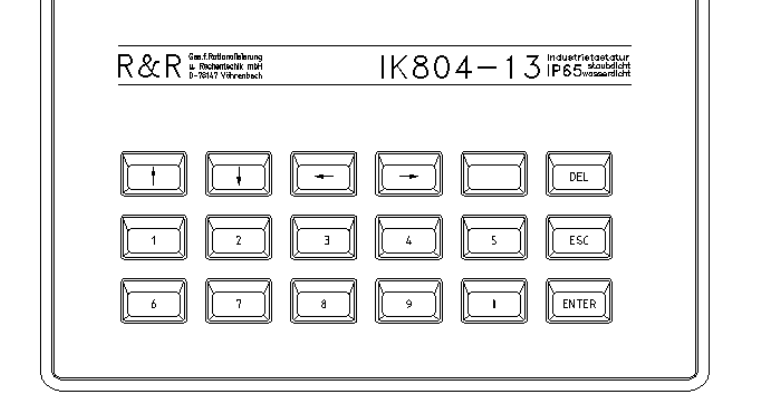
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
48	IK802-1 20 mA / RS232C R&R industrial keyboard V2A mountable case (W x H x D) 500 x 250 x 50 mm max. 128 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 2639	 A photograph of the IK802-1 industrial keyboard. It features a white, rectangular, V2A mountable case with a brushed metal finish. The keyboard is compact and includes a numeric keypad on the right side. The ABB logo is visible on the top left of the case.
49	IK802-2 20 mA / RS232C R&R industrial keyboard V2A mountable case (W x H x D) 330 x 250 x 50 mm max. 88 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 2640	 A photograph of the IK802-2 industrial keyboard. It has a white, rectangular, V2A mountable case with a brushed metal finish. The keyboard is smaller than the IK802-1 and lacks a numeric keypad. The ABB logo is visible on the top left of the case.
50	IK802-3 20 mA / RS232C R&R industrial keyboard V2A suit case (W x H x D) 500 x 315 x 65 mm max. 128 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 data sheet DNR 2641	 A photograph of the IK802-3 industrial keyboard. It features a white, rectangular, V2A suit case with a brushed metal finish. The keyboard is compact and includes a numeric keypad on the right side. The ABB logo is visible on the top left of the case.
51	IK802-4 20 mA / RS232C R&R industrial keyboard V2A suit case (W x H x D) 370 x 315 x 65 mm max. 88 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 2642	 A photograph of the IK802-4 industrial keyboard. It has a white, rectangular, V2A suit case with a brushed metal finish. The keyboard is smaller than the IK802-3 and lacks a numeric keypad. The ABB logo is visible on the top left of the case.

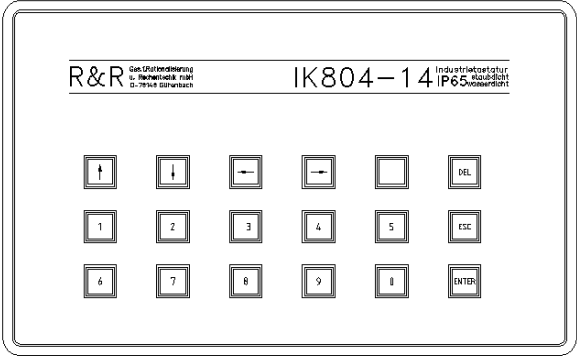
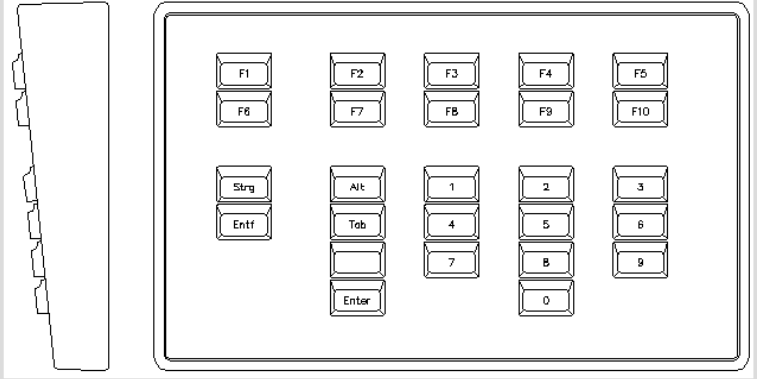
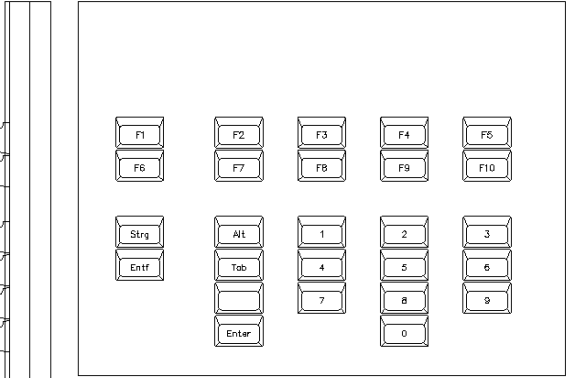

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1026	<p>IK804-10 AT</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 39 (50) mm 16 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around</p> <p>data sheet DNR 9767</p>	 <p>The diagram shows a 4x4 grid of function keys labeled F1 through F15, with an 'Enter' key in the bottom right corner. Above the grid, the R&R logo and model number 'IK804-10' are displayed, along with technical specifications: 'Ges. f. Rationalisierung u. Rechentechnik mbH', 'Ob der Eck 4 - 78148 Gütenbach', and 'Industrietastatur IP65 Wasserdicht'.</p>
76	<p>IK804-12 AT / RS232C</p> <p>R&R industrial keyboard with joystick patented sensing suit case, Al sand cast lacquered front panel aluminium electrolytic-oxidated (W x H x D) 300 x 184 x 30 (50) mm 24 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 5912</p>	 <p>The photograph shows the IK804-12 AT industrial keyboard, which features a custom layout with a joystick and 24 keys. It is shown resting on a grassy surface. The keyboard has the R&R logo and model number 'IK804-12' printed on the top panel, along with technical specifications: 'Ges. f. Rationalisierung u. Rechentechnik mbH', 'Ob der Eck 4 - 78148 Gütenbach', and 'Industrietastatur IP65 Wasserdicht'.</p>
406	<p>IK804-13 AT -40°C to +80°C</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium electrolytic-oxidated (W x H x D) 300 x 184 x 30 (50) mm 18 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 6303</p>	 <p>The diagram shows a 3x6 grid of keys. The top row includes directional arrows (up, down, left, right), a blank key, and a 'DEL' key. The middle row includes numbers 1 through 5, a blank key, and an 'ESC' key. The bottom row includes numbers 6 through 9, a blank key, and an 'ENTER' key. Above the grid, the R&R logo and model number 'IK804-13' are displayed, along with technical specifications: 'Ges. f. Rationalisierung u. Rechentechnik mbH', 'Ob der Eck 4 - 78148 Gütenbach', and 'Industrietastatur IP65 Wasserdicht'.</p>
405	<p>IK804-13 AT</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium electrolytic-oxidated (W x H x D) 300 x 184 x 30 (50) mm 18 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 6303</p>	 <p>The diagram shows a 3x6 grid of keys, identical to the previous row. The top row includes directional arrows (up, down, left, right), a blank key, and a 'DEL' key. The middle row includes numbers 1 through 5, a blank key, and an 'ESC' key. The bottom row includes numbers 6 through 9, a blank key, and an 'ENTER' key. Above the grid, the R&R logo and model number 'IK804-13' are displayed, along with technical specifications: 'Ges. f. Rationalisierung u. Rechentechnik mbH', 'Ob der Eck 4 - 78148 Gütenbach', and 'Industrietastatur IP65 Wasserdicht'.</p>

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
825	<p>IK804-14 AT -40°C to +80°C</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium electrolytic-oxidated (W x H x D) 300 x 184 x 30 (50) mm 18 patented R&R keys vandal proofed metal key-tops V5 lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 8651</p>	
996	<p>IK804-15 AT</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 39 (50) mm 26 patented R&R keys lift 3 mm, actuation force 3 N weight 2.6 kg protection class IP 6 5 all around</p> <p>data sheet DNR 9624</p>	
997	<p>IK804-16 AT</p> <p>R&R industrial keyboard case aluminium anodized (W x H x D) 300 x 184 x 39 (50) mm 26 patented R&R keys lift 3 mm, actuation force 3 N weight 2.6 kg protection class IP 6 5 all around</p> <p>data sheet DNR 9625</p>	
128	<p>IK804-2 RS232C/ 20 mA</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 30 (50) mm 19 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 3445</p>	

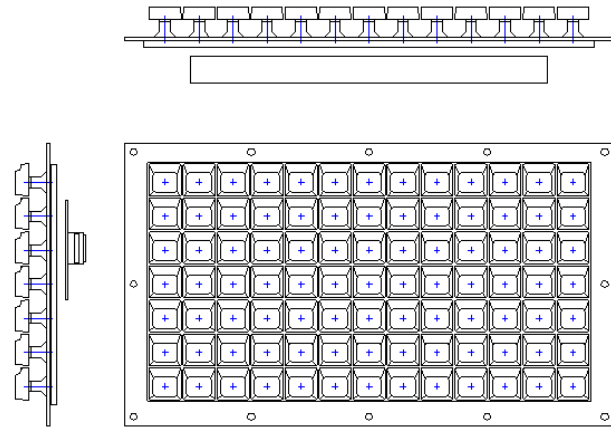
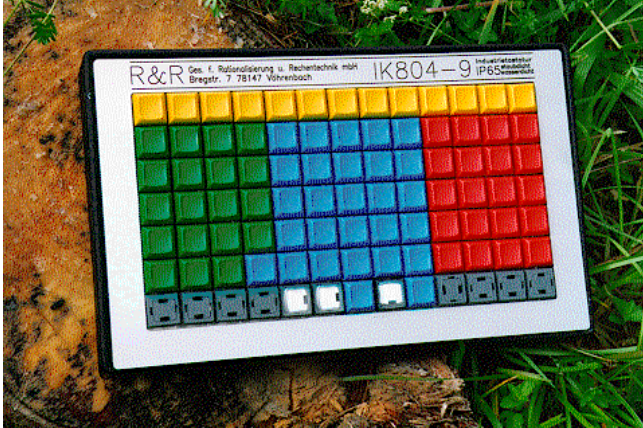
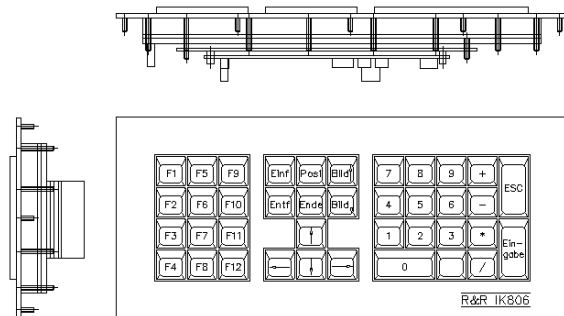
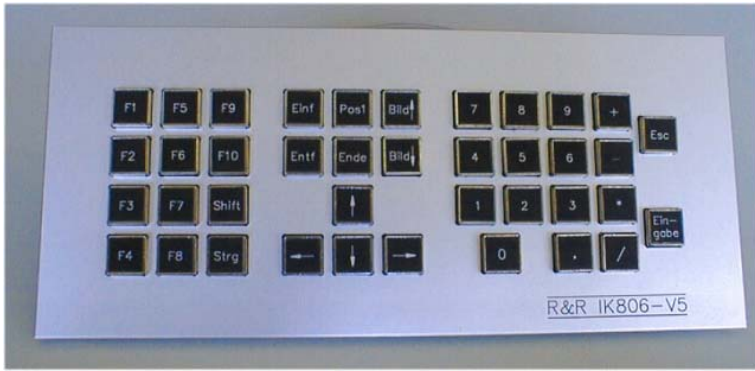
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
73	<p>IK804-6 AT</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 30 (50) mm 48 patented R&R keys max. 91 (7 x 13) keys lift 3 mm, actuation force 1 N brass key caps type V weight 2.6 kg protection class IP 6 5 all around data sheet DNR 4029</p>	
74	<p>IK804-7 RS423 DEC VT420 -30°C to +80°C</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 30 (50) mm 16 (max. 48) patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 4094</p>	
439	<p>IK804-7 RS423 DEC VT420 0°C to +50°C</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 30 (50) mm 16 (max. 48) patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 4094</p>	
75	<p>IK804-8 AT</p> <p>R&R industrial keyboard suit case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 39 (50) mm 39 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 4095</p>	

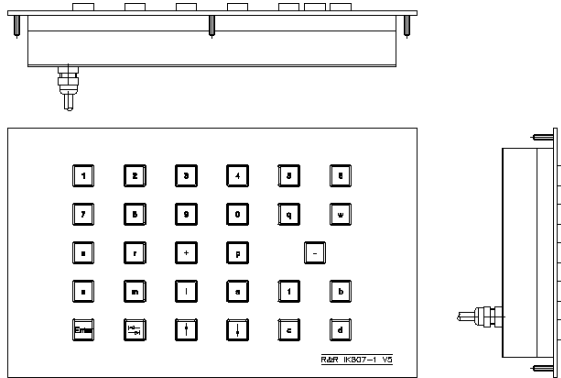

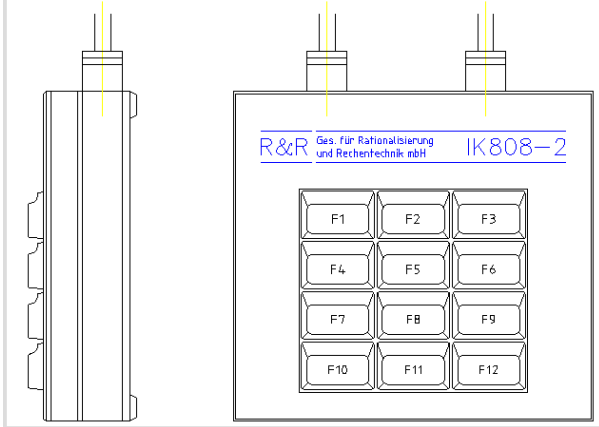
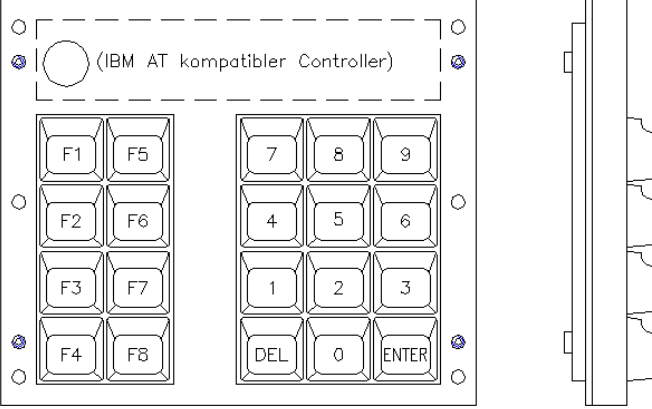
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
431	<p>IK804-9 AT mountable module</p> <p>R&R industrial keyboard hole plate Al anodized (W x H x D) 274 x 158.3 x 43 mm 91 patented R&R keys lift 3 mm, actuation force 1 N protection class IP 6 5 all around data sheet DNR 6578</p>	
430	<p>IK804-9 AT</p> <p>R&R industrial keyboard desktop case, Al sand cast lacquered front panel aluminium anodized (W x H x D) 300 x 184 x 30 (50) mm 91 patented R&R keys lift 3 mm, actuation force 1 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 5907</p>	
881	<p>IK806 AT</p> <p>R&R Industrial-keyboard mountable module front panel Al anodized (WxHxD in mm) 276x122x40 mm 39 patented R&R keys lift 3 mm, actuation force 1 N protection class I P 6 5 weight 1 kg data sheet DNR 9101</p>	
895	<p>IK806-V5 AT</p> <p>R&R Industrial-keyboard mountable module front panel Al anodized (WxHxD in mm) 276x122x40 mm 39 patented vandalism proofed R&R metall keys inscription engraved lift 3 mm, actuation force 1 N protection class I P 6 5 weight 1 kg data sheet DNR 9161</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
894	<p>IK807-1 PS2</p> <p>R&R industrial keyboard front panel aluminium anodized (W x H x D) 303 x 185 x 40) mm 29 patented R&R keys vandal proofed metal key-tops V5 lift 3 mm, actuation force 3 N weight 2.6 kg protection class IP 6 5 all around data sheet DNR 9159</p>	
32	<p>IK808 AT</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 24 patented R&R keys lift 3 mm, actuation force 1 N layout custom design 0°C to +50°C protection class IP 6 5 all around data sheet DNR 4800</p>	
211	<p>IK808-2 AT</p> <p>R&R industrial keyboard desktop front panel aluminium electrolytic-oxidated (W x H x D) 166 x 147 x 25 mm 12 patented R&R keys lift 3 mm, actuation force 1 N 8-bit microcontroller keyboard switch 2 x 3 m cable 0°C to +50°C protection class IP 6 5 all around data sheet DNR 6241</p>	
410	<p>IK808-3 AT</p> <p>R&R industrial keyboard mountable case Al and PE black (W x H x D) 135.2 x 147 x 25 mm 18 patented R&R keys lift 3 mm, actuation force 1 N 0°C to +50°C protection class IP 6 5 front side data sheet DNR 6381</p>	

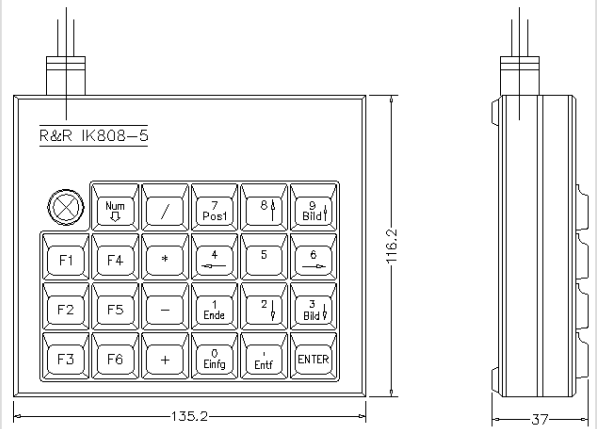
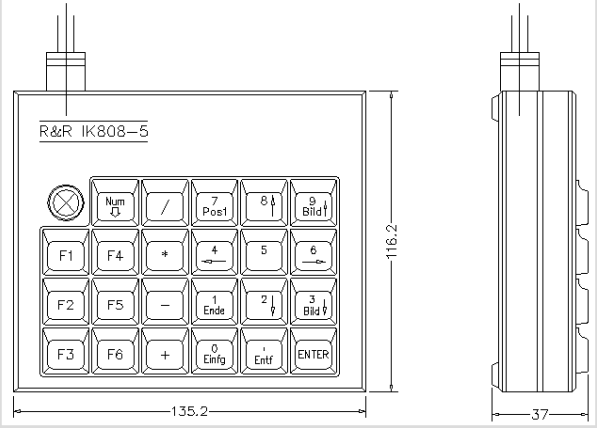


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
558	IK808-4 AT 1.2mm/1.5N R&R Industrial -keyboard mount module AI and PE black (H x W x D)135.2 x 147 x 25 mm 23 patented R&R-keys lift 1.2 mm actuation force 1.5 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7140	
806	IK808-4 AT 3mm/1N panel modul R&R Industrial -keyboard mountable module AI (H x W x D)135.2 x 147 x 25 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7140	
557	IK808-4 AT 3mm/1N R&R Industrial -keyboard Mount module AI and PE black (H x W x D)135.2 x 147 x 25 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7140	
559	IK808-4 AT3mm/3N R&R Industrial -keyboard mount module AI and PE black (H x W x D)135.2 x 147 x 25 mm 23 patented R&R-keys lift 3 mm actuation force 3 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7140	

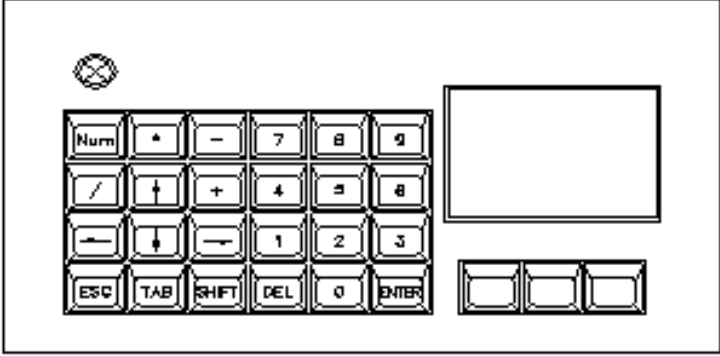
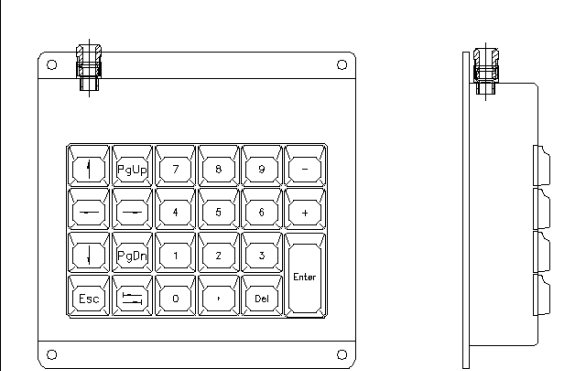
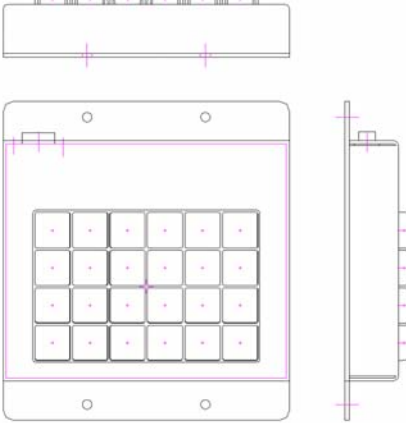
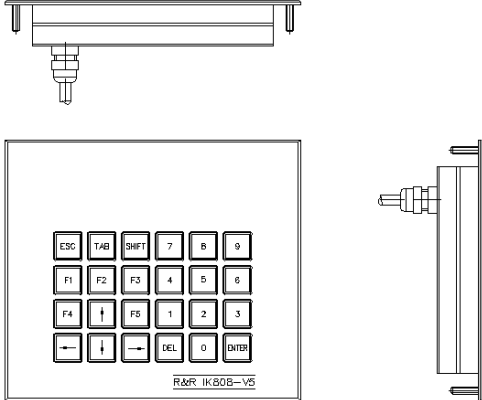
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
664	<p>IK808-5 AT 3mm/1N</p> <p>R&R Industrial desktop-keyboard Al and PE black (H x W x D)135.2 x 147 x 37 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 data sheet DNR 7683</p>	
717	<p>IK808-5 AT 3mm/1N</p> <p>R&R Industrial desktop-keyboard Al and PE black (H x W x D)135.2 x 147 x 37 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 data sheet DNR 7683</p>	
775	<p>IK808-6 PS2 3mm/1N</p> <p>R&R Industrial desktop-keyboard case Al anodized and PE black (H x W x D)135.2 x 147 x 37 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 data sheet DNR 8212</p>	
883	<p>IK808-7 AT 3mm/1N</p> <p>R&R Industrial keyboard Al and PE black (H x W x D) 116.2 x 135.2 x 37 mm 26 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 data sheet DNR 9113</p>	

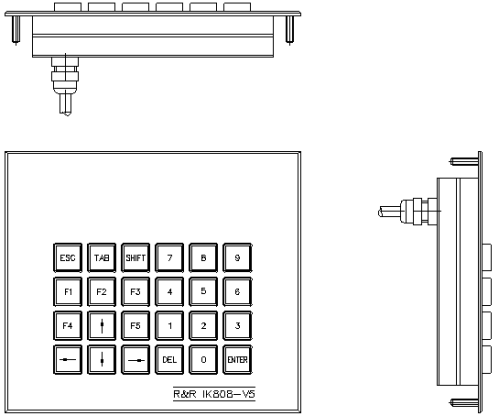

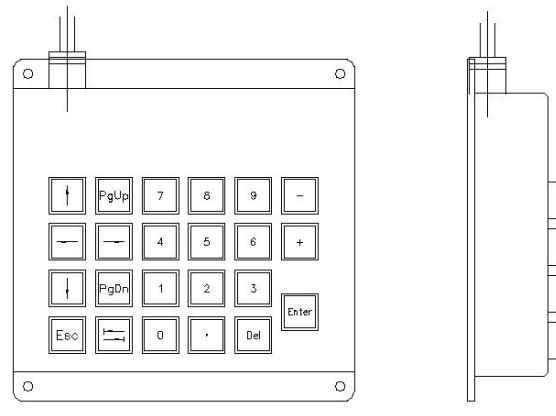

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1291	<p>IK808-8 PS2/PS2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 24 patented R&R keys lift 3 mm, actuation force 1 N layout custom design 0°C to +50°C touchpad with PS/2 Interface protection class IP 6 5 all around data sheet DNR 10572</p>	
1442	<p>IK808-9 PS2 3mm/1N</p> <p>R&R Industrial desktop-keyboard case Aluminium anodized (H x W x D) 140 x 140 x 39 mm 23 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 5 m cable data sheet DNR 11233</p>	
1821	<p>IK808LT4-1 RS232C</p> <p>R&R industrial keyboard housing aluminium anodized (W x H x D) 145 x 160 x 35 mm 24 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 13430</p>	
761	<p>IK808V5 AT</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 24 patented R&R keys lift 3 mm, actuation force 1 N vandal proof metal keycaps V5 layout custom design 0°C to +50°C protection class IP 6 5 all around data sheet DNR 8156</p>	

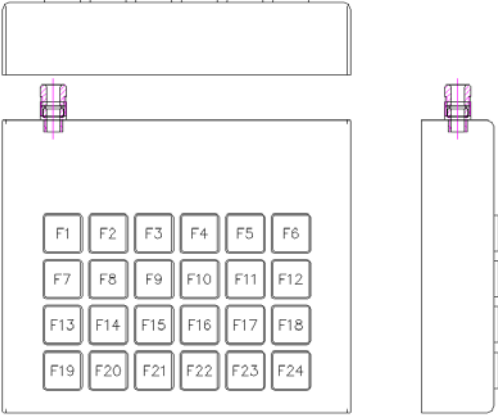

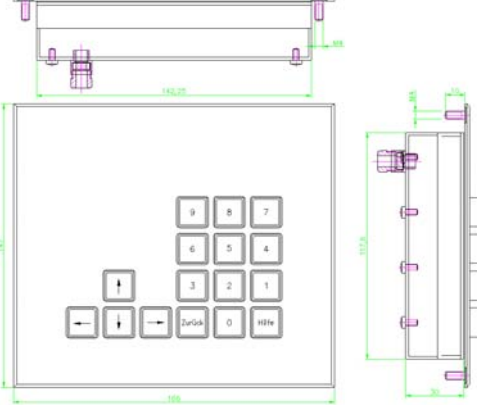
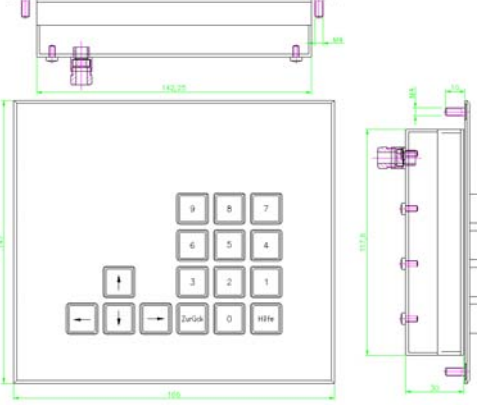
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1510	<p>IK808V5 PS/2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 24 patented R&R keys lift 3 mm, actuation force 1 N vandal proof metal keycaps V5 layout custom design 0°C to +50°C protection class IP 6 5 all around data sheet DNR 8156</p>	
1015	<p>IK808V5-1 RS232C</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 17 patented R&R keys lift 1.2 mm, actuation force 1.5 N 17 vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 9729</p>	
1676	<p>IK808V5-2 PS/2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 140 x 140 x 37 mm patented R&R keys lift 1.2mm, actuation force 1.5 N 23 vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 11146</p>	
1675	<p>IK808V5-3 TTL</p> <p>R&R industrial keyboard housing aluminium anodized (W x H x D) 145 x 122 x 35 mm 12 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 12086</p>	

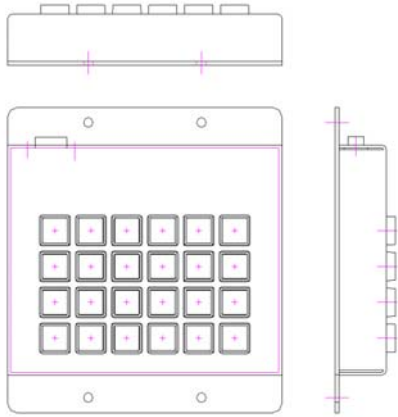
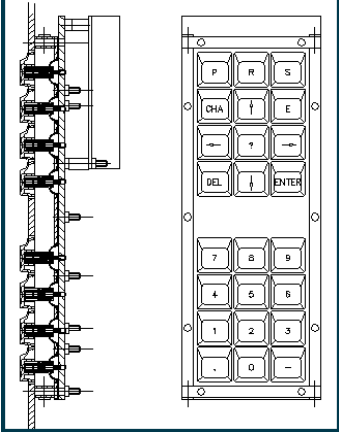
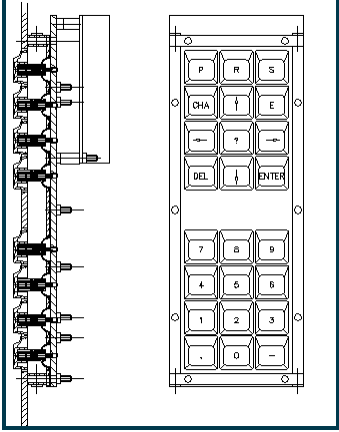
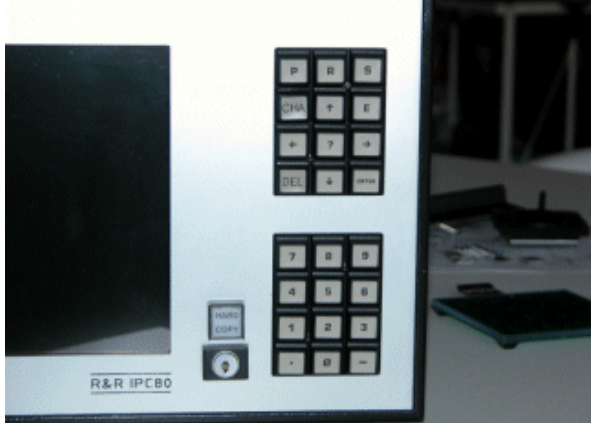
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de


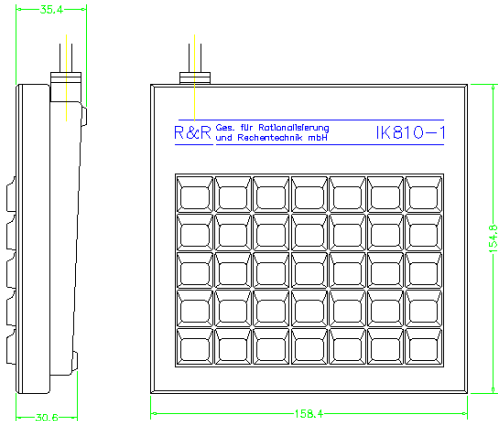
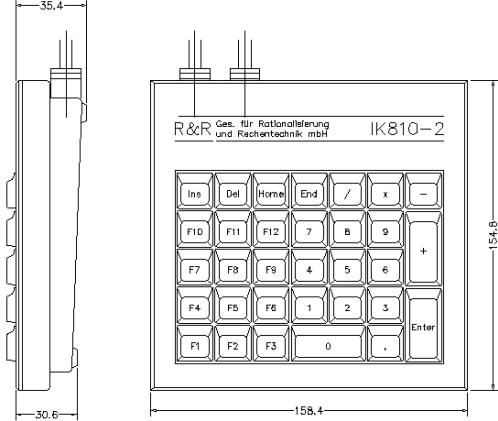

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1685	<p>IK808V5-4 PS/2</p> <p>R&R industrial keyboard housing aluminium anodized (W x H x D) 145 x 122 x 35 mm 24 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 12369</p>	
1684	<p>IK808V5-5 PS/2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 17 patented R&R keys lift 1.2 mm, actuation force 1.5 N 17 vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 12403</p>	
1690	<p>IK808V5-6 PS/2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 17 patented R&R keys lift 1.2 mm, actuation force 1.5 N 17 vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 12409</p>	
1798	<p>IK808V5-7 PS/2</p> <p>R&R industrial keyboard mountable case front panel aluminium anodized (W x H x D) 166 x 147 x 25 mm 17 patented R&R keys lift 1.2 mm, actuation force 1.5 N 17 vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 13174</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

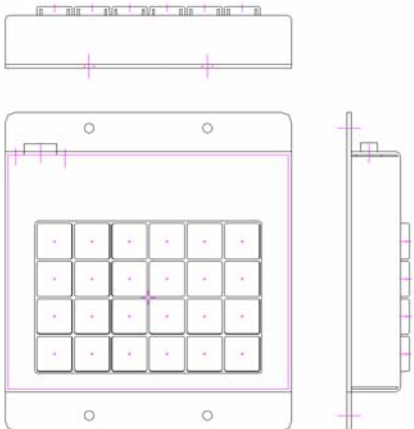

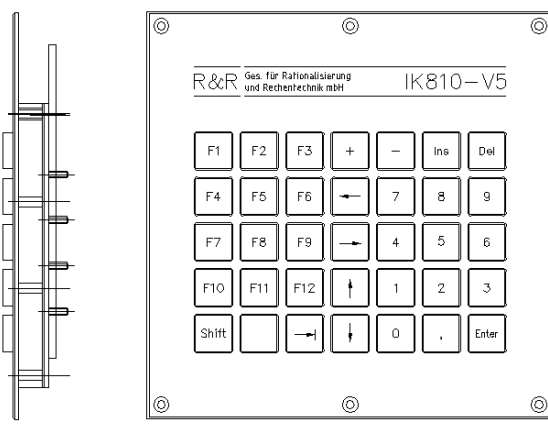

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1820	<p>IK808V5-8 RS232C</p> <p>R&R industrial keyboard housing aluminium anodized (W x H x D) 145 x 162 x 35 mm 24 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metal keycaps V5 0°C to +50°C protection class IP 6 5 data sheet DNR 13425</p>	
677	<p>IK81 8 bit parallel with strobe</p> <p>R&R Industrial -keyboard mount module Al and PE black (H x W x D) 200,5 x 72,1 x 45 mm 2 x 12 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7748</p>	
675	<p>IK81 AT</p> <p>R&R Industrial -keyboard mount module Al and PE black (H x W x D) 200,5 x 72,1 x 45 mm 2 x 12 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7748</p>	
1663	<p>IK81 8 bit parallel with strobe</p> <p>R&R Industrial -keyboard mount module Al and PE black (H x W x D) 2010,5 x 72,1 x 45 mm 2 x 12 patented R&R-keys lift 3 mm actuation force 1 N 0° C to + 50° C protection class IP 6 5 front side data sheet DNR 7748</p>	

Art.-Nr.	Bezeichnung	Bild
79	<p>IK810 AT</p> <p>R&R industrial keyboard mountable case, Al anodized (W x H x D) 180 x 180 x 30 mm n-key rollover watchdog max. 7 x 5 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 5908</p>	
653	<p>IK810-1 AT</p> <p>R&R industrial keyboard desktop case, front plate Al anodized (W x H x D) 158,4 x 154,8 x 40 mm n-key rollover watchdog max. 7 x 5 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 7623</p>	
654	<p>IK810-2 AT</p> <p>R&R industrial keyboard desktop case, front plate Al anodized (W x H x D) 158,4 x 154,8 x 40 mm n-key rollover watchdog with keyboard switch max. 7 x 5 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 all around data sheet DNR 7625</p>	
249	<p>IK810-F AT</p> <p>R&R industrial keyboard mountable case, Al electrolytic-oxidated (W x H x D) 180 x 180 x 30 mm n-key rollover watchdog max. 7 x 5 patented R&R keys lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 front side data sheet DNR 5908</p>	

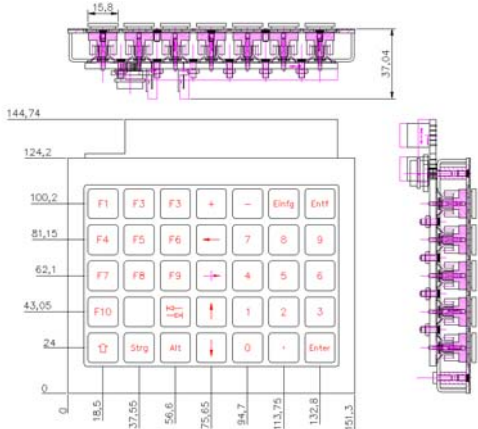
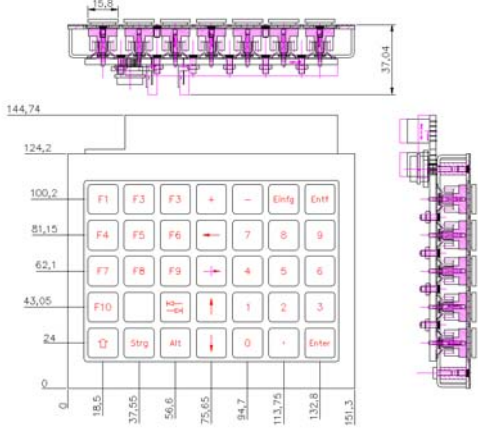


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1822	<p>IK810LT4-1 RS232C</p> <p>R&R industrial keyboard housing aluminium anodized (W x H x D) 160x 190x35 mm 35 patented R&R keys lift 1.2 mm, actuation force 1.5 N plastic key cap LT4 0°C to +50°C protection class IP 6 5 data sheet DNR 13444</p>	
911	<p>IK810V5 AT with housing</p> <p>R&R industrial keyboard desktop case, Al anodized (W x H x D) 170 x 170 x 30 mm n-key rollover watchdog max. 7 x 5 patented R&R keys metal key top V5 lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 front panel data sheet DNR 8558</p>	
805	<p>IK810V5 AT</p> <p>R&R industrial keyboard mountable case, Al anodized (W x H x D) 170 x 170 x 30 mm n-key rollover watchdog max. 7 x 5 patented R&R keys metal key top V5 lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 front panel data sheet DNR 8558</p>	
1509	<p>IK810V5 PS/2 with housing</p> <p>R&R industrial keyboard desktop case, Al anodized (W x H x D) 170 x 170 x 30 mm n-key rollover watchdog max. 7 x 5 patented R&R keys metal key top V5 lift 3 mm, actuation force 1 N layout custom design protection class IP 6 5 data sheet DNR 8558</p>	

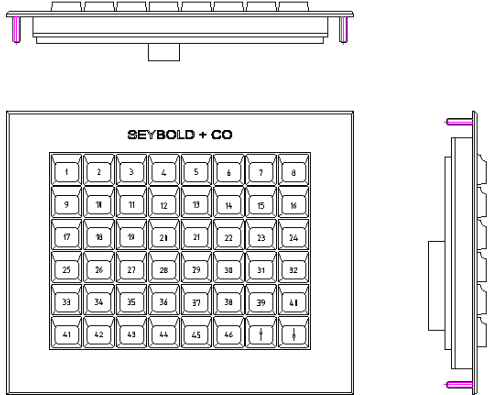
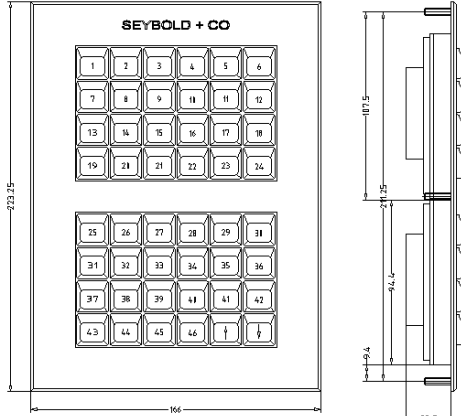
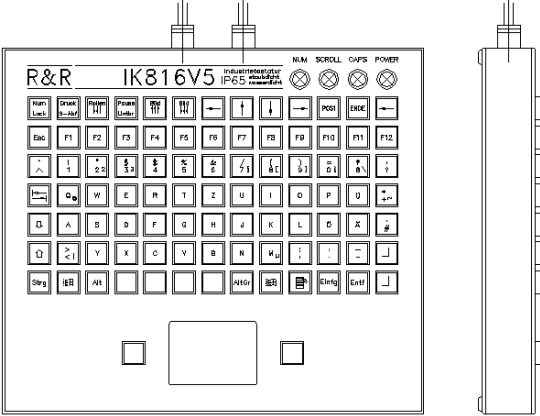
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1818	IK810V6 mounting help	
1817	IK810V6 R&R industrial keyboard mountable case (W x H x D) 152 x 145 x 37 mm n-key rollover watchdog max. 7 x 5 patented R&R keys metal key top V6 lift 1.2 mm, actuation force 1.5 N layout custom design protection class IP 6 5 front panel data sheet DNR 13379	
166	IK811 R&R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 166 x 128 x 26 mm 4 x 6 patented R&R keys lift 3 mm, actuation force 1 N lifetime > 3 million cycles front side IP 6 5 10-pin Molex socket binary coded + strobe / 24 V data sheet DNR 6063	
486	IK813 R&R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 204.1 x 128 x 26 mm 4 x 8 patented R&R keys lift 3 mm, actuation force 1 N lifetime > 3 million cycles front side IP 6 5 10-pin Molex socket binary coded + strobe / 24 V data sheet DNR 6900	


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
663	<p>IK814</p> <p>R&R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 204,1 x 166,1 x 26 mm 6 x 8 patented R&R keys lift 3 mm, actuation force 1 N lifetime > 3 million cycles front side IP 6 5 10-pin Molex socket binary coded + keydown signal data sheet DNR 7654</p>	
669	<p>IK815</p> <p>R&R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 166 x 223,25 x 26 mm 8 x 6 patented R&R keys lift 3 mm, actuation force 1 N lifetime > 3 million cycles front side IP 6 5 2 interfaces with 10-pin Molex socket binary coded + strobe / 24 V data sheet DNR 7700</p>	
842	<p>IK816V5 PS2/PS2</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 277 x 240 x 42,5 mm 91 patented R&R-keys metal key tops V5 lift 3 mm, actuation force 1 N watchdog cable 3 m protection class IP 6 5 all around data sheet DNR 8787</p>	
1358	<p>IKF-345 Penta Folientastatur 3 farbig incl Anbauehäuse aluminiumfarben lackiert Frontplatte ähnlich DNR 10300 DNR 11663</p>	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1546	IKF-345 R&R LOGO R&R Folientastatur 3 farbig 92 Tasten, 1 Drehtaster (BxHxT) 312 x 158.3 x18 mm Einbaumodul DNR 11663	
1547	IKF-345 R&R LOGO Folientastatur 3 farbig incl Anbaugehäuse aluminiumfarben lackiert Frontplatte ähnlich DNR 10300 DNR 11663	
923	IKF-ABP16/32 Halterung	
922	IKF-ABP32 Interbus-S R&R Folientastatur (HxBxT) 240 x 204 x 48 mm 32 2farbige Leuchttasten 32 digitale Eingänge Schnittstelle Interbus S Stromversorgung 24V DC Datenblatt DNR 9462	 <p>The image shows a rectangular keyboard unit with a blue faceplate. At the top left, the 'ALSTOM' logo is visible, and at the top right, the model number 'ABP32' is printed. The keyboard consists of four rows of keys: the top row has 12 keys, the second row has 10 keys, the third row has 10 keys, and the bottom row has 10 keys. On the right side of the unit, there are four indicator lights labeled 'RD', 'RC', 'SA', and 'RD' from top to bottom.</p>

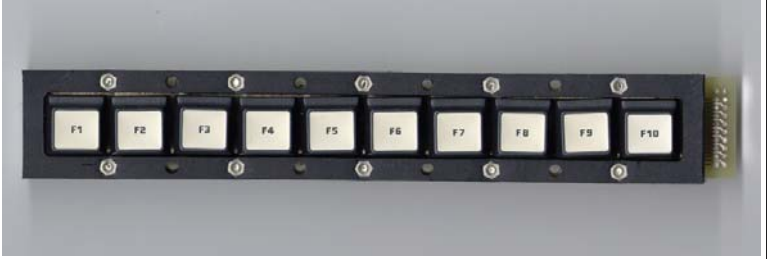
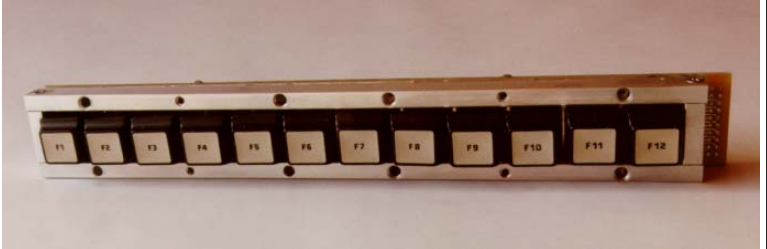

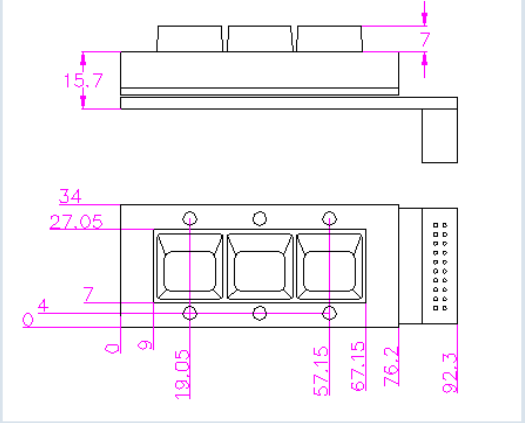
R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
959	<p>IKF-W95 PS2 german</p> <p>R&R industrial keyboard desktop case aluminium anodized inscription white / blue (BxHxT) 470 x 166 x 24 mm R&R short lift keys DNR 5736 behind oil resistive PU foil lift 1.5 mm actuation force 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 9413</p>	
701	<p>IKF102 PS2</p> <p>R&R Industrietastatur Verbundfrontplatte Aluminium mit Polyurethan folie, matt strukturiert Rückseite offen Beschriftung 4farbig bedruckt (BxHxT) 330 x 170 x 20 mm R&R Kurzhubtaster DNR 5736 Hub 1.5 mm Betätigungskraft 4.5 N Lebensdauer > 2 Millionen Schaltzyklen Schutzart IP 65 (staub- und wasserdicht) 3 m Kabel Datenblatt DNR 7899</p>	
195	<p>IKF7x13 AT</p> <p>R&R foil keyboard Al-compound front panel (W x H x D) 282 x 164 x 10 (25) mm polyester foil with protective laminate printed by color laser printer printing freely choosable R&R short lift keys DNR 5736 lift 1.5 mm actuation force 4.5 N front side IP 6 5 10-pin Molex socket data sheet DNR 6183</p>	
121	<p>IKFR1</p> <p>R&R industrial keyboard AT 19" / 4 HE mounting case front panel aluminium electrolytic-oxidated (W x H x D) 482 x 177 x 40 mm 93 patented R&R keys lift 3 mm, actuation force 1 N 3 m cable weight 3.4 kg protection class IP 6 5 all round data sheet DNR 3038</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
180	<p>IKFTL10</p> <p>R&R industrial keyboard (W x H x D) appr. 33 x 213.2 x 30 mm 10 patented R&R keys lift 3 mm, actuation force 1 N matrix interface protection class IP 6 5 front side data sheet DNR 6116</p>	
150	<p>IKFTL12</p> <p>R&R industrial keyboard (W x H x D) appr. 33 x 151.6 x 30 mm 12 patented R&R keys lift 3 mm, actuation force 1 N matrix interface load up to 30V / 10 mA weight appr. 215 g protection class IP 6 5 front side data sheet DNR 4083</p>	
151	<p>IKFTL16</p> <p>R&R industrial keyboard sealing frame PE black (W x H x D) appr. 33 x 328 x 30 mm 16 patented R&R keys lift 3 mm, actuation force 1 N matrix interface 2-row 20-pin socket weight appr. 230 g protection class IP 6 5 front side data sheet DNR 4084</p>	
584	<p>IKFTL3</p> <p>R&R industrial keyboard (W x H x D) appr. 92,3 x 34 x 30 mm 3 patented R&R keys lift 3 mm, actuation force 1 N matrix interface protection class IP 6 5 front side data sheet DNR 7366</p>	 <p>Technical drawing of the IKFTL3 industrial keyboard showing dimensions in millimeters:</p> <ul style="list-style-type: none"> Overall height: 15.7 Key height: 7 Overall width: 92.3 Distance from left edge to first key center: 18.05 Distance between key centers: 27.05 Distance from left edge to second key center: 34 Distance from left edge to third key center: 57.15 Distance from left edge to right edge of key: 67.15 Distance from left edge to right edge of keyboard: 76.2 Distance from left edge to 20-pin socket: 92.3 Pin pitch: 2.5 Pin diameter: 0.4 Pin offset: 0.9

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
585	<p>IKFTL7V</p> <p>R&R industrial keyboard (W x H x D) appr. 40 x 205 x 30 mm 7 patented R&R keys lift 3 mm, actuation force 1 N matrix interface protection class IP 6 5 front side data sheet DNR 6766</p>	
119	<p>IKIBM-1HE</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr. 11° tiltable front panel Al elox (W x H x D) 483 x 44 x 380 mm MF2-layout 93 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 3033</p>	
175	<p>IKIBM-MF2 AT -30°C to +80°C</p> <p>R&R industrial keyboard AL sand cast lacquered front panel Al elox (W x H x D) 505 x 250 x 35(52) mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog weight appr. 5.7 kg protection class IP 6 5 all around data sheet DNR 3033</p>	
88	<p>IKIBM-MF2 AT</p> <p>R&R industrial keyboard AL sand cast lacquered front panel Al elox (W x H x D) 505 x 250 x 35(52) mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog weight appr. 5.7 kg protection class IP 6 5 all around data sheet DNR 3033</p>	



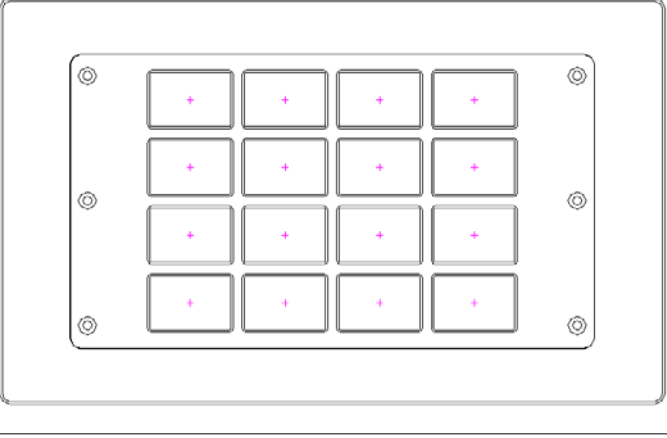
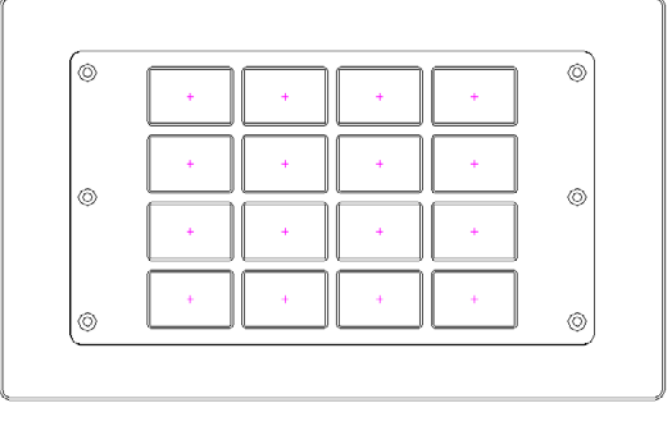
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
118	IKIBM1 AT R&R industrial keyboard AL sand cast lacquered cover Al elox (W x H x D) 440 x 250 x 35(45) mm 93 patented R&R keys incl. 16 function keys lift 3 mm, actuation force 1 N watchdog protection class IP 6 5 all around data sheet DNR 2998	 A photograph of a blue industrial keyboard with a white top surface and black keys. It has a numeric keypad on the right side and a cable extending from the left.
1007	IKL 4poliges Kabel 5 m für IKL4-102, -103, -110, I/O-Modul M100	
1739	IKL-118 LT1 4x3 LED Ethernet RR-P-411 Ethernetcontroller R&R LT1-Taste 30x20 mm, Beleuchtung LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	 A photograph of a rectangular keypad with a silver metal frame and a red background. It features a 4x3 grid of 12 numbered buttons (1-12) and four screws at the corners.
1726	IKL-118 LT1 4x3 LED Interbus-S Interbus-S Controller RR-P-316 R&R Leuchttaste LT1 30x20 mm, Beleuchtung LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC 16 digitale Eingänge BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	 A photograph of a rectangular keypad with a silver metal frame and a red background. It features a 4x3 grid of 12 numbered buttons (1-12) and four screws at the corners.

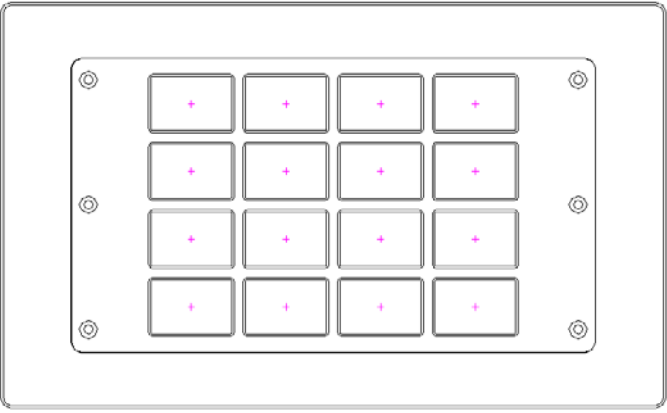
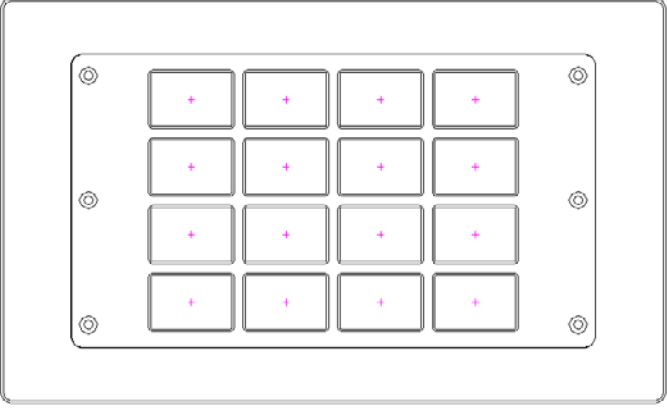
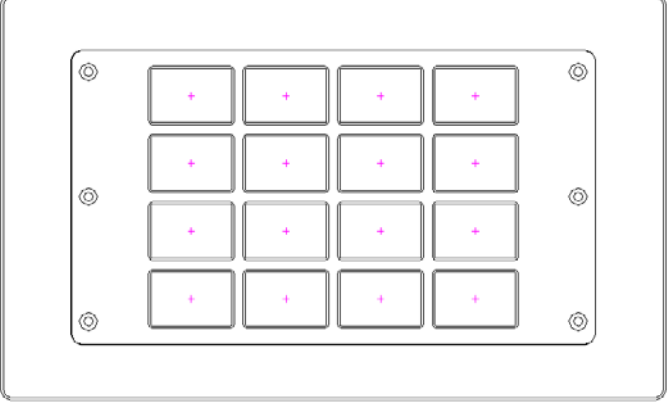
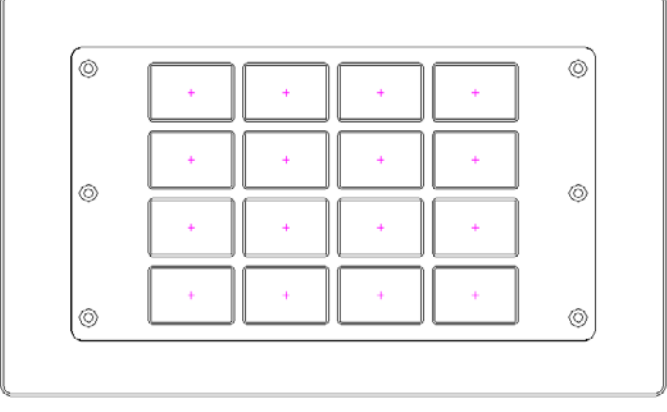
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1845	IKL-118 LT1 4x3 LED-4x Ethernet RR-P-411 Ethernetcontroller R&R LT1-Taste 30x20 mm, Beleuchtung LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1725	IKL-118 LT1 4x3 LED-4x Interbus-S Interbus-S Controller RR-P-316 R&R Leuchttaste LT1-Taste 30x20 mm Beleuchtung RRP320-4xSMD-LED 2farbig 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1730	IKL-118 LT1 4x4 LED Ethernet serieller Controller RR-P-395 + Ethernetcontroller R&R LT1-Taste 30x20 mm, Beleuchtung LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1723	IKL-118 LT1 4x4 LED Interbus-S Interbus-S Controller RR-P-316, R&R Leuchttaste LT1-Taste 30x20 mm LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	

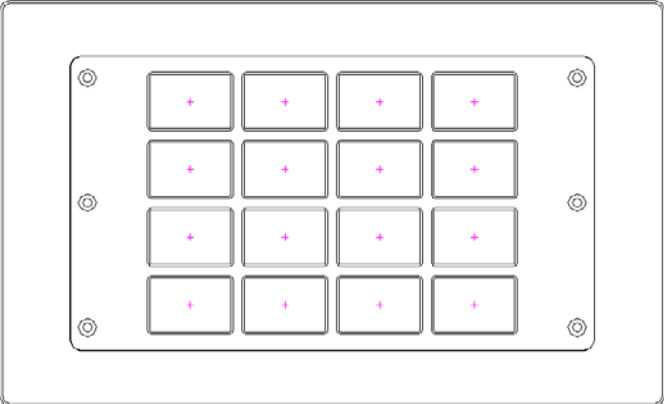
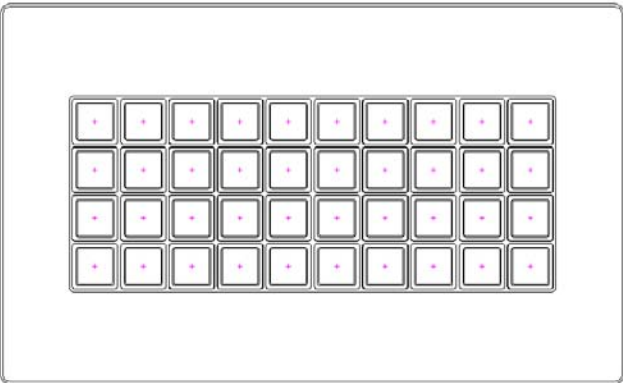
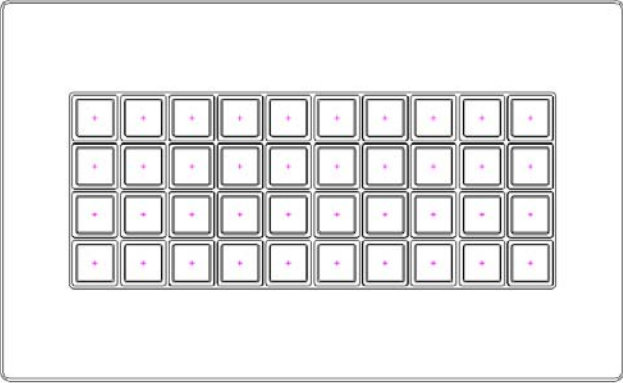
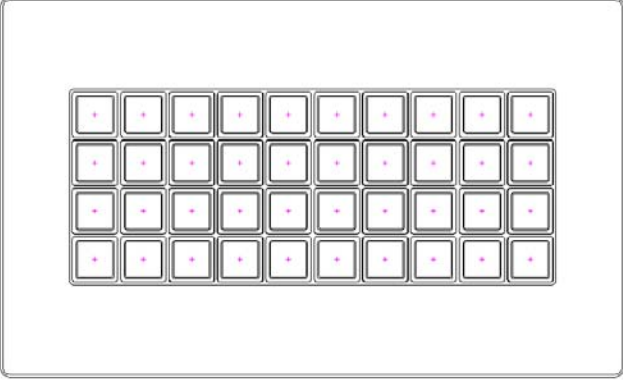
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1728	IKL-118 LT1 4x4 LED RS232C/422/485 serieller Controller RR-P-395 R&R LT1-Taste 30x20 mm, Beleuchtung LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1729	IKL-118 LT1 4x4 LED-4x Ethernet serieller Controller RR-P-395 + Ethernetcontroller R&R LT1-Taste 30x20 mm, Beleuchtung RRP320-4xSMD-LED 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1724	IKL-118 LT1 4x4 LED-4x Interbus-S Interbus-S Controller RR-P-316 R&R Leuchttaste LT1 30x20 mm, Beleuchtung RRP320-4xSMD-LED 2farbig 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1850	IKL-118 LT1 4x4 LED-4x Profibus Profibus Controller RR-P-377 R&R Leuchttaste LT1 30x20 mm, Beleuchtung RRP320-4xSMD-LED 2farbig 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	

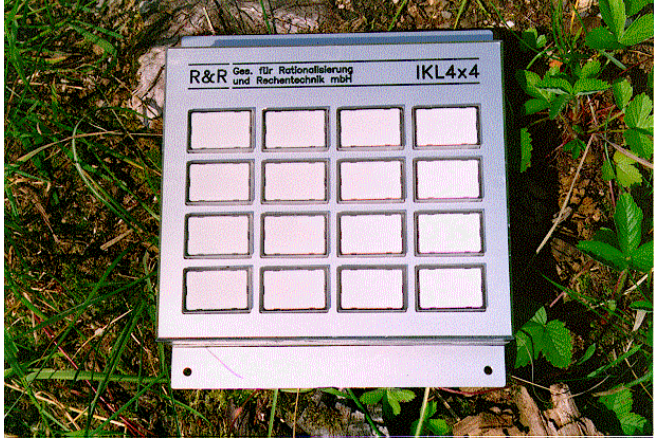
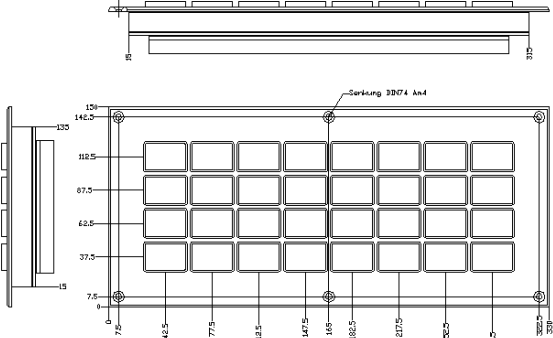
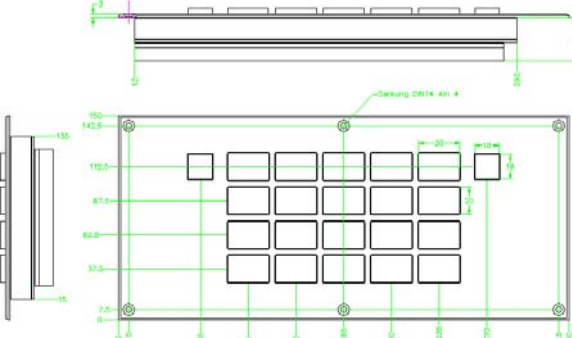
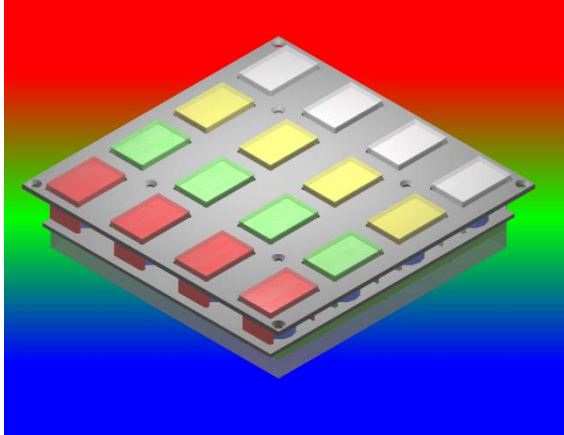
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

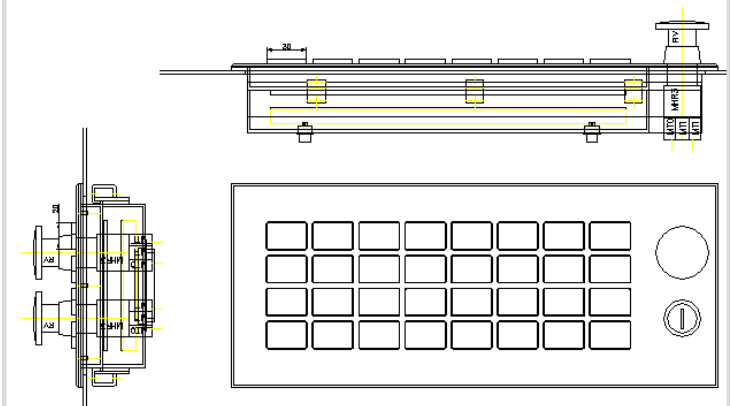
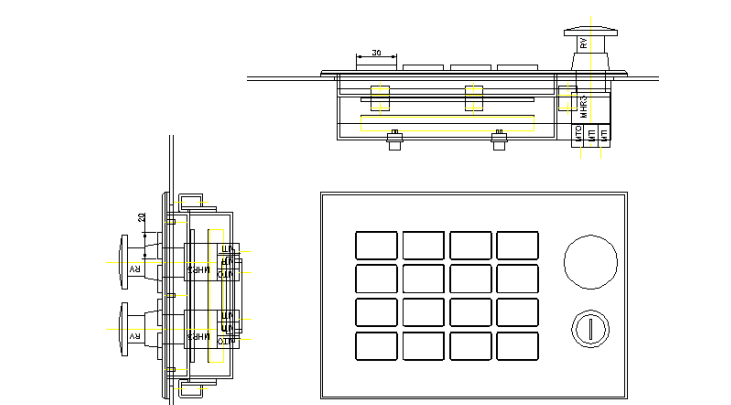


Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1727	IKL-118 LT1 4x4 LED-4x RS232C/422/485 serieller Controller RR-P-395 R&R Leuchttaste LT1 30x20 mm, Beleuchtung RRP320-4xSMD-LED 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 80 mm Datenblatt DNR 12756	
1733	IKL-118 LT4 10x4 LED Ethernet serieller Controller RR-P-395 + Ethernetcontroller 40 R&R Leuchttasten LT4 18x18 mm LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1731	IKL-118 LT4 10x4 LED Interbus-S Interbus-S Controller RR-P-316 40 x R&R Leuchttasten LT4 18x18 mm LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC 32 digitale Eingänge BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	
1732	IKL-118 LT4 10x4 LED RS232C/422/485 serieller Controller RR-P-395 40 x R&R Leuchttaste LT4 18x18 mm LED 3mm 2farbig, 1.2mm Hub, 1N Frontplatte Aluminium eloxiert, Stromversorgung 24V DC BxHxT ca. 246 x 150 x 80 mm Datenblatt DNR 12756	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de



Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
52	<p>IKL-4x4 RS485</p> <p>R&R industrial keyboard wall mount case Al elox (W x H x D) 180 x 160 x 38 mm 4x4 R&R illuminated keys type LT1 power supply 24 V / 700 mA regulated protection class IP 6 5 all around weight 950 g watchdog data sheet DNR 5795</p>	
665	<p>IKL1-100 RS485</p> <p>OR&R Industrial keyboard case mountable case front plate aluminium elox sealing frame PE black (H x W x D) 330 x 150 x 39 mm layout 4x8 LT1 R&R luminous-key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7692</p>	
550	<p>IKL1-101 RS485</p> <p>OR&R Industrial keyboard case mountable case front plate aluminium elox sealing frame PE black (H x W x D) 330 x 150 x 39 mm layout 4x5 LT1- and 2 x LT2-keys (max. 4 x 7 keys) patented R&R luminous-key LT1=30 x 20mm/LT2 = 18 x 18 mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7119</p>	
815	<p>IKL1-102 RS422</p> <p>R&R Industrial keyboard case mountable case front plate aluminium anodized (H x W x D) 159,8 x 159,8 x 37 mm layout 4x4 R&R luminous-key LT1#key cap=30 x 20mm key cap PC colorless UV-stabilized illumination 2 colour LED silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 8569</p>	

Art.-Nr.	Bezeichnung	Bild
1013	IKL1-104 Profibus DP OR&R Industrial keyboard case mountable case front plate aluminium anodized (H x W x D) 368 x 154 x 60 mm layout 4x8 LT1 R&R luminous-key LT1 key cap=30 x 20mm key cap PC colorless, UV-stabilized illumination 4 x 2color LED silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC place for 2 times 22 mm switches data sheet DNR 9716	
1014	IKL1-104 Profibus DP OR&R Industrial keyboard case mountable case front plate aluminium anodized (H x W x D) 228 x 154 x 60 mm layout 4x8 LT1 R&R luminous-key LT1 key cap=30 x 20mm key cap PC colorless, UV-stabilized illumination 4 x 2color LED silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC place for 2 times 22 mm switches data sheet DNR 9727	
920	IKL1-14x1 with high graded steel inlays R&R mountable keyboards (H x B x T) 464 x 60 x 30 mm 14 vandal proofed R&R keys LT1 stainless steel inlays 36x16 mm, mounted by customer lift 1,5 mm, actuation force 2 N data sheet DNR 9298	
1745	IKL1-200 LED 3mm RS232C OR&R Industrial keyboard case mountable case front plate aluminium elox (H x W x D) 600 x 350 x 42 mm layout 12x16 R&R LT1 luminous-key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination LED 3 mm red/green silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7695	




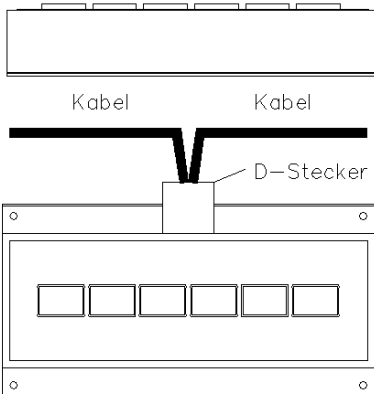
R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
666	IKL1-200 RS485 OR&R Industrial keyboard case mountable case front plate aluminium elox (H x W x D) 600 x 350 x 42 mm layout 12x16 R&R LT1 luminous-key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7695	
1671	IKL1-3x12 RS422T R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 88,1 x 483 x 40 mm layout 3x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless UV-stabilized illumination 4x bicolor SMD LED silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7782	
682	IKL1-3x12 RS232C R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 88,1 x 483 x 40 mm layout 3x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7782	
1670	IKL1-3x12 RS422 R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 88,1 x 483 x 40 mm layout 3x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7782	


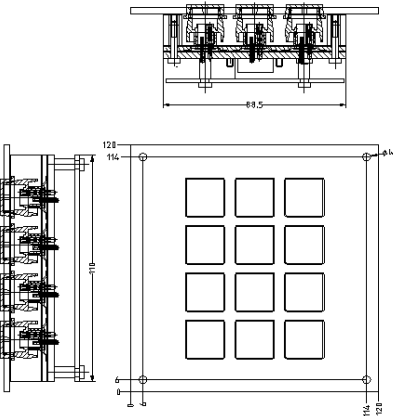
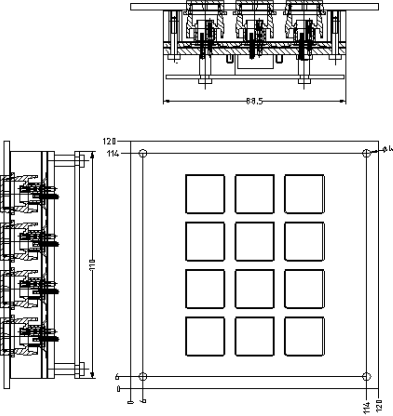

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1799	IKL1-3x12-2 RS232C R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 108,1 x 483 x 40 mm layout 3x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7782	
1628	IKL1-4x12 RS422 R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 132,2 x 483 x 40 mm layout 4x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 12152	
1672	IKL1-4x12 RS422 R&R Industrial keyboard front plate aluminium elox sealing frame PE black (H x W x D) 132,2 x 483 x 40 mm layout 4x12 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 12152	
785	IKL1-6x1 RS422 R&R Industrial keyboard housing St laquered front front plate aluminium anodized (H x W x D) 132 x 256 x 45 mm layout 6x1 LT1 illuminated key LT1 key cap=30 x 20mm key cap PC red UV-stabilized illumination LED red silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC 35 mA data sheet DNR 8339	

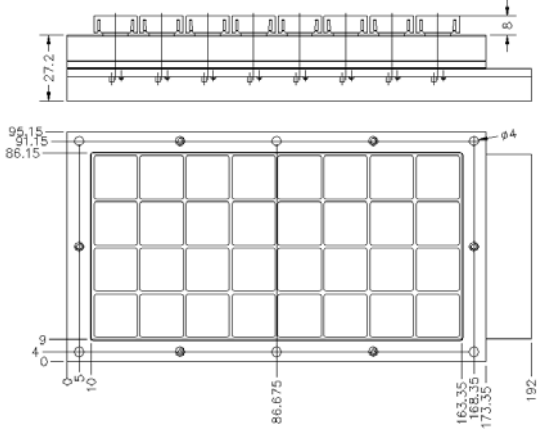
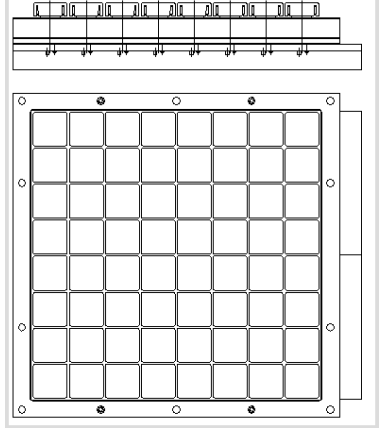


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
469	<p>IKL2-12</p> <p>R&R industrial keyboard mount case (W x H x D) 86 x 110 x 42 mm 4 x 3 vandal-proof R&R illuminated keys LT2 lift 1.5 mm, actuation force 2 N matrix 2 x 6 diode decoupled micro light bulbs T1 28V weight appr. 0.5 kg protection class IP 6 5 front side data sheet DNR 6797</p>	
470	<p>IKL2-12A</p> <p>R&R industrial keyboard front plate stainless steel V4A (W x H x D) 120 x 120 x 42 mm 4 x 3 vandal-proof R&R illuminated keys LT2 lift 1.5 mm, actuation force 2 N matrix 2 x 6 diode decoupled micro light bulbs T1 28V weight appr. 0.5 kg protection class IP 6 5 front side data sheet DNR 6800</p>	
478	<p>IKL2-12B</p> <p>R&R industrial keyboard front plate Al (W x H x D) 120 x 120 x 42 mm 4 x 3 vandal-proof R&R illuminated keys LT2 lift 1.5 mm, actuation force 2 N matrix 2 x 6 diode decoupled micro light bulbs T1 28V weight appr. 0.5 kg protection class IP 6 5 front side data sheet DNR 6848</p>	
1669	<p>IKL4-1 1N LED rot</p> <p>Tastaturmodul für TR123-2 linke Maustaste, incl. Kabel DNR 12283</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
603	IKL4-100 RS422 OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 95,2 x 192 x 35 mm layout 4x8 LT4 LT2-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7476	
604	IKL4-101 RS422 R&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 171,4 x 192 x 35 mm layout 8x8 LT4 LT2-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7477	
1298	IKL4-102 Profibus OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 76,2 x 173,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7512	
641	IKL4-102 RS422 OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 76,2 x 173,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7512	

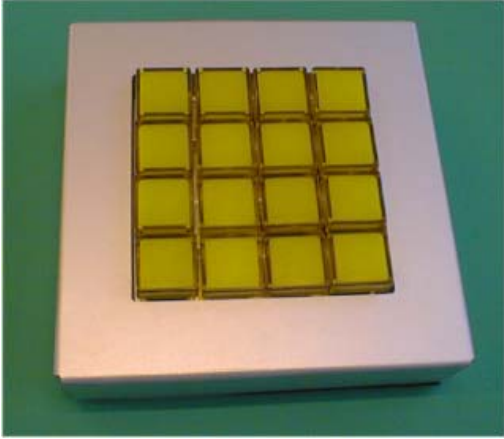
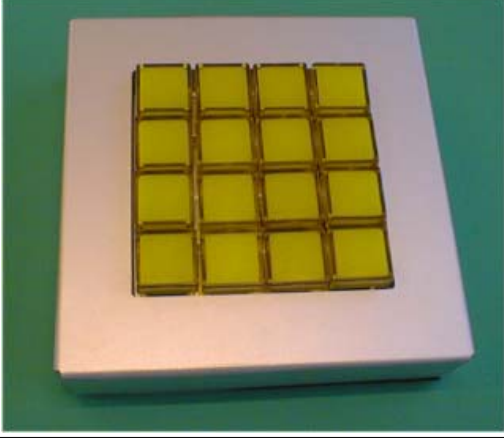

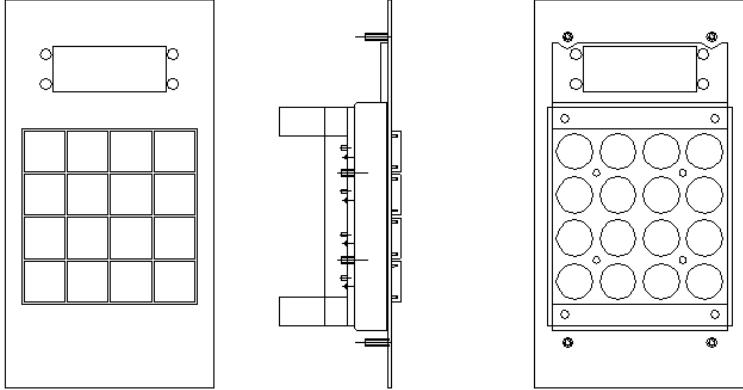
R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
642	IKL4-103 RS422 R&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 96,2 x 152,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 7515	
1701	IKL4-104A R&R Industrial keyboard case mountable (H x W x D) 96,2 x 76,2 x 40 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC interfaces: one common pin, one pin for every lamp or key (24V/10mA) data sheet DNR 7777	
681	IKL4-104 R&R Industrial keyboard case mountable (H x W x D) 96,2 x 76,2 x 40 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC interfaces: one common pin, one pin for every lamp or key (24V/100mA) data sheet DNR 7777	
814	IKL4-105 LED yellow R&R Industrial keyboard desktop case Aluminium anodized, PE black (H x W x D) 121,2 x 121,2 x 35 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination LED with resistor for 24 V/DC silicon switching pad with 1,5 mm lift and 2 N actuation force 30V / 10 mA lifetime > 3 million cycles interfaces: one common pin, one pin for every lamp or key D-SUB male plug 37 pins data sheet DNR 8531	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
800	IKL4-105 without micro bulbs R&R Industrial keyboard desktop case Aluminium anodized, PE black (H x W x D) 121,2 x 121,2 x 35 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized silicon switching pad with 1,5 mm lift and 2 N actuation force, 30V / 10mA lifetime > 3 million cycles interfaces: one common pin, one pin for every lamp or key D-SUB male plug 37 pins data sheet DNR 8531	
799	IKL4-105 R&R Industrial keyboard desktop case Aluminium anodized, PE black (H x W x D) 121,2 x 121,2 x 35 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force 30V / 10 mA lifetime > 3 million cycles interfaces: one common pin, one pin for every lamp or key D-SUB male plug 37 pins data sheet DNR 8531	
807	IKL4-106 R&R Industrial keyboard desktop case Aluminium anodized (H x W x D) 132 x 112 x 62 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force 30V / 10 mA lifetime > 3 million cycles interfaces: one common pin, one pin for every lamp or key Keys: SUB-D female plug 25 pins lamps: SUB-D male plug 25 pins data sheet DNR 8578	
865	IKL4-107 illuminated R&R Industrial keyboard front panel Aluminium anodized black (H x W x D) 171 x 92 x 28 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force 30V / 10 mA lifetime > 3 million cycles interfaces: one common pin, one pin for every lamp or key D-SUB 25 pins male and female data sheet DNR 8895	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
866	IKL4-107 R&R Industrial keyboard front panel Aluminium anodized black (H x W x D) 171 x 92 x 28 mm layout 4x4 LT4-keys key cap PC colorless, red, yellow or green UV-stabilized silicon switching pad with 1,5 mm lift and 2 N actuation force 30V / 10 mA lifetime > 3 million cycles interfaces: one common pin, one pin for every key D-SUB 25 pins male data sheet DNR 8895	
1686	IKL4-108 RS422 OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 76,2 x 173,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless UV-stabilized illumination LED 3 mm red silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 9578	
1687	IKL4-109 red RS422 OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 96,2 x 152,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless UV-stabilized illumination LED 3 mm red silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 9579	
1008	IKL4-110 RS422 OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D) 76,2 x 173,4 x 40 mm layout 4x8 LT4 luminous-keys key cap PC colorless UV stabilized illumination 3 mm LED red/green silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 9707	

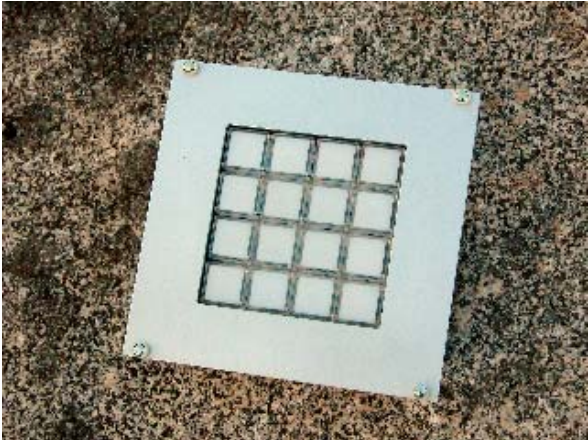
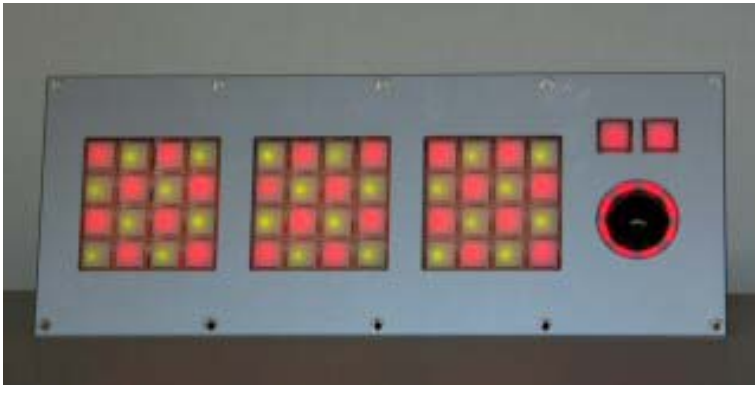
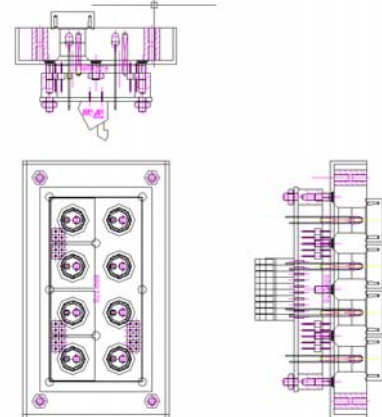
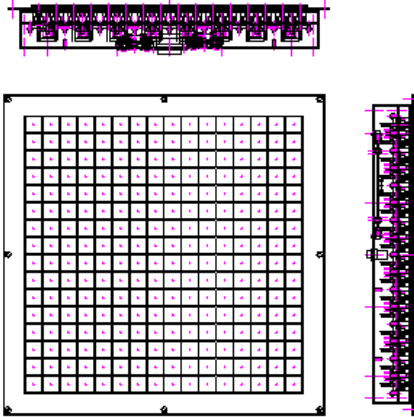
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

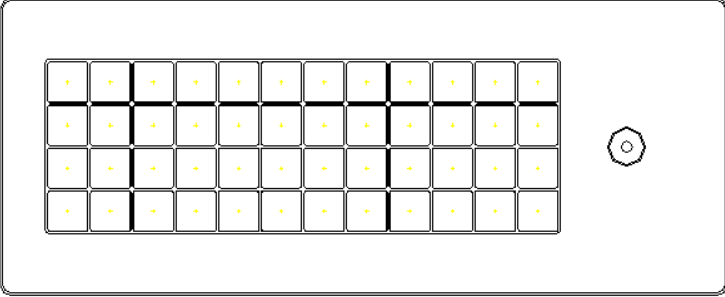
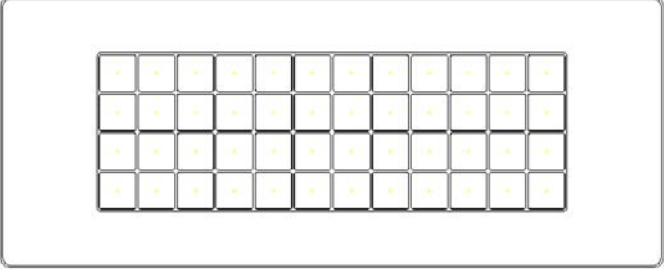
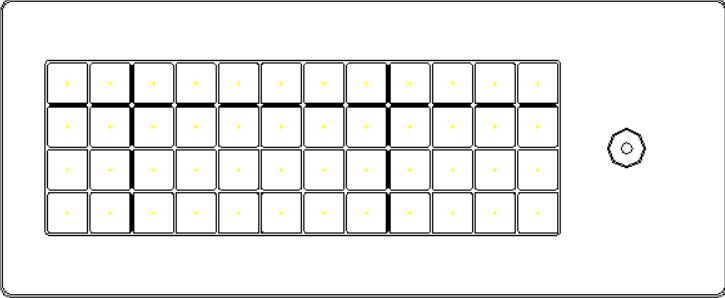
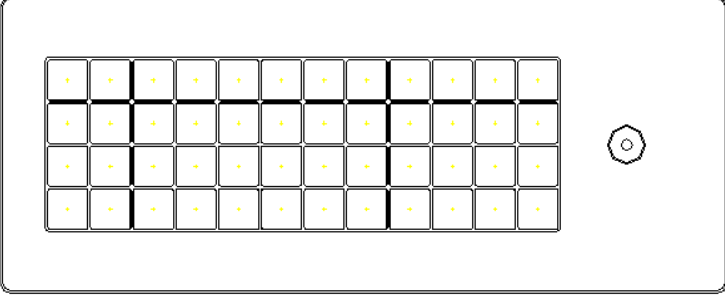
Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

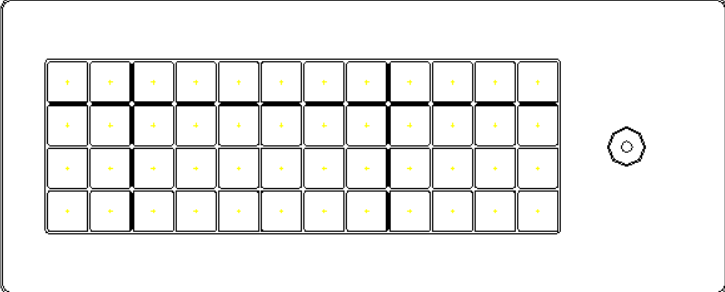

Art.-Nr.	Bezeichnung	Bild
1299	IKL4-111 Profibus OR&R Industrial keyboard case mountable case sealing frame PE black (H x W x D)76,2 x 173,4 x 40 mm layout 4x8 LT4-luminous-keys key cap PC colorless, red, yellow or green UV-stabilized illumination micro light bulbs T1 silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 10585	
1454	IKL4-112 Profibus Leuchttastatur Gehäuse Aluminium eloxiert ca. 284 x244 x 43 mm 8x5 (max. 8x6) Leuchttasten LT4 Beleuchtung LED 3 mm, rot, gelb, grün Layout DNR 11356, Datenblatt 11934	
1465	IKL4-113 PS/2 OR&R Industrial keyboard case mountable case (H x W x D) 124 x 126 x 40 mm layout 2x 4x4 LT4 luminous-keys with fingertip key cap PC colorless, UV-stabilized illumination 3 mm LED silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles data sheet DNR 10393	
1688	IKL4-114 vernetzbare R&R Leuchttastatur Pult-Gehäuse Aluminium eloxiert ca. 130 x120 x 45 mm 4x4 Leuchttasten LT4, Alarm-Summer Beleuchtung LED 3 mm, rot, gelb, grün Schnittstelle: RS232C, RS422 Datenblatt DNR 12405	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

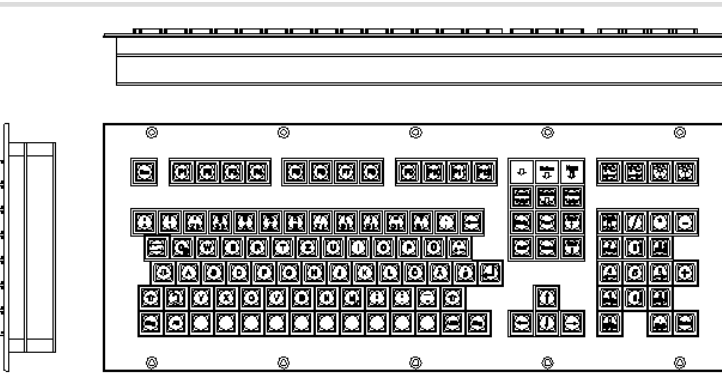
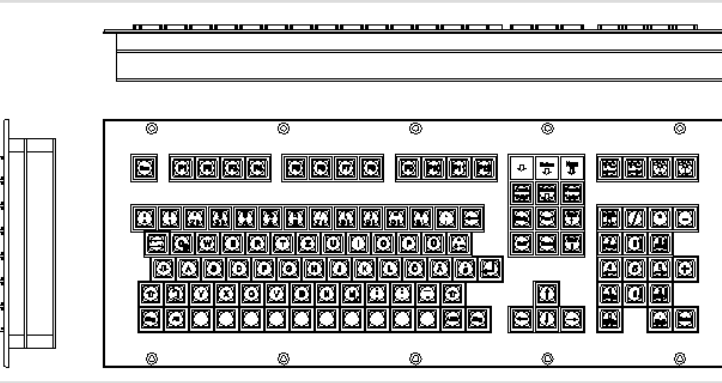
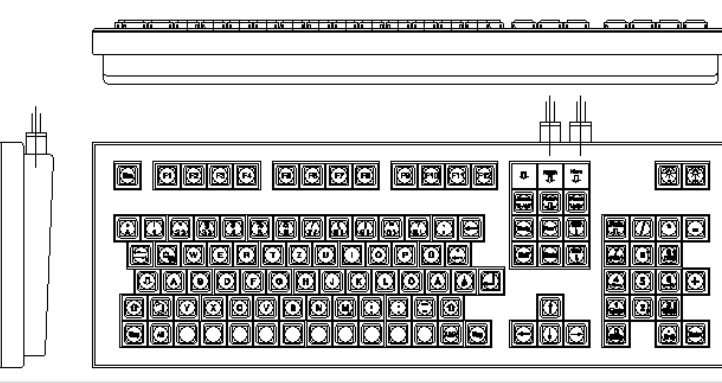
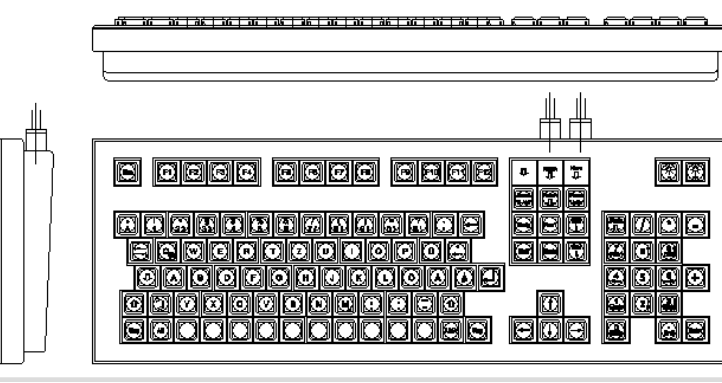
Art.-Nr.	Bezeichnung	Bild
1689	IKL4-115 vernetzbare R&R Leuchttastatur Gehäuse Aluminium eloxiert ca. 131,8 (30 TE) x 128,5 (3HE) x 45 mm 4x4 Leuchttasten LT4 Beleuchtung LED 3 mm, rot, gelb, grün Schnittstelle: RS232C, RS422 Datenblatt DNR 12406	
1696	IKL4-116 RS232C(RS422)/PS2 R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 360 x 174 x 45 mm 48 patented R&R-keys key cap LT4 illumination red/green led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 12451	
1702	IKL4-117 R&R Industrial keyboard case mountable (H x W x D) 106 x 60 x 47 mm layout 4x4 LT4-lighted-keys key cap PC colorless, red, yellow, green UV-stabilized illumination LED 3mm yellow, white, red, green silicon switching pad with 1,5 mm lift and 2 N actuation force lifetime > 3 million cycles 24V DC interfaces: one common pin, one pin for every lamp or key (24V/10mA) data sheet DNR 12498	
1746	IKL4-119 LED 3mm RS232C/RS422 OR&R Industrial keyboard mountable case front plate aluminium anodized (H x W x D) 352 x 352 x 45 mm layout 16x16 R&R LT4 luminous-key LT4 key cap=18 x 18mm key cap PC colorless UV-stabilized illumination LED 3 mm red/green silicon switching pad with 1,5 mm lift and 1 N actuation force lifetime > 3 million cycles 24V DC data sheet DNR 12917	

Art.-Nr.	Bezeichnung	Bild
1813	<p>IKL4-120 RS232C(RS422)</p> <p>R&R Industrial keyboard with integrated joystick modul front plate al anodized (W x H x D) 324 x 132 x 61 mm 48 patented R&R-keys key cap LT4 illumination red/green led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 data sheet 13351</p>	
1814	<p>IKL4-120 RS232C(RS422)</p> <p>R&R Industrial keyboard with integrated joystick modul front plate al anodized (W x H x D) 324 x 132 x 61 mm 48 patented R&R-keys key cap LT4 illumination red/green led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 13351</p>	
1860	<p>IKL4-121 RS232C(RS422)</p> <p>R&R Industrial keyboard front plate al anodized (W x H x D) 130 x 190 x 52 mm 32 patented R&R-keys key cap LT4 illumination red/green led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side open data sheet 13671</p>	
1861	<p>IKL4-121-1 RS232C(RS422)</p> <p>R&R Industrial keyboard front plate al anodized (W x H x D) 130 x 190 x 52 mm 32 patented R&R-keys key cap LT4 illumination red/green led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side open data sheet 13671</p>	

Art.-Nr.	Bezeichnung	Bild
1862	<p>IKL4-121-2 RS232C(RS422)</p> <p>R&R Industrial keyboard front plate al anodized (W x H x D) 130 x 190 x 52 mm 32 patented R&R-keys key cap LT4 illumination led 3mm yellow silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side open data sheet 13671</p>	
1668	<p>IKL4-3 1N LED rot</p> <p>Tastaturmodul für TR123-2, incl. Kabel DNR 8766</p>	
1541	<p>IKL4-318 PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 321 x 144 x 40 mm 64 patented R&R-keys key cap LT4 illumination red led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet 11518</p>	
1512	<p>IKL4-318-T4 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 45 mm 64 patented R&R-keys key cap LT4 illumination red led 3mm silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 6 5 data sheet 11518</p>	

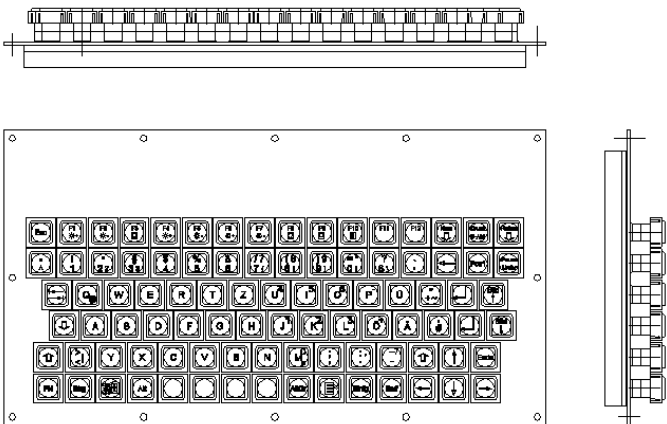
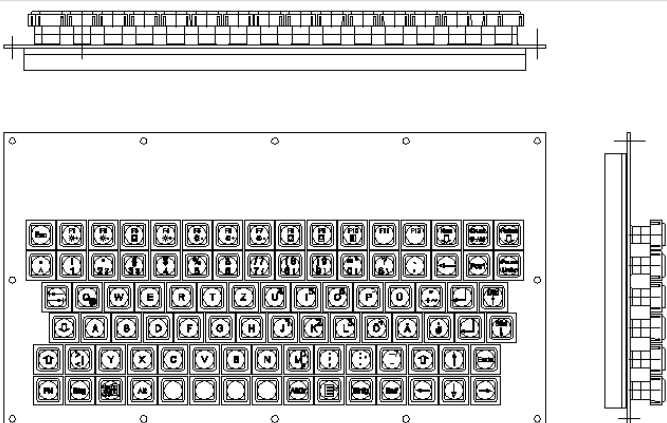
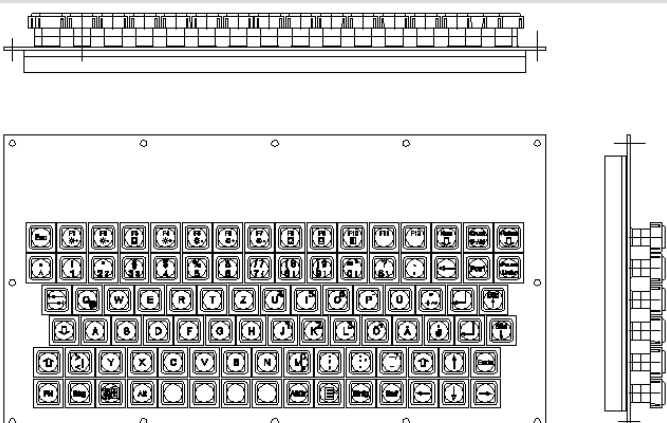
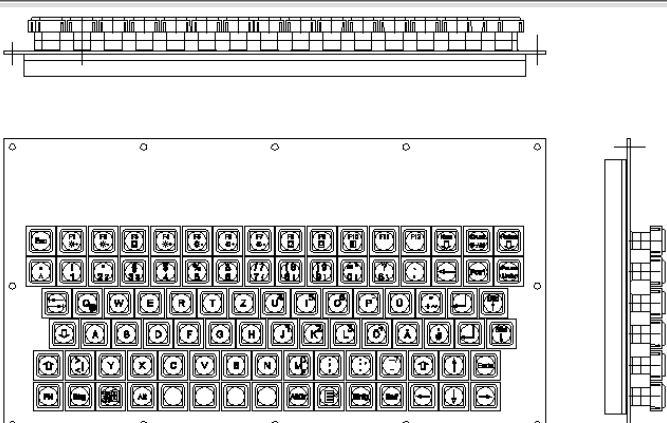
R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
836	<p>IKL4W95 2xPS2</p> <p>Einbauleuchtastatur (BxHxT) ca. 474 x 188,3 x 40 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten LED-Beleuchtung, dimmbar Lebensdauer > 2 Millionen Schaltzyklen Betätigungskraft 1 N 1.5 mm Hub Schnittstellen: 1 x PS2 Tastatur 1 x PS2 Maus 1x Trackball mit Impulsausgang und Leuchttastern Stromversorgung 24V DC, 0.3A Datenblatt DNR 7924</p>	
708	<p>IKL4W95 4xPS2</p> <p>Einbauleuchtastatur (BxHxT) ca. 474 x 188,3 x 40 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten LED-Beleuchtung, dimmbar Lebensdauer > 2 Millionen Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub 2 x PS2 Tastatur 2 x PS2 Maus alle Kanäle sind voll bootfähige umschaltbar zwischen 2 Workstations Anschluß für Trackball mit Impulsausgang und Leuchttastern Datenblatt DNR 7924</p>	
1523	<p>IKL4W95-1 PS2 blau</p> <p>Pultastatur im Nachtdesign Frontplatte AlMg3 hart eloxiert (BxHxT) ca. 460 x 162 x 40 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, blau dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1,2 N 1.5 mm Hub 1 x PS2 Tastatur Stromversorgung 24 V DC Datenblatt DNR 8594</p>	
813	<p>IKL4W95-1 PS2 rot</p> <p>Pultastatur im Nachtdesign Frontplatte AlMg3 hart eloxiert (BxHxT) ca. 460 x 162 x 40 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, rot dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1,2 N 1.5 mm Hub 1 x PS2 Tastatur Stromversorgung 24 V DC Datenblatt DNR 8594</p>	

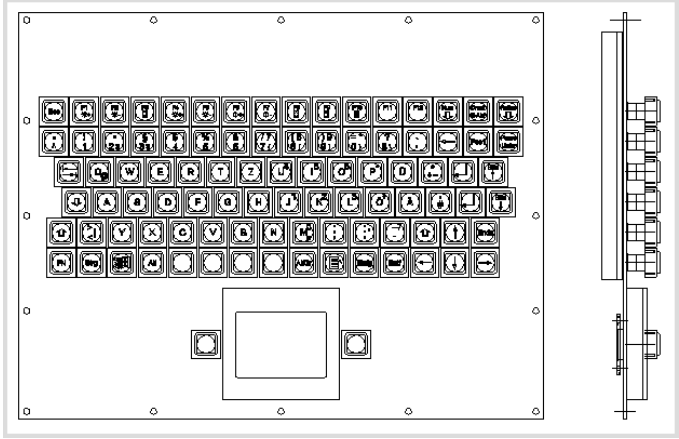

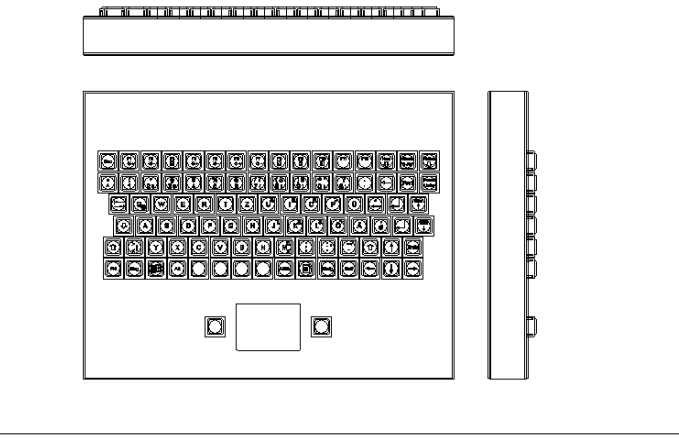
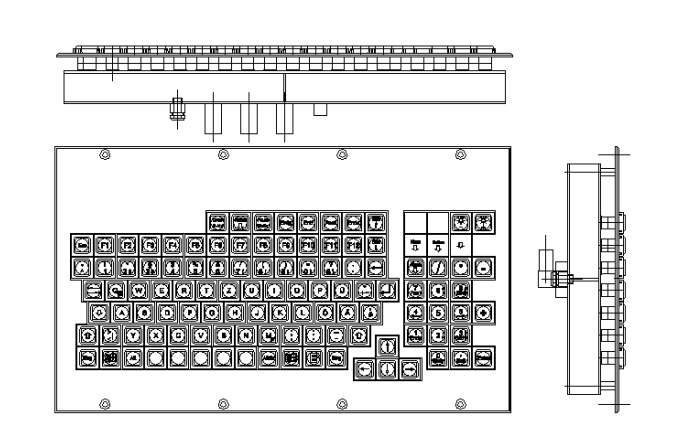
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
838	<p>IKL4W95L PS2</p> <p>Laptoptastatur im Nachtdesign (BxHxT) ca. 330 x 150 x 37,5 mm Tastenanordnung modifiziertes WIN95 93 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub Schnittstelle PS2/AT Stromversorgung 24 V DC Datenblatt DNR 8777</p>	
1515	<p>IKL4W95L-T PS2</p> <p>Laptoptastatur (BxHxT) ca. 150 x 400 x 40 mm Tastenanordnung modifiziertes WIN95 93 LT4 Tasten Kappe mit Fingermulde Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1N 1.5 mm Hub Schnittstelle PS2/PS2 Rollkugel 30mm Schutzart IP65 rundum Datenblatt DNR 11530</p>	
1514	<p>IKL4W95LE-T1 LED PS2</p> <p>Laptopeinbautastatur im Nachtdesign (BxHxT) ca. mm Frontplatte Aluminium eloxiert Tastenanordnung modifiziertes WIN95 93 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1N 1.5 mm Hub Schnittstelle PS2/PS2 Rollkugel 61.5 mm Stromversorgung 24 V DC Schnittstelle galvanisch getrennt Datenblatt DNR 11528</p>	
1516	<p>IKL4W95LE-T1 PS2</p> <p>Laptopeinbautastatur im Nachtdesign (BxHxT) ca. mm Frontplatte Aluminium eloxiert Tastenanordnung modifiziertes WIN95 93 LT4 Tasten Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1N 1.5 mm Hub Rollkugel 61.5 mm schwarz Schnittstelle PS2/PS2 Stromversorgung über Schnittstelle Schnittstelle galvanisch getrennt Datenblatt DNR 11528</p>	

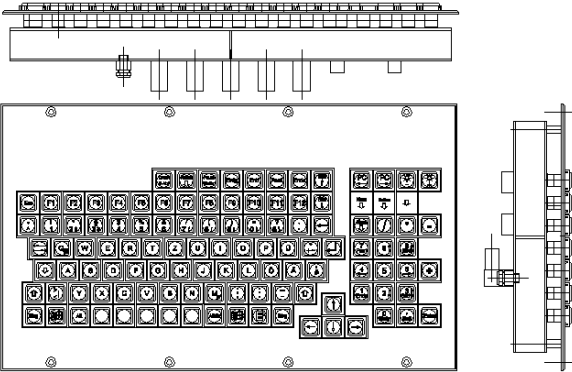
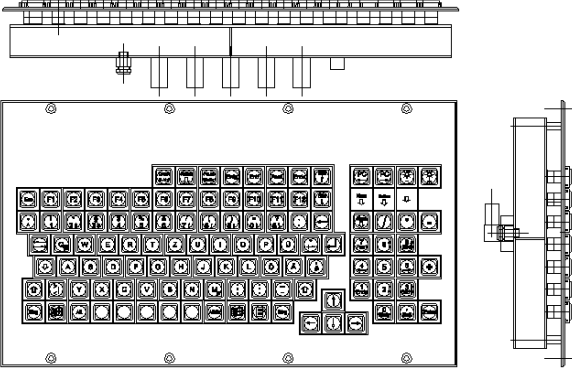
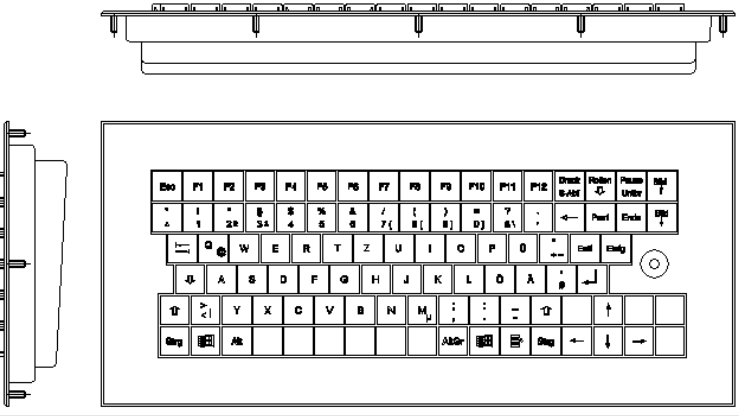
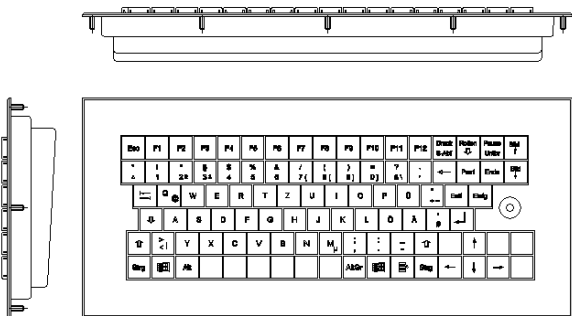
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
855	<p>IKL4W95LS-1</p> <p>Pulttastatur Aluminium eloxiert (BxHxT) ca. 330 x 256 x 43 mm modifiziertes WIN95 Layout LT4 Tasten Kappe mit Fingermulde Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub PS2 Tastatur PS2/RS232C Maus Datenblatt DNR 8844</p>	
857	<p>IKL4W95LS-2</p> <p>Industrie-Tastatur Aluminium eloxiert (BxHxT) ca. 330 x 256 x 43 mm modifiziertes WIN95 Layout beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub PS2 Tastatur PS2/RS232C Maus Datenblatt DNR 8859</p>	
854	<p>IKL4W95LS</p> <p>Pulttastatur Aluminiumgehäuse grün pulverbeschichtet (BxHxT) ca. 330 x 256 x 43 mm modifiziertes WIN95 Layout beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub PS2 Tastatur PS2/RS232C Maus Stromversorgung 24 V DC Datenblatt DNR 8842</p>	
837	<p>IKL4W95S 2xPS2</p> <p>Einbauleuchtastatur (BxHxT) ca. 384 x 225 x 65 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten LED-Beleuchtung, dimmbar Lebensdauer > 2 Millionen Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub Schnittstellen: 1 x PS2 Tastatur 1 x PS2 Maus 1 x Trackball mit Impulsausgang und Leuchttastern Datenblatt DNR 8775</p>	

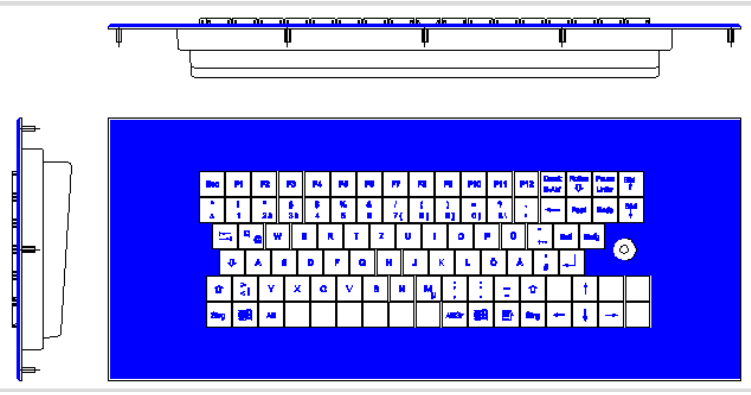
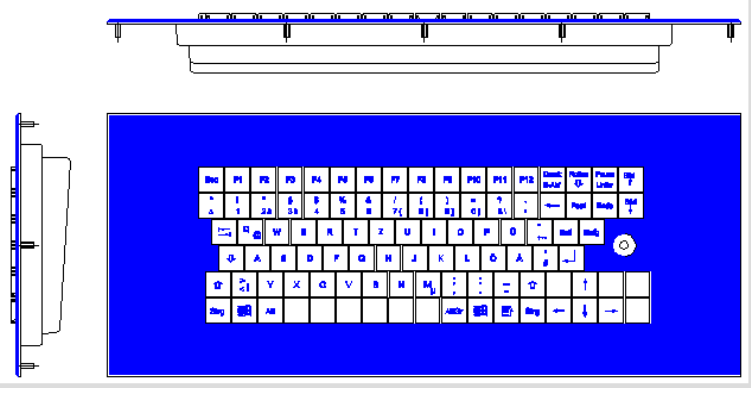

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
834	<p>IKL4W95S2 4xPS2 + Video</p> <p>Einbauleuchtastatur Frontplatte AIMg3 hart eloxiert (BxHxT) ca. 384 x 225 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 8755 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub 2x PS2 Tastatur 2x PS2 Maus alle Kanäle sind voll bootfähig 1x Trackball mit Impulsausgang + Leuchttastern 2xRGB IN, 1x RGB OUT Stromversorgung 24 V DC Datenblatt DNR 8759</p>	
835	<p>IKL4W95S3 4xPS2</p> <p>Einbauleuchtastatur (BxHxT) ca. 384 x 225 x 65 mm Tastenanordnung ähnlich WIN95 beleuchtete LT4 Tasten LED-Beleuchtung, dimmbar Lebensdauer > 2 Millionen Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub Schnittstellen: 2 x PS2 Tastatur 2 x PS2 Maus (TR103) 1 x Trackball mit Impulsausgang und Leuchttastern alle Kanäle sind voll bootfähig Datenblatt DNR 8763</p>	
741	<p>IKL4-W95SJE IP65 AT / RS232C German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al electrolytic oxidated (W x H x D) 390 x 176 x 36 mm 107 patented R&R-keys silicon switching pad lift 1,5 mm, actuation force 2 N lifetime > 2 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8019</p>	
740	<p>IKL4-W95SJE IP65 PS2 / PS2 German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al electrolytic oxidated (W x H x D) 390 x 176 x 36 mm 107 patented R&R-keys silicon switching pad lift 1,5 mm, actuation force 2 N lifetime > 2 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8019</p>	


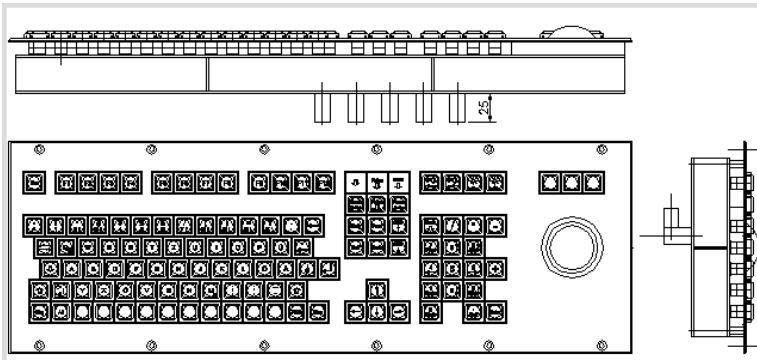
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
743	<p>IKL4-W95SJE-1 IP65 PS2 / PS2 German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al blue laquered RAL 5017 (W x H x D) 460 x 190 x 36 mm 107 patented R&R-keys silicon switching pad lift 1,5 mm, actuation force 2 N lifetime > 2 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8017</p>	
742	<p>IKL4-W95SJE-1 IP65 PS2 / PS2 German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al blue laquered RAL 5017 (W x H x D) 460 x 190 x 36 mm 107 patented R&R-keys silicon switching pad lift 1,5 mm, actuation force 2 N lifetime > 2 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8017</p>	
745	<p>IKL4W95T 4xPS2</p> <p>moutable keyboard front panel AlMg3 anodizedt (BxWxD) approx. 572 x 188,3 x 65 mm layout WIN95 drawing DNR 8148 illuminated LT4 keys (LED red) keycap for finger tips dimmable life time > 2 million strokes actuation force 2 N lift 1.5 mm 2 channel version 2 x PS2 keyboard 2 x PS2 mouse bootable trackball 75 mm, white power supply 24 V DC data sheet DNR 8024</p>	
1350	<p>IKL4W95T Einlegeschilder deutsch invers/schwarz DNR 7992</p>	

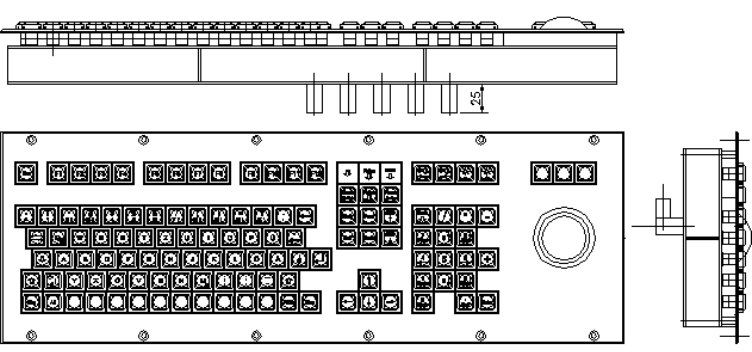
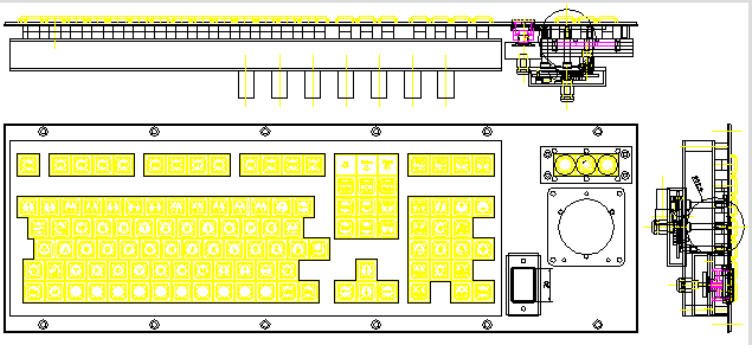
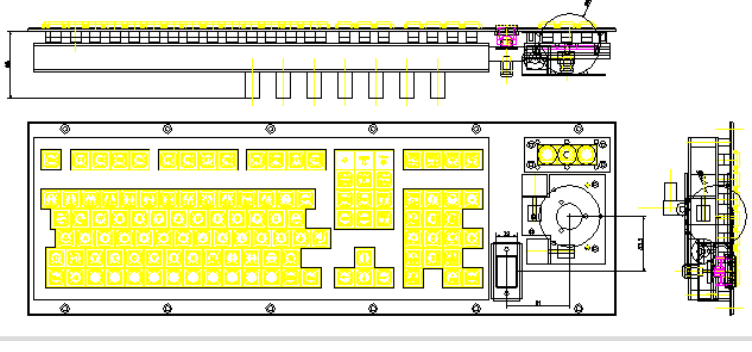
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1349	IKL4W95T Einlegeschilder USASCII invers/schwarz 118 Teile DNR 10761	
1666	IKL4W95T Tastensatz deutsch 1 bestehend aus: 118 Schaltmatten 1N 118 Adapter LT4 118 Tastenkappe LT4 FM Einlegeschildchen deutsch invers Layout DNR 7992	
786	IKL4W95T1 - Nightdesign - Einbau-Tastatur Front ALMG3, dunkel hart eloxiert (B x H X T) 554 x 188 x 70 mm Layout ähnlich WIN 95 R&RLeuchttasten LT4, LED rot oder gelb >2 Mio Schaltzyklen, Druckpunkt 2 N, Hub 1,5 mm Tastatur I P 6 5 : PC AToder PS2 Trackball I P 5 4: RS232C oder PS2 Maus kompatibel 2 x M12x1 Stecker für Tastatur + Trackball, 1 x Buchse für Stromversorgung Kugel-Durchmesser 50 mm, schwarz Stromversorgung 24 V DC f. Beleuchtung DNR 8358	
1644	IKL4W95T2 - 2xPS/2 Nightdesign - Einbau-Tastatur Front ALMG3, dunkel hart eloxiert (B x H X T) 554 x 188 x 70 mm Layout ähnlich WIN 95 R&RLeuchttasten LT4, LED rot >2 Mio Schaltzyklen, Druckpunkt 1 N, Hub 1,5 mm Tastatur I P 6 5 : PC AToder PS2 Trackball IP 6 5:PS2 Maus kompatibel 2 x M12x1 Stecker für Tastatur + Trackball, 1 x Buchse für Stromversorgung Kugel-Durchmesser 52 mm, schwarz Stromversorgung 24 V DC f. Beleuchtung DNR 8772	




R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
831	<p>IKL4W95T2 - 4xPS/2 Nightdesign -</p> <p>Einbau-Tastatur Front ALMG3, dunkel hart eloxiert (B x H x T) 554 x 188 x 70 mm Layout ähnlich WIN 95 R&RLeuchttasten LT4, LED rot >2 Mio Schaltzyklen, Druckpunkt 1 N, Hub 1,5 mm Tastatur I P 6 5 : PC AToder PS2 Trackball IP 6 5:PS2 Maus kompatibel 4 x M12x1 Stecker für Tastatur + Trackball, 1 x Buchse für Stromversorgung Kugel-Durchmesser 52.4 mm, schwarz Stromversorgung 24 V DC f. Beleuchtung DNR 8772</p>	
1218	<p>IKL4W95T3 4 x PS2</p> <p>mountable housing front panel AIMg3 anodized (BxHxT) ca. 572 x 188,3 x 65 mm layout WIN95 drawing DNR 10247 illuminated LT4 keys (LED red) key cap dimmable life time > 2E6 key strokes actuation force 1 N lift 1.5 mm 2 x PS2 keyboard 2 x PS2 mouse all chanel bootable tracball 52.5 mm power supply 24 V DC isolated (cable 2.5 m l) data sheet DNR 10276</p>	
1219	<p>IKL4W95T4-DE 4 x PS2</p> <p>Einbauleuchttastatur Frontplatte AIMg3 hart eloxiert (BxHxT) ca. 572 x 188,3 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 10290 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub 2 x PS2 Tastatur 2 x PS2 Maus alle Kanäle voll bootfähig umschaltbar zwischen 2 workstations Rollkugel 61,5 mm, schwarz Stromversorgung 24 V DC galvanisch getrennt DNR 10303</p>	



R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1641	<p>IKL4W95T4-DE 4 x PS2</p> <p>Einbaulechtastatur Frontplatte AIMg3 hart eloxiert (BxHxT) ca. 572 x 188,3 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 10290 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub 2 x PS2 Tastatur 2 x PS2 Maus alle Kanäle voll bootfähig umschaltbar zwischen 2 workstations Rollkugel 61,5 mm, weiß Stromversorgung 24 V DC galvanisch getrennt DNR 10303</p>	
1846	<p>IKL4W95T4-US 4xPS2 1N</p> <p>Einbaulechtastatur Frontplatte AIMg3 hart eloxiert (BxHxT) ca. 572 x 188,3 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 10290 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1 N 1.5 mm Hub 2 x PS2 Tastatur 2 x PS2 Maus alle Kanäle voll bootfähig umschaltbar zwischen 2 workstations Rollkugel 61,5 mm, weiß Stromversorgung 24 V DC DNR 10303</p>	
1355	<p>IKL4W95T4-US 4xPS2 2N</p> <p>Einbaulechtastatur Frontplatte AIMg3 hart eloxiert (BxHxT) ca. 572 x 188,3 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 10290 beleuchtete LT4 Tasten (LED rot) Kappe mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 2 N 1.5 mm Hub 2 x PS2 Tastatur 2 x PS2 Maus alle Kanäle voll bootfähig umschaltbar zwischen 2 workstations Rollkugel 61,5 mm, weiß Stromversorgung 24 V DC DNR 10303</p>	

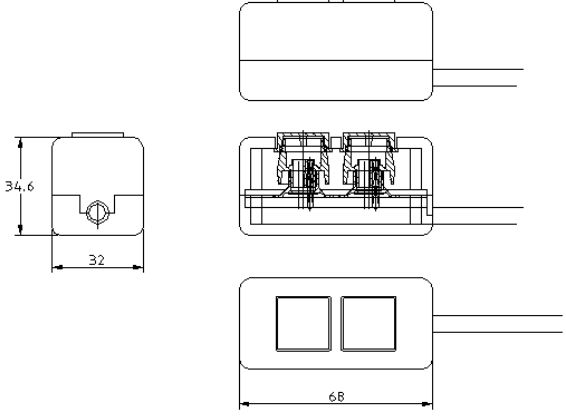
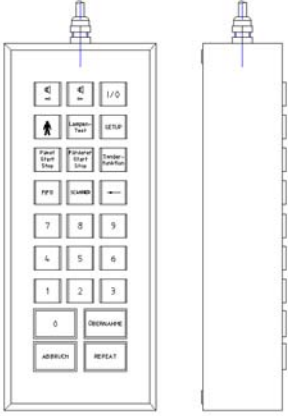
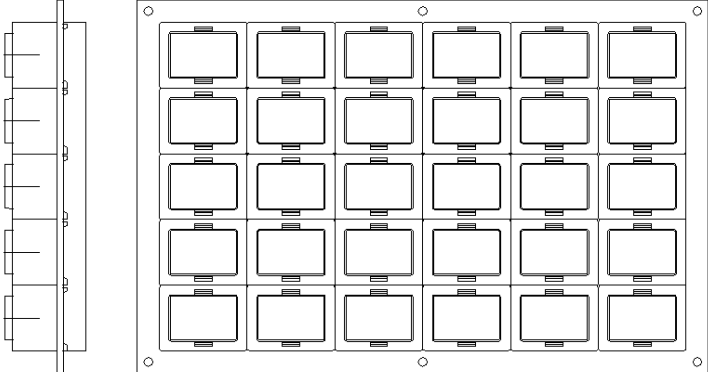
R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1444	<p>IKL4W95T6-DE</p> <p>Einbauleuchtastatur Frontplatte AIMg3 hart eloxiert (BxHxD) ca. 572 x 188,3 x 65 mm Tastenanordnung ähnlich WIN95 Layout bzw. Maßzeichnung siehe DNR 10290 beleuchtete LT4 Tasten (LED rot) Kappe farblos mit Fingermulde LED-Beleuchtung, dimmbar Lebensdauer > 2 Mio. Schaltzyklen Betätigungskraft 1 N 1.5 mm Hub 1 x PS2 Tastatur 1 x PS2 Maus Rollkugel 61,5 mm, weiß Stromversorgung 24 V DC galvanisch getrennt DNR 11219</p>	
1617	<p>IKL4W95T6-US 2 x PS2 isolated</p> <p>illuminate keyboard mountable case front plate AIMg3 anodized (WxHxD) approx. 572 x 188,3 x 65 mm layout similar to WIN95 layout details see drawing DNR 10290 illuminated single key LT4 (LED red) key cap with finger tip through dimmer with 128 steps 0% up to 100% life time > 2 Mio. strokes actuation force 1 N travel 1.5 mm interfaces: 1 x PS2 keyboard 1 x PS2 mouse ball diameter 61,5 mm, white power supply 24 V DC DNR 10303</p>	
1664	<p>IKL4W95T7 Montagesatz</p> <p>bestehend aus: Frontplatte IKL4W95T7 Halteplatte IKL4W95T7 Bodenwanne IKL4W95T7 Montageplätze für: Tastaturmodul IKL4W95 Trackball TR123-2 IKL4-3x1 (Trackballtasten) IKL4-1 zusätzliche linke Maustaste</p>	
1534	<p>IKLCD-W95 LCD Pulktastatur</p> <p>Gehäuse Aluminium eloxiert ca. 592 x 510 x 60 Layout ähnlich WIN95 mehrfarbige LCD-Tasten 1.5N Betätigungskraft 2 mm Hub Auflösung 32x24 Pixel Stromversorgung 24V DC Schnittstelle PS/2 Programmierschnittstelle RS232C 10-sprachig Datenblatt DNR 11612</p>	




R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1269	IKLM20x2 Dichtung DNR 5451 LANR 2640	
416	IKLM2x1 Industrial keyboard case plastic purewhite (L x W x H) appr. 68 x 32 x 35 mm 2 keys type LT2 key cap PC LED illumination protection class IP 5 4 data sheet DNR 6513	
192	IKLM404 RS232C R&R industrial keyboard case steel lacquered front and rear panel Al elox (W x H x D) 115 x 60 x 80 mm 25 illuminatable R&R keys type LT1 and LT2 16 keys with speech output loudspeaker and microfon built-in protection class IP 6 5 data sheet DNR 6175	
414	IKLM5x6 RS232C20 R&R illuminated keyboard plastic case case steel lacquered front and rear panel Al anodized- (W x H x D) appr. 260 x 170 x 40 mm 5x6 R&R keys type LT1 key caps PC red illumination LED red 1 LED out of 30 selectable 8-bit microcontroller with watchdog interface RS232C protection class IP 40, rear side open data sheet DNR 6473	

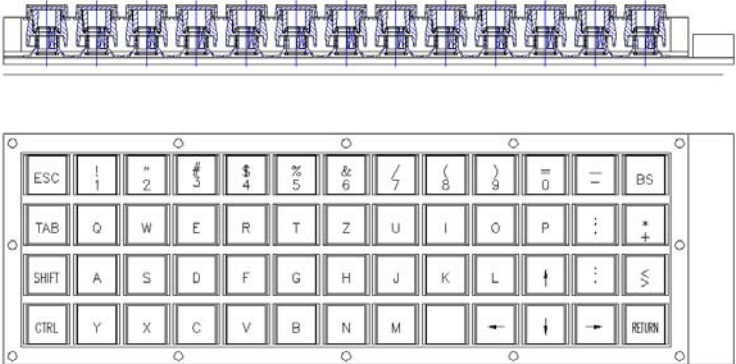
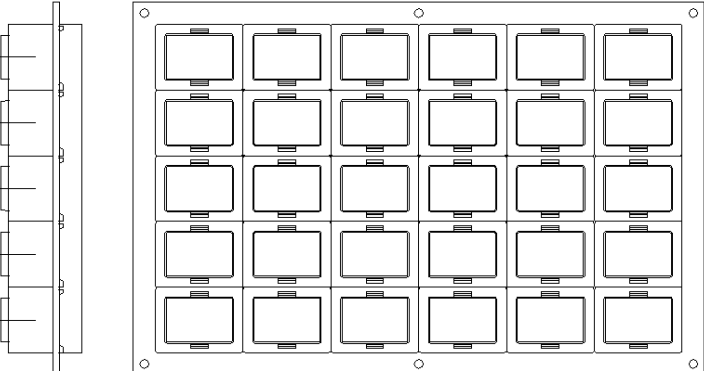


R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
21	<p>IKM12</p> <p>R&R industrial keyboard mount case (W x H x D) 86 x 110 x 42 mm 4 x 3 vandal-proof R&R metal keys MT2 lift 1.5 mm, actuation force 2 N matrix 2 x 6 diode decoupled miniature lamps T1 28V weight appr. 0.5 kg protection class IP 6 5 front side data sheet DNR 5958</p>	
23	<p>IKM-14x2B</p> <p>R&R mounting keyboard custom design (H x W x D) 466 x 132 x 42 mm vandal-proof R&R keys MT2 Zn-die-cast key caps 30 x 20 mm lift 1.5 mm, actuation force 2 N AT compatible, n-key-rollover watchdog, alarm system every 8 digital I/O service display weight appr. 1.8 kg protection class IP 6 5 data sheet DNR 5920</p>	
22	<p>IKM-20x2</p> <p>R&R mounting keyboard custom design (H x W x D) 506 x 132 x 42 mm vandal-proof R&R keys MT2 Zn-die-cast key caps 18 x 18 mm lift 1.5 mm, actuation force 2 N AT compatible, n-key-rollover watchdog, alarm system 8 digital INPUT 8 digital OUTPUT service display weight appr. 1.7 kg protection class IP 6 5 front side data sheet DNR 5921</p>	
210	<p>IKM-4x7 AT</p> <p>front panel V2A brushed case Al and PE black (W x H x D) appr. 200 x 150 x 35 mm vandal-proof R&R keys MT2 AT-controller with watchdog 3 m cable with AT plug 17 patented R&R keys key caps type MT2 18 x 18 mm Zn-die cast nickleed frame grid 23 mm switch pad DNR 5000 lift 1.5 mm, actuation force 2 N lifetime > 1 million actuations option: layout to customer specification max. 4x7 keys protection class IP 6 5 front side data sheet DNR 6597</p>	


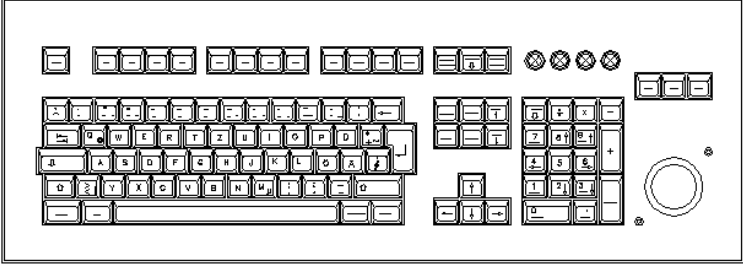


R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
197	<p>IKM-4x13 AT</p> <p>R&R industrial keyboard (W x H x D) appr. 322.4 x 102 25 mm 52vandal-proof R&R metal keys key caps type MT2 Zn die cast with Al in-laid signs engraved silicon switch pad DNR 5000 lift 1.5 mm, actuation force 2 N lifetime > 3 million actuations protection class IP 6 5 front side 3 m cable 5-pin diode plug data sheet DNR 6200</p>	
417	<p>IKM5x6 RS232C</p> <p>R&R industrial keyboard plastic case (W x H x D) appr. 260 x 170 x 40 mm 5x6 R&R keys type LT1 key caps Zn-die cast nickered 8-bit microcontroller with watchdog interface RS232C protection class IP 40 rear side open data sheet DNR 6516</p>	
63	<p>IKMF2-E AT</p> <p>R&R industrial mounting keyboard front panel AL elox (W x H x D) 500 x 200 x 26 mm 102 patented R&R keys lift 3 mm, actuation force 1 N 3 m cable protection class IP 65 all around data sheet DNR 3032</p>	
80	<p>IKMF2-EF AT</p> <p>R&R mounting keyboard custom design front panel Al elox (W x H x D) 500 x 200 x 26 mm 102 patented R&R keys lift 3 mm, actuation force 1 N cable 3 m protection class IP 6 5 front side rear side open data sheet DNR 5773</p>	




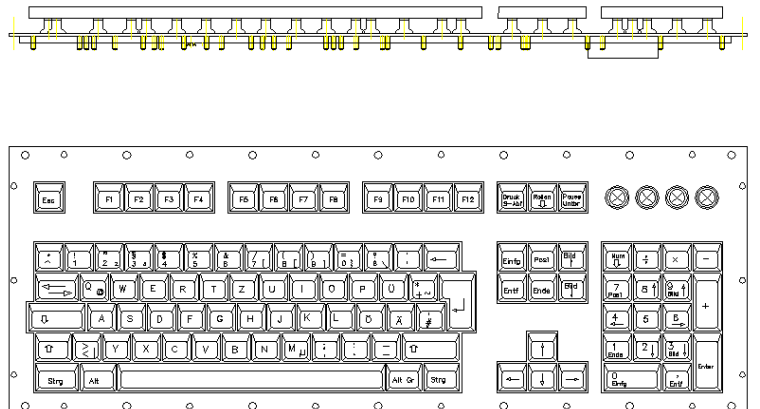
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
84	<p>IKMF2-EFJ AT and RS232C</p> <p>R&R-Industrial Mountable keyboard with integrated joystick patented sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m front side protection class IP 6 5 rear side open data sheet DNR 5933</p>	
83	<p>IKMF2-EFT AT/RS232C</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m front side IP 5 4 rear side open data sheet DNR 5932</p>	
546	<p>IKMF2-EJ AT/RS232C polished</p> <p>R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate aluminium electrolytically polished (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 5952</p>	
89	<p>IKMF2-EJ AT/RS232C</p> <p>R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 5952</p>	

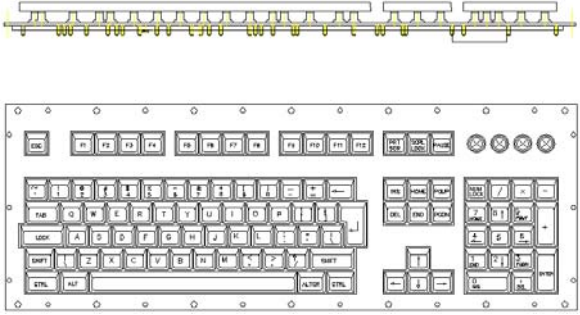


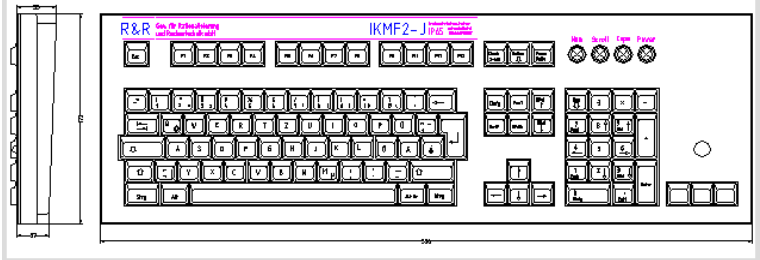
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
700	IKMF2-EJ PS2/PS2 polished hebrew R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate aluminium electrolytically polished (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 5952	
545	IKMF2-EJ PS2/PS2 polished R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate aluminium electrolytically polished (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 5952	
459	IKMF2-EJ PS2/PS2 R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 5952	
586	IKMF2-EL AT German R&R industrial mounting keyboard (W x H x D) 470 x 170 x 33 mm 102 patented R&R keys lift 3 mm, actuation force 1 N 3 m cable protection class IP 65 front panel data sheet DNR 7378	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
587	<p>IKMF2-EL AT USASCII</p> <p>&R industrial mounting keyboard (W x H x D) 470 x 170 x 33 mm 102 patented R&R keys lift 3 mm, actuation force 1 N 3 m cable protection class IP 65 front panel data sheet DNR 7378</p>	
568	<p>IKMF2-ET2 AT/RS232C</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball protected against humidity data sheet DNR 7210</p>	
637	<p>IKMF2-J AT/RS232C</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 536 x 172 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7584</p>	
638	<p>IKMF2-J PS2/PS2</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 536 x 172 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7584</p>	

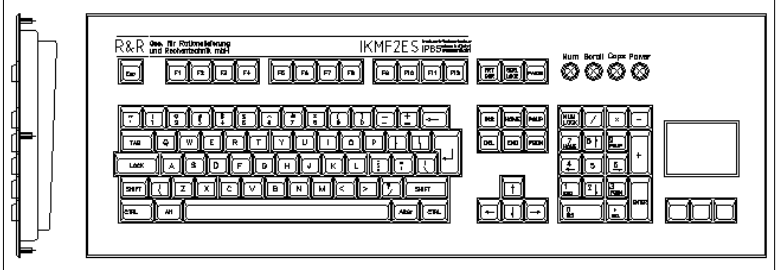
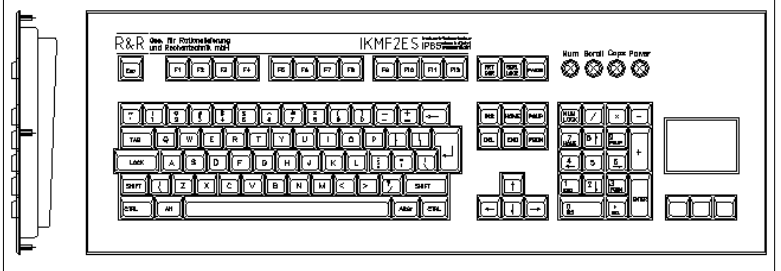
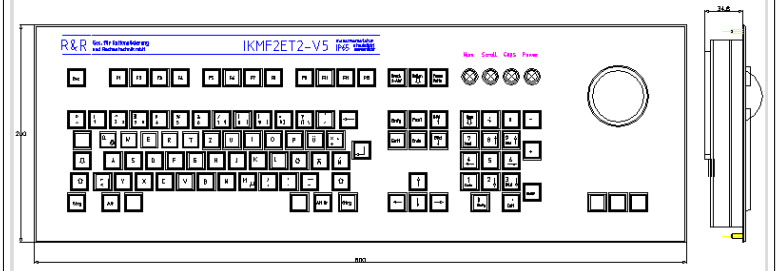
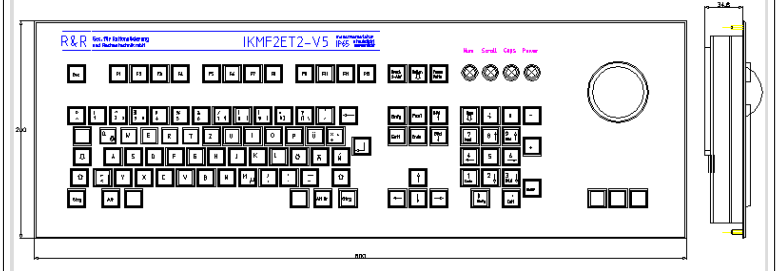
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
616	<p>IKMF2-E AT</p> <p>R&R industrial mounting keyboard front panel AL elox (W x H x D) 500 x 200 x 26 mm 102 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metall key caps V5 3 m cable protection class IP 65 all around data sheet DNR 7539</p>	
617	<p>IKMF2-E PS2</p> <p>R&R industrial mounting keyboard front panel AL elox (W x H x D) 500 x 200 x 26 mm 102 patented R&R keys lift 1.2 mm, actuation force 1.5 N vandal proof metall key caps V5 3 m cable protection class IP 65 all around data sheet DNR 7539</p>	
625	<p>IKMF2EJ-V5 AT/RS232C</p> <p>R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys vandal proof metal key caps V5 lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7535</p>	
626	<p>IKMF2EJ-V5 PS2 / PS2</p> <p>R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys vandal proof metal key caps V5 lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7535</p>	

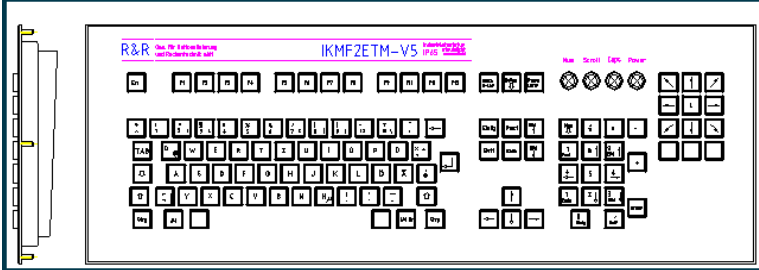
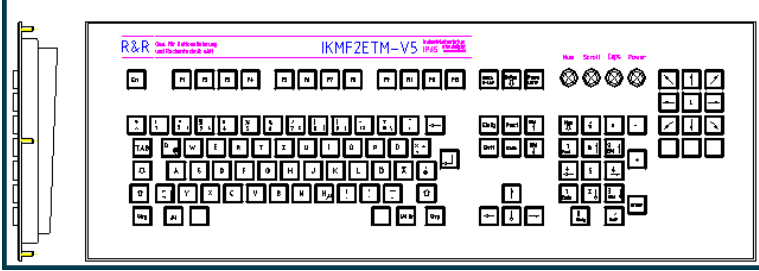


R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
832	<p>IKMF2ES polished</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around interface AT/RS232C option: Adapter plugs for PS2/PS2 data sheet DNR 8783</p>	
873	<p>IKMF2ES</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodized (W x H x D) 560 x 200 x 34 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around interface AT/ RS232C and PS/2 data sheet DNR 8783</p>	
615	<p>IKMF2ET2-V5 AT/RS232C</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N vandal-proof metall key caps V5 watchdog, cable 3 m keyboard IP65 Trackingball protected against humidity data sheet DNR 7210</p>	
618	<p>IKMF2ET2-V5 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N vandal-proof metall key caps V5 watchdog, cable 3 m protection class keyboard IP65 Trackingball protected against humidity data sheet DNR 7210</p>	




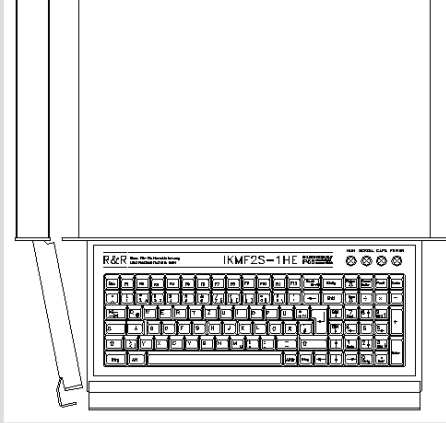
R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
620	<p>IKMF2ETM-V5 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated key mouse front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&R-keys lift 1.2 mm, actuation force 1.5 N vandal-proof metall key caps V5 watchdog, cable 3 m protection class IP65 - dust and water proofed data sheet DNR 7542</p>	
619	<p>IKMF2ETM-V5 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated key mouse front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&R-keys lift 1.2 mm, actuation force 1.5 N vandal-proof metall key caps watchdog, cable 3 m protection class IP65 - dust and water proofed data sheet DNR 7542</p>	
15	<p>IKMF2S AT -30° C to +80° C German</p> <p>R&R Industrial keyboard desktop case, Al sand cast lacquered (W x H x D) 391 x 155 x 30 mm 102 patented R&R-keys lift 3 mm, actuation force 1 N cable 3 m protection class IP 6 5 all around weight 1,8 kg data sheet DNR 4324</p>	
14	<p>IKMF2-S AT 0° C to +50° C German</p> <p>R&R Industrial keyboard desktop case, Al sand cast lacquered (W x H x D) 391 x 155 x 30 mm 102 patented R&R-keys lift 3 mm, actuation force 1 N wachtdog, cable 3 m protection class IP 6 5 all around weight 1,8 kg data sheet DNR 4324;</p>	

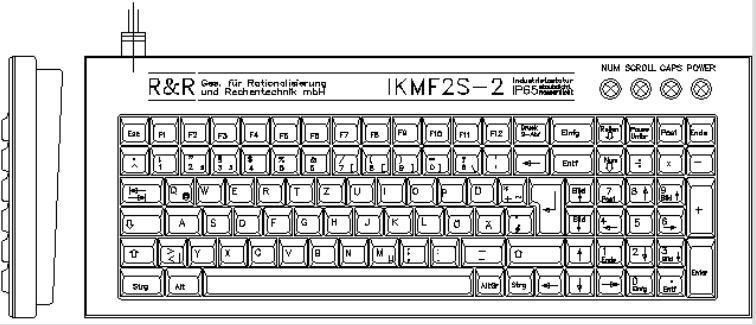
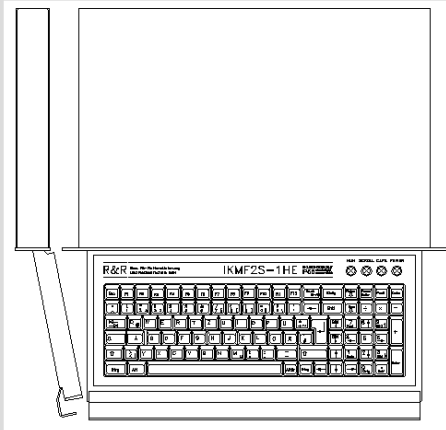
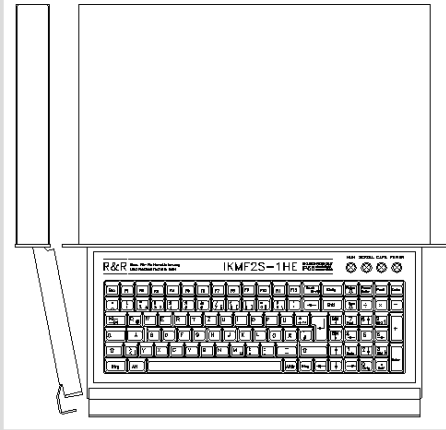
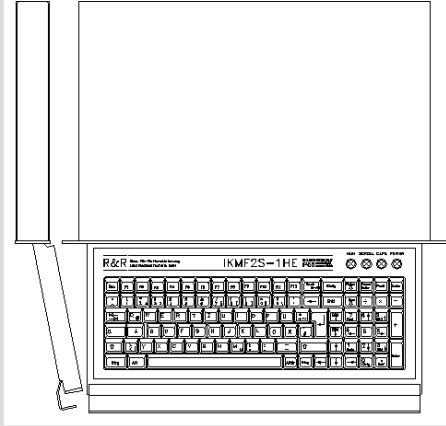
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
547	<p>IKMF2S AT 0° C to +50° C USASCII</p> <p>R&R Industrial keyboard desktop case, Al sand cast lacquered (W x H x D) 391 x 155 x 30 mm 102 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around weight 1,8 kg data sheet DNR 4324</p>	
1639	<p>IKMF2-S PS/2 0° C to +50° C french</p> <p>R&R Industrial keyboard desktop case, Al sand cast lacquered (W x H x D) 391 x 155 x 30 mm 102 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around weight 1,8 kg data sheet DNR 4324</p>	
1443	<p>IKMF2-S PS/2 0° C to +50° C German</p> <p>R&R Industrial keyboard desktop case, Al sand cast lacquered (W x H x D) 391 x 155 x 30 mm 102 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around weight 1,8 kg data sheet DNR 4324</p>	
744	<p>IKMF2S-1HE PS2</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr. 11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 7651</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
882	<p>IKMF2S-2 PS2 0° C to +50° C german</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 420 x 164 x 33 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 9085</p>	
884	<p>IKMF2S-2HE PS2</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 88 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 9128</p>	
887	<p>IKMF2S-2HE PS2 German</p> <p>R&R industrial keyboard 19"-2HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 88 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around key-system integrated data sheet DNR 7651</p>	
926	<p>IKMF2S-2HE PS2 French</p> <p>R&R industrial keyboard 19"-2HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 88 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around key-system integrated data sheet DNR 9128</p>	

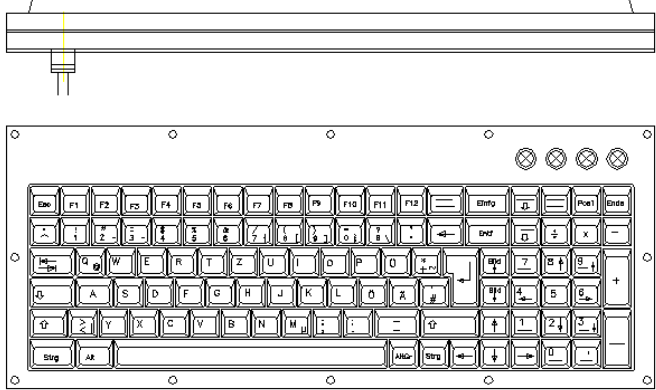
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1180	<p>IKMF2S-4 PS2/PS2 RS232C</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodized (W x H x D) 400 x 234 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around mousepad data sheet DNR 10215</p>	
827	<p>IKMF2S-4HE AT 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 483 x 177 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 6068</p>	
164	<p>IKMF2S-4HE AT 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 483 x 177 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 6068</p>	
1464	<p>IKMF2S-4HE PS/2 0° C to +60° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 483 x 177 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 6068</p>	

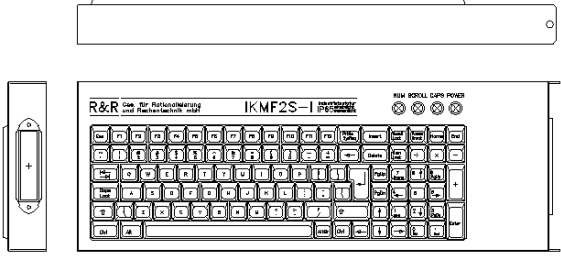
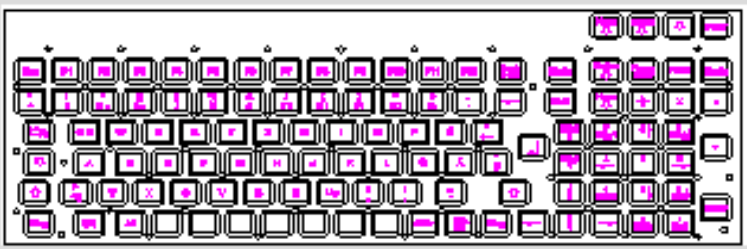


R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1448	<p>IKMF2S-5 PS2/PS2 RS232C</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 470 x 170 x 32 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around mousepad data sheet DNR 10215</p>	
33	<p>IKMF2S-E AT 0° C to +50° C</p> <p>R&R Industrial keyboard case Al and PE black (W x H x D) 404 x 164 x 24 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 5942</p>	
778	<p>IKMF2S-E2 AT 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 530 x 185 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 8259</p>	
787	<p>IKMF2S-E2 PS2 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 530 x 185 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 8259</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1432	<p>IKMF2S-I</p> <p>R&R Industrial desktop keyboard with infrared interface housing aluminium anodized (W x H x D) 481 x 170 x 45 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 data sheet DNR 11156</p>	
1043	<p>IKMF2S-S Silikon-Tastatur</p> <p>Einbaokit bestehend aus Leiterplatte + Silikon-Schaltmatte PS2 - Schnittstelle 114 Tasten 383,5 x 146,6 x 40 mm Grundfarbe weiß Beschriftung blau bedruckt Betätigungskraft 1.2 N Hub 1.5 mm Datenblatt DNR 9887</p>	
1372	<p>IKMF2S-S1HE-S PS2 with lock</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 7651</p>	
1338	<p>IKMF2S-S-1HE PS2</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 7651</p>	

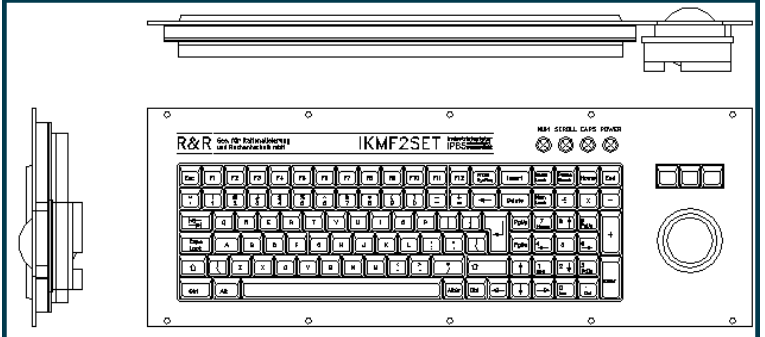

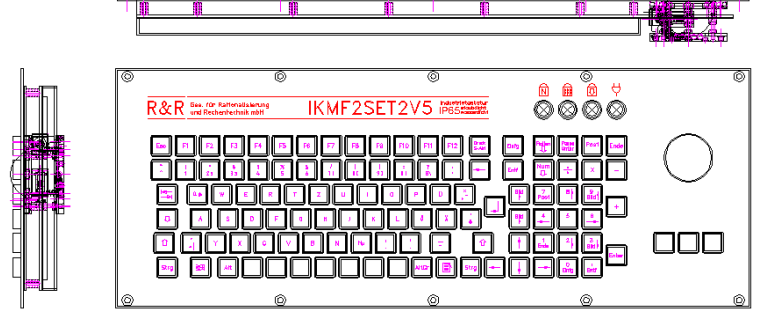

R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1370	<p>IKMF2S-S-1HE-S PS2 with lock</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr. 11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 7651</p>	
1025	<p>IKMF2SE-K PS2</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 410 x 170 x 15 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N watchdog, cable 3 m front plate protection class IP 5 4 data sheet DNR 9765</p>	
196	<p>IKMF2SEJ AT / PS2 oil proofed</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 472 x 164 x 30 mm 105 patented R&R-keys sealed silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6077</p>	
172	<p>IKMF2SEJ AT / RS232C</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 472 x 164 x 30 mm 105 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6077</p>	




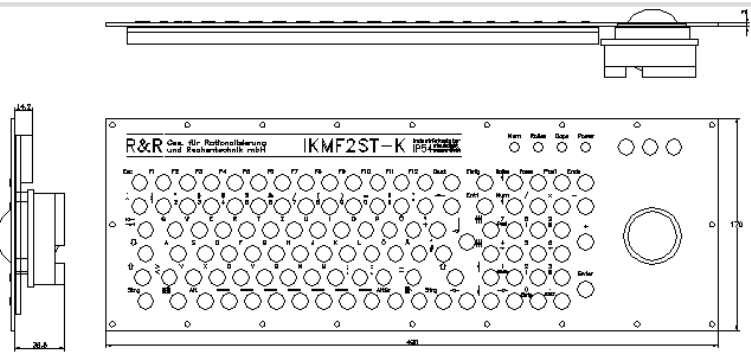
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
795	<p>IKMF2SET PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al anodized (W x H x D) 514 x 185 x 39,5 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 ball diameter 2" data sheet DNR 8448</p>	
1294	<p>IKMF2SET2 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al anodized (W x H x D) 500 x 185 x 39,5 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 ball diameter 38 mm data sheet DNR 10575</p>	
1734	<p>IKMF2SET2-V5 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al anodized (W x H x D) 500 x 185 x 39,5 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 ball diameter 38 mm data sheet DNR 12790</p>	
1447	<p>IKMF2SK AT</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 410 x 170 x 20 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N interface ps2, watchdog protection class IP 6 5 data sheet DNR 10020</p>	


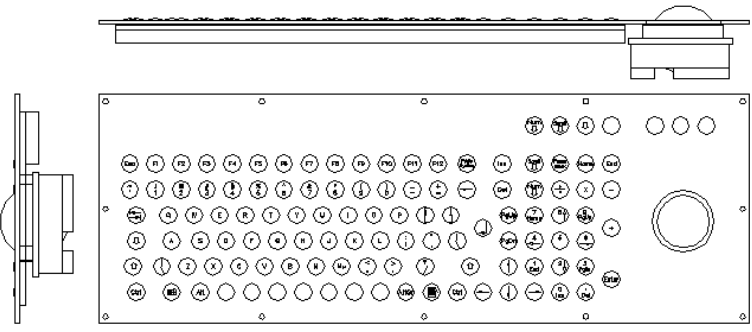
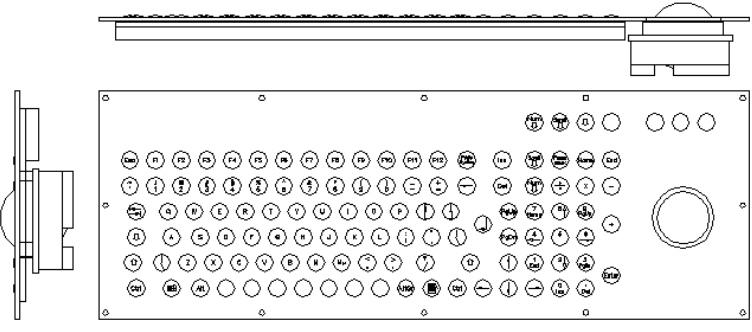

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1044	<p>IKMF2S K IR PS2</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 410 x 170 x 30 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N interface infrared / ps2, watchdog protection class IP 6 5 data sheet DNR 9890</p>	
1058	<p>IKMF2SK PS2</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 410 x 170 x 20 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N interface ps2, watchdog protection class IP 6 5 data sheet DNR 10020</p>	
1213	<p>IKMF2SK-2 PS2 with touchpad</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 400 x 234 x 20 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N interface ps2, watchdog protection class IP 6 5 data sheet DNR 10246</p>	
856	<p>IKMF2SK-T PS2/PS2</p> <p>R&R Industrial keyboard trackball ball diameter 50,8 mm Seal material PTFE front plate Al black anodised (W x H x D) 470 x 170 x 40 mm 116 silicon R&R-keys lift 1.5 mm, actuation force 1 N watchdog, cable 3 m front plate protection class IP 5 4 data sheet DNR 8850</p>	

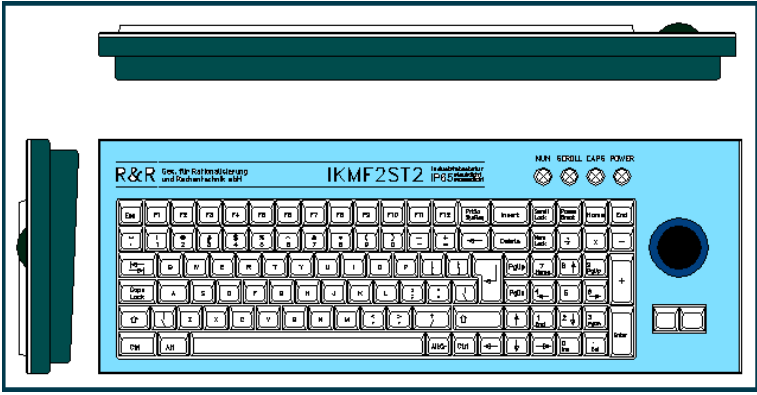
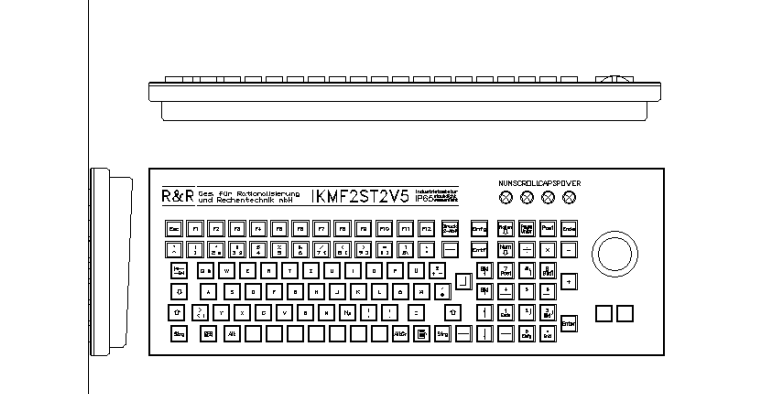
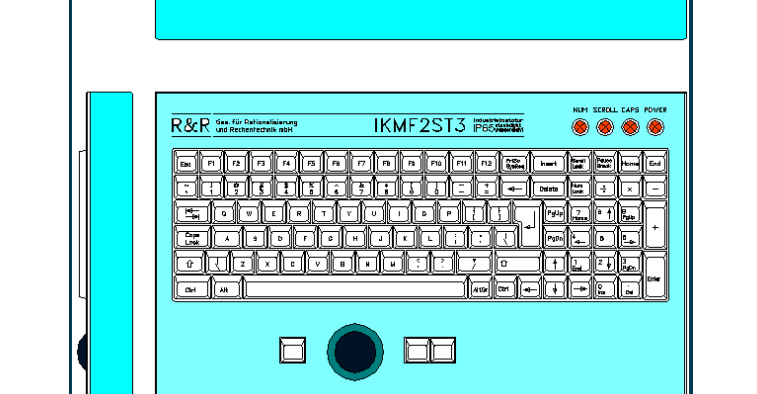

R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1045	<p>IKMF2S K F PS2</p> <p>R&R Industrial keyboard front plate Al anodised (W x H x D) 420 x 164 x 32 mm 113 silicon R&R-keys lift 1.5 mm, actuation force 1 N radio / ps2 interface protection class IP 6 5 data sheet DNR 9894</p>	
864	<p>IKMF2SK2-T PS2/PS2</p> <p>R&R Industrial keyboard trackball ball diameter 50,8 mm Seal material PTFE front plate Al black anodised (W x H x D) 482,6 x 170 x 40 mm 116 silicon R&R-keys lift 1.5 mm, actuation force 1 N watchdog, cable 3 m front plate protection class IP 5 4 data sheet DNR 8887</p>	
1505	<p>IKMF2SK2-T PS2/PS2</p> <p>R&R Industrial keyboard trackball ball diameter 50,8 mm Seal material PTFE front plate Al black anodised (W x H x D) 482,6 x 170 x 40 mm 116 silicon R&R-keys lift 1.5 mm, actuation force 1 N watchdog, cable 3 m front plate protection class IP 5 4 data sheet DNR 8887</p>	
1028	<p>IKMF2ST-2HE PS2</p> <p>R&R industrial drawer keyboard 19"-1HE rack mount drawer appr. 11° tiltable front panel Al anodized (W x H x D) 483 x 88 x 400 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around trackball 38 mm actuation force 0.5 N PS/2 interface data sheet DNR 9770</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
879	<p>IKMF2ST2 PS2/PS2</p> <p>R&R Industrial desktop keyboard with integrated tracking ball front plate Al anodized (W x H x D) 467 x 170 x 45 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 ball diameter 38 mm data sheet DNR 8967</p>	
1390	<p>IKMF2ST2 V5 PS2/PS2</p> <p>R&R Industrial desktop keyboard with integrated tracking ball front plate Al anodized (W x H x D) 467 x 170 x 45 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP65 ball diameter 38 mm data sheet DNR 10921</p>	
880	<p>IKMF2ST3 PS2/PS2</p> <p>R&R Industrial desktop keyboard with integrated tracking ball front plate Al anodized (W x H x D) 404 x 234 x 45 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 ball diameter 38 mm data sheet DNR 9009</p>	
851	<p>IKMF2STV5 PS2/PS2</p> <p>R&R Industrial keyboard trackball ball diameter 50,8 mm front plate Al black anodized (W x H x D) 470 x 172 x 51 mm 116 patented R&R-keys metall key cap V5 inlays Al black anodized inscription engraved lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8817</p>	

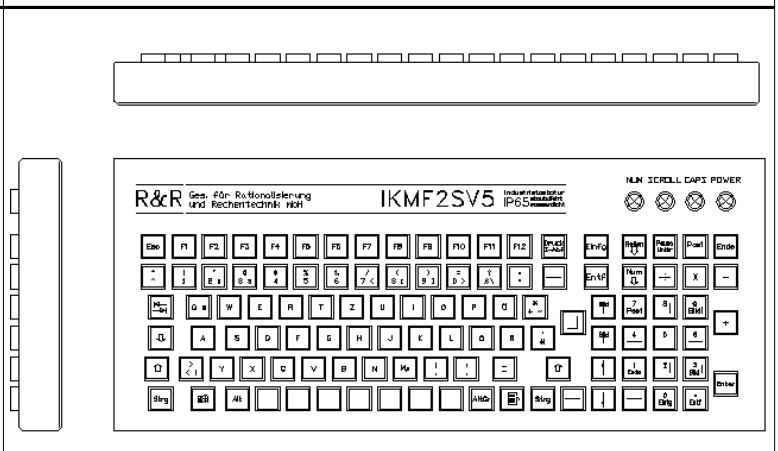
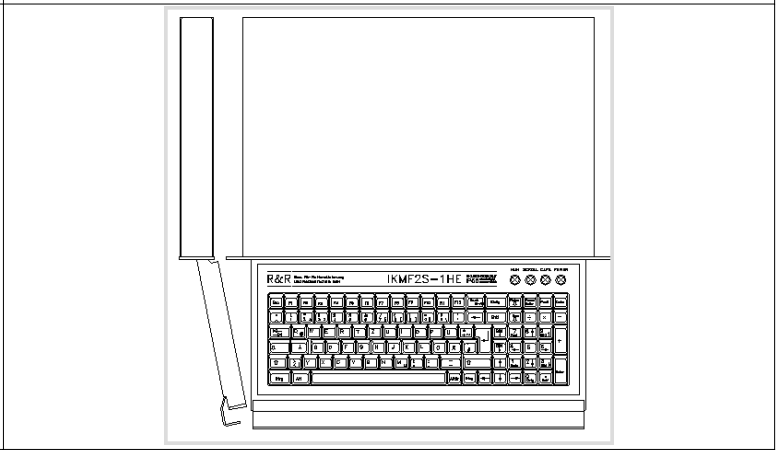
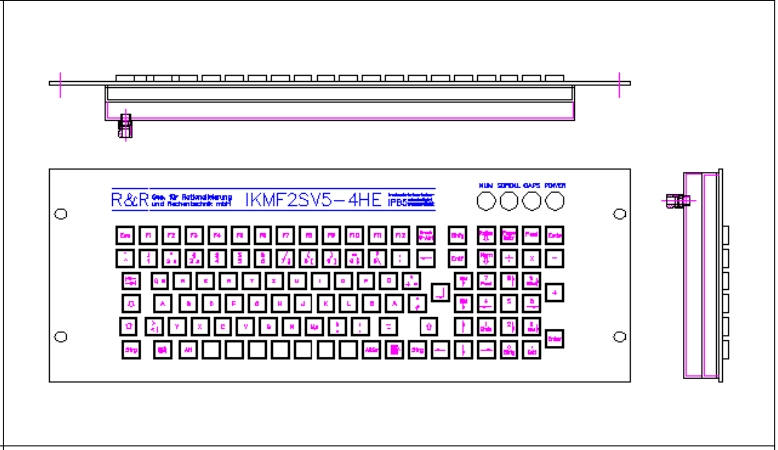

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1692	<p>IKMF2STV5-2HE PS2</p> <p>R&R industrial drawer keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 88 x 400 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N PS/2 compatible watchdog protection class IP 6 5 all around trackball 38 mm actuation force 0.5 N PS/2 interface data sheet DNR 12411</p>	
1682	<p>IKMF2STV6 radio keyboard</p> <p>trackball stainless steel 38.1 mm housing stainless steel (W x H x D) 500 x 230 x 45 mm 116 patented R&R-keys metall key cap V6 inlays stainless steel inscription engraved lift 1.2 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around Keyboard with external keyboard 1x external mouse receiver with external mouse and keyboard frequency 2.4 MHz data sheet DNR 12347</p>	
1691	<p>IKMF2STV6-1 radio keyboard</p> <p>trackball stainless steel 38.1 mm housing stainless steel (W x H x D) 500 x 230 x 45 mm 116 patented R&R-keys metall key cap V6 inlays stainless steel inscription engraved lift 1.2 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around receiver with 1x external keyboard 1x external mouse Frequency 2.4 GmbH data sheet DNR 12347</p>	
1539	<p>IKMF2SV5 german PS/2 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 406 x 170 x 32 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 11645</p>	

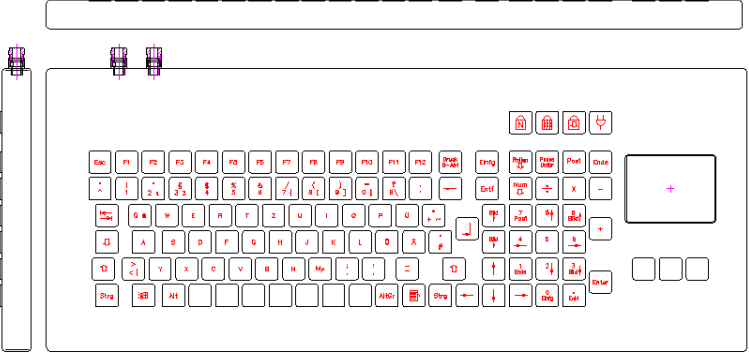
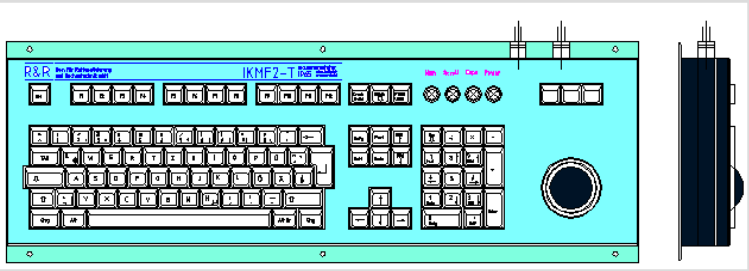
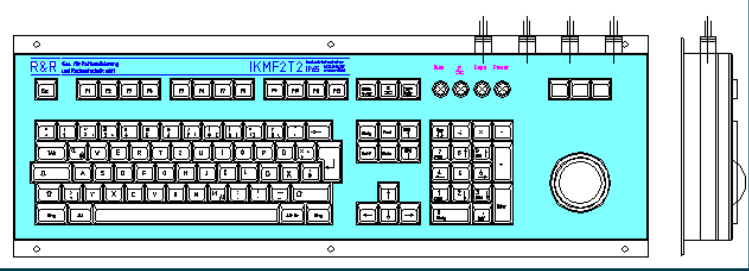

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1640	<p>IKMF2SV5 french PS/2 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 406 x 170 x 32 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 11645</p>	
1710	<p>IKMF2SV5-1HEPS2</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 310 mm MF2-layout 102 keys lift 3 mm, actuation force 1 N AT compatible watchdog protection class IP 6 5 all around data sheet DNR 7651</p>	
1375	<p>IKMF2S-4HE Ps/2 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Al anodized (W x H x D) 483 x 177 x 26 mm watchdog 102 patented R&R-keys lift 3 mm actuation force 1 N 3 m cable protection class IP 6 5 all around data sheet DNR 6068</p>	
1719	<p>IKMF2SV5-S1HE PS2</p> <p>R&R industrial keyboard 19"-1HE rack mount drawer appr.11° tiltable front panel Al anodized (W x H x D) 483 x 44 x 330 mm W95-layout 102 metal keys V5 lift 1.2 mm, actuation force 1.5 N PS/2 compatible watchdog protection class IP 6 5 all around data sheet DNR 12697</p>	





R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1750	<p>IKMF2SV7-S PS2/PS2</p> <p>R&R Industrial keyboard with integrated touchpad housing aluminium anodized (W x H x D) 500 x 202 x 21 mm 118 patented R&R metal-keys V7 silicon key DNR 8888 lift 1.5 mm, actuation force 1 N lifetime > 1 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet DNR 12985</p>	
673	<p>IKMF2T PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 580 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackball IP54 data sheet DNR 7737</p>	
672	<p>IKMF2T2 2x PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated trackball front plate Al elox (W x H x D) 580 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 trackball IP54 data sheet DNR 7738</p>	
1566	<p>IKS102 PS2/PS2</p> <p>R&R Internet-Tastatur mit integriertem kapazitiven Maus Einbaugehäuse Frontplatte Einscheibensicherheitsglas, Gehäuse Aluminium natur eloxiert (B x H x T) ca. 334 x 140 x 31 mm 64 kapazitive Tasten Kabel 3 m Schutzart IP 6 5 rundum kapazitives Maus PS/2 Schnittstelle 3m Kabel Datenblatt DNR 12112</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1623	<p>IKS103 PS2/PS2</p> <p>R&R Internet-Tastatur Einbaugehäuse Frontplatte Einscheibensicherheitsglas, Gehäuse Aluminium natur eloxiert (B x H x T) ca. 334 x 148 x 31 mm 64 kapazitive Tasten Kabel 3 m Schutzart IP 6 5 rundum Datenblatt DNR 12185</p>	
1764	<p>IKS105 PS2/PS2</p> <p>R&R Internet-Tastatur mit integriertem kapazitiven Maus Einbaugehäuse Klemmmontage Frontplatte Einscheibensicherheitsglas, Gehäuse Aluminium natur eloxiert Druck im Silberdesign (B x H x T) ca. 334 x 140 x 31 mm 64 kapazitive Tasten Kabel 3 m Schutzart IP 6 5 rundum kapazitives Maus PS/2 Schnittstelle 3m Kabel ähnlich Datenblatt DNR 12112</p>	
1765	<p>IKS105 LED PS2/PS2</p> <p>R&R Internet-Tastatur mit integriertem kapazitiven Maus Einbaugehäuse Klemmmontage Frontplatte Einscheibensicherheitsglas, Gehäuse Aluminium natur eloxiert Druck im Silberdesign (B x H x T) ca. 334 x 140 x 31 mm ????</p> <p>64 kapazitive Tasten Kabel 3 m Schutzart IP 6 5 rundum kapazitives Maus PS/2 Schnittstelle 3m Kabel ähnlich Datenblatt DNR 12112</p>	
42	<p>IKSPS-2x15</p> <p>R&R Industrial keyboard mounting version front plate Al anodized (W x H x D) 339 x 117 x 29 mm 2 x 15 patented R&R-keys one pin for each key switching power 30 V / 10 mA 2-row 40-pin plug lift 3 mm, actuation force 1 N front side protection class IP 6 5 data sheet DNR 5778</p>	

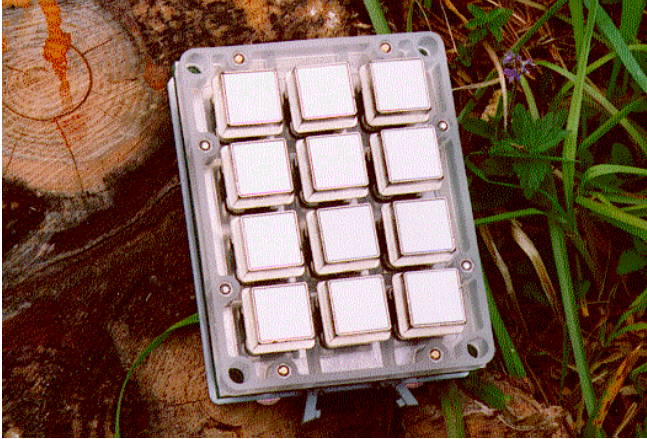
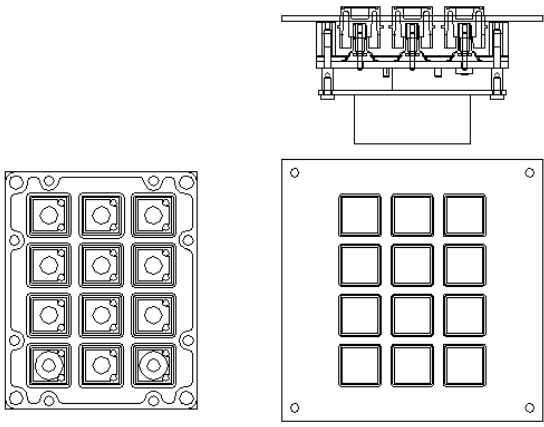


R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de



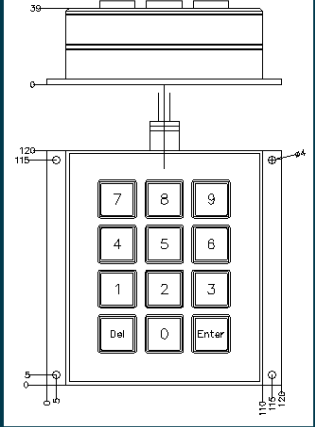

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
154	<p>IKSPS1</p> <p>R&R Industrial keyboard mounting version front plate elox (W x H x D) 155 x 230 x 30 mm 26 patented R&R keys lift 3 mm, actuation force 1 N switching power 30 V / 10 mA every contact laid out to the outside 2-row 40-pin socket front side protection class IP 6 5 data sheet DNR 4048</p>	
72	<p>IKTEC2000</p> <p>R&R foil keyboard 4-color printed polyester foil 15 short lift keys AT-compatible watchdog front side IP 6 5 rear side open incl. 3 m cable smooth data sheet DNR 5904</p>	
139	<p>IKV-4x4</p> <p>R&R Industrial keyboard mounting version lettering engraved front plate Al elox (W x H x D) 115 x 115 x 30 mm 4 x 4 patented R&R-keys brass-key caps Typ V lift 3 mm, actuation force 1 N connection matrix 2-row 8-pin plug front side protection class IP 6 5 data sheet DNR 4357</p>	
159	<p>IKV-INFO AT</p> <p>R&R Industrial keyboard mounting version front plate Al elox lettering engraved (W x H x D) 190 x 213 x 30 mm max. 5 x 7 patented R&R-keys brass-key caps Typ V 3 mm lift, actuation force 1 N 5-pin diode plug cable 3 m protection class IP 6 5 all around data sheet DNR 4033</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de


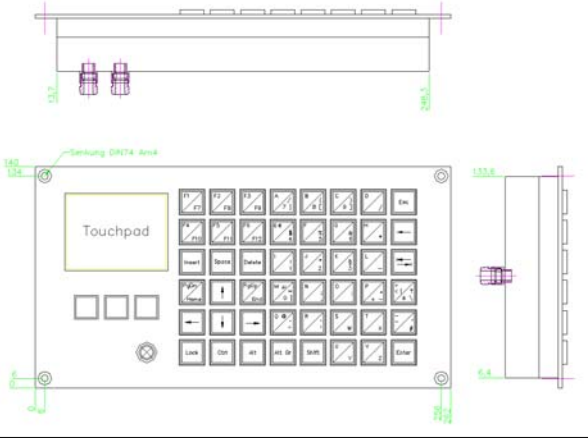
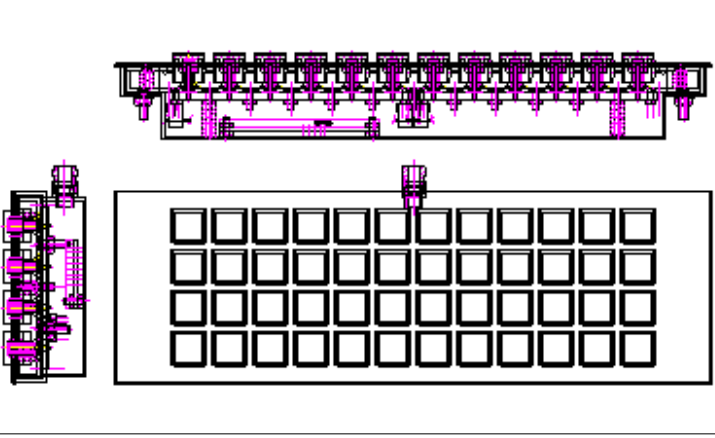
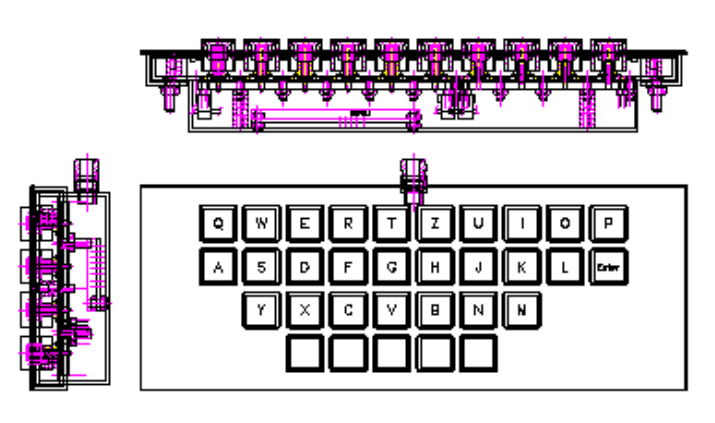
Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
20	<p>IKV3-12B</p> <p>R&R Industrial keyboard mounting version Al / PE (W x H x D) 86 x 110 x 42 mm 4 x 3 vandal-proof R&R-keys key cap Typ V3 18 x 18 mm Zn die cast drum-nickelized lift 1,5 mm, actuation force 1,5 N matrix 2 x 6 diode separated front side protection class IP 6 5 data sheet DNR 5957</p>	
444	<p>IKV3-12C</p> <p>R&R Industrial keyboard front plate V4A (W x H x D) 120 x 120 x appr. 60 mm 4 x 3 vandal-proof R&R-keys key cap Typ V3 18 x 18 mm Zn die cast drum-nickelized lift 3 mm, actuation force 1 N power supply 230 V AC relay output 1 x double-throw contact code keyboard front side protection class IP 6 5 data sheet DNR 6678</p>	
704	<p>IKV3-12D 20 mA</p> <p>R&R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N matrix diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin Molex plug data sheet DNR 6849</p>	
479	<p>IKV3-12D AT</p> <p>R&R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N AT-interface diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin diode plug data sheet DNR 6849</p>	

Art.-Nr.	Bezeichnung	Bild
995	<p>IKV3-12D RS232C</p> <p>R&R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N AT-interface diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 9 pin SUB-D plug data sheet DNR 6849</p>	
651	<p>IKV3-12E</p> <p>R&R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N matrix interface 2 x 6 with diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 10 pin plug data sheet DNR 7621</p>	
706	<p>IKV3-12F RS485</p> <p>R&R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N RS485-interface matrix diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin diode plug data sheet DNR 7911</p>	
797	<p>IKV5-1 Industrietaster</p> <p>Tischgehäuse Frontplatte Aluminium eloxiert (B x H x T) 80 x 80 x 27,5 mm (ohne) Kabelausgang patentierte R&R Taste, 3 mm Hub, 3 N Betätigungskraft deutlicher Druckpunkt, Lebensdauer > 3 Millionen Hübe Kontakt- und Führungselemente im gedichteten Raum Metall-Tastenkappe V5, Beschriftung graviert Schutzart IP 6 5 (Schutz gegen Staub und Strahlwasser) Betriebstemperatur -30°C bis +80 Datenblatt DNR 8461</p>	

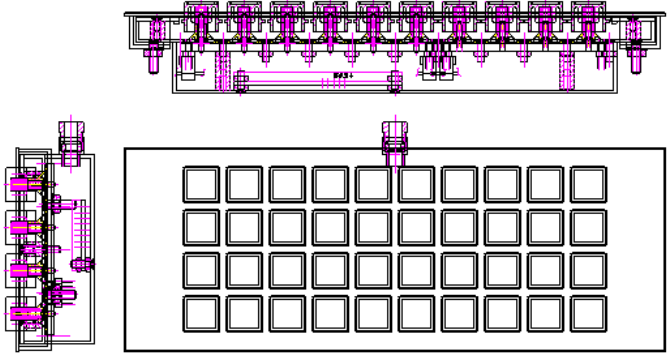


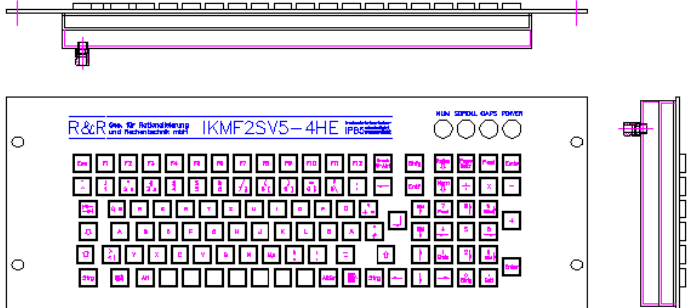
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1092	<p>IKV5-339-1 Metalltastatur mit Display</p> <p>Frontplatte Aluminium, natur eloxiert (B x H x T) 440 x 160 x 40 mm LCD 2x16 8 mm mit LED Hintergrundbeleuchtung Schüsselschalter 76 Metalltasten V5 Betätigungskraft 3 N Datenblatt DNR 10134</p>	
1694	<p>IKV5-339-2 Metalltastatur mit Touchpad</p> <p>Frontplatte Aluminium, natur eloxiert (B x H x T) 262 x 140 x 40 mm 48 Metalltasten V5 Betätigungskraft 1.5 N Datenblatt DNR 12415</p>	
1742	<p>IKV5-339-3 Metalltastatur</p> <p>Frontplatte Aluminium, natur eloxiert (B x H x T) 278 x 90 x 34 mm 48 Metalltasten V5 Betätigungskraft 1.5 N, Hub 1.2mm Datenblatt DNR 12810</p>	
1744	<p>IKV5-339-4 Layout 1 Metalltastatur</p> <p>Frontplatte Aluminium, natur eloxiert (B x H x T) 240 x 90 x 34 mm 32 Metalltasten V5 Betätigungskraft 1.5 N, Hub 1.2mm Schnittstelle PS/2 Datenblatt DNR 12821</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1743	<p>IKV5-339-4 Metalltastatur</p> <p>Frontplatte Aluminium, natur eloxiert (B x H x T) 240 x 90 x 34 mm 40 Metalltasten V5 Betätigungskraft 1.5 N, Hub 1.2mm Datenblatt DNR 12821</p>	
1619	<p>IKV5-811-1</p> <p>R&R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 119 x 119 x 30 mm 16 patented R&R metall keys V5 key travel 1.2 mm, actuation force 1.5 N lifetime > 3 million cycles front side IP 6 5 10 clamps binary coded + strobe / 24 V data sheet DNR 11701</p>	
1620	<p>IKV5-811-2</p> <p>R&R industrial keyboard plastic case light grey RAL 7035 (W x H x D) 120 x 122 x 55 mm 16 patented R&R metall keys V5 key travel 1.2 mm, actuation force 1.5 N lifetime > 3 million cycles front side IP 6 5 10 clamps binary coded + strobe / 24 V data sheet DNR 12097</p>	
1531	<p>IKV5-MF2S-4HE AT 0° C to +50° C</p> <p>R&R Industrial keyboard front plate Aluminium anodized (W x H x D) 483 x 177 x 26 mm watchdog 102 patented R&R-metal-keys V5 lift 1.2 mm actuation force 1.5 N 3 m cable protection class IP 6 5 all around data sheet DNR 11591</p>	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
919	<p>IKV6-107 Einbau-Metall-Tastatur mit Sichtscheibe Aluminium schwarz eloxiert (H x B x T in mm) 171 x 92 x 30 4x4 Metalltastenkappen 16 x 16 mm, Typ V6 graviert Schnittstelle Matrix, Anschlüsse auf einen Pol herausgeführt Schaltleistung max. 30 V/10 mA Lebensdauer >3 Mio. Schaltzyklen Hub-,Schalt- u. Dichtelement Silikonelastomere Hub 1,5 mm, Druckpunkt 2 N</p>	
867	<p>IKV6-318 PS2 R&R Industrial keyboard front plate stainless steel (W x H x D) 328 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet DNR 8907</p>	
1001	<p>IKV6-318-1 PS2 R&R Industrial keyboard front plate Al anodized (W x H x D) 328 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V6 Aluminium blue anodized inscription engraved silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet DNR 9632</p>	
869	<p>IKV6-318-J PS2/PS2 R&R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 protection class IP 54 data sheet DNR 8931</p>	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
868	<p>IKV6-318-T PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 8908</p>	
1359	<p>IKV6-318-T USB/USB</p> <p>R&R Industrial keyboard with integrated stainless steel 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 8908</p>	
1263	<p>IKV6-318-T2 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 layout DNR 10399 data sheet DNR 8908</p>	
1304	<p>IKV6-318-T2 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 layout DNR 10399 data sheet DNR 8908</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1391	<p>IKV6-318-T3 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 8908</p>	
1404	<p>IKV6-318-T4 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 11217</p>	
1500	<p>IKV6-318-T5 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball mountable housing Aluminium anodized (W x H x D) 400 x 144 x 40 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet DNR 11457</p>	
1506	<p>IKV6-318-T5 V2A PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball housing stainless steel (W x H x D) 400 x 144 x 40 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 ball stainless steel data sheet DNR 11457</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1501	<p>IKV6-318-T5 V2A PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball housing stainless steel (W x H x D) 400 x 144 x 40 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 ball stainless steel data sheet DNR 11457</p>	
1643	<p>IKV6-318-T6 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 12202</p>	
1735	<p>IKV6-318-T7 PS2/PS2</p> <p>R&R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 67 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 12291</p>	
1046	<p>IKV6-318S PS2/PS2</p> <p>R&R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 9840</p>	


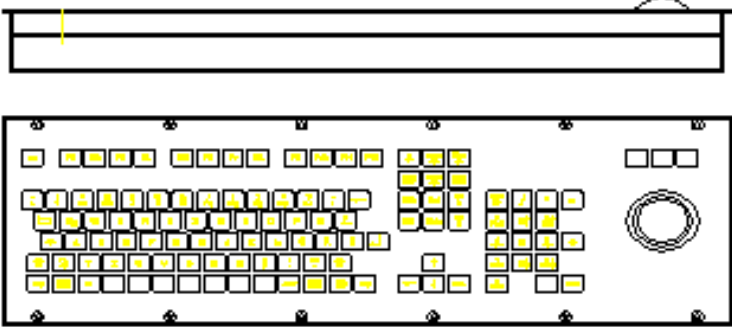


R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1222	<p>IKV6-318S2 PS2/PS2</p> <p>R&R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N (optional 1N) lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 capacitiv touchpad data sheet DNR 10346</p>	
1642	<p>IKV6-318S3 PS2/PS2</p> <p>R&R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 5 4 data sheet DNR 9840</p>	
1421	<p>IKV6-4x4-2</p> <p>R&R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	
1622	<p>IKV6-4x4-2 stainless steel</p> <p>R&R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	

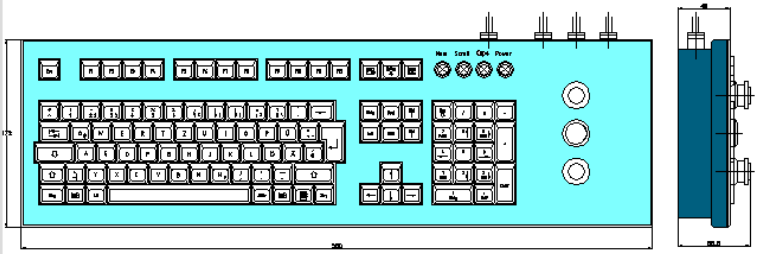


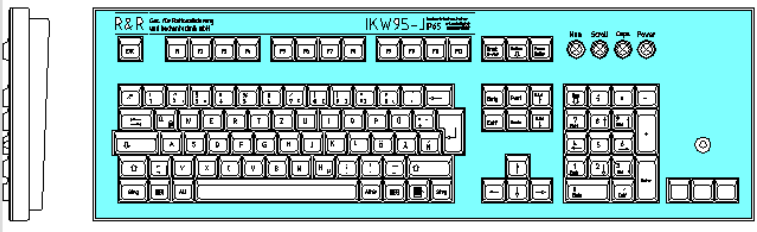
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1698	<p>IKV6-4x4-2</p> <p>R&R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	
1306	<p>IKV6W95ET PS2/PS2 V2A</p> <p>R&R Industrial mountable keyboard trackball Ball diameter 38 mm Seal material PTFE front plate stainless steel (W x H x D) 572 x 188,3 x 65 mm 108 patented R&R-keys metall key cap V5 lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP65 all around datasheet DNR 10626</p>	
1841	<p>IKV6W95L-ET PS2/PS2</p> <p>R&R Industrial keyboard with integrated 30 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 trackball protection class IP 54 data sheet DNR 13590</p>	
703	<p>IKW95 AT</p> <p>R&R Industrial desktop keyboard front plate Al anodized (W x H x D) 536 x 172 x 34 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7905</p>	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
871	<p>IKW95-2 PS2</p> <p>R&R Industrial keyboard with 3 integrated push buttons</p> <p>front plate Al anodized (W x H x D) 580 x 200 x 67 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog cable 3 m with PS2 male plug protection class IP65 1 x emergency off button, 1 x stroke button, 1 x pushbutton 3 x 3 m cable with 5 wires data sheet DNR 8966</p>	
1594	<p>IKW95-3 DE PS/2</p> <p>R&R industrial keyboard AL sand cast lacquered front panel Aluminium anodized (W x H x D) 505 x 250 x 35(52) mm WIN95-layout 105 keys lift 3 mm, actuation force 1 N PS/2 compatible watchdog weight appr. 5.7 kg protection class IP 6 5 all around data sheet DNR 3033</p>	
1455	<p>IKW95-3 UK PS/2</p> <p>R&R industrial keyboard AL sand cast lacquered front panel Aluminium anodized (W x H x D) 505 x 250 x 35(52) mm WIN95-layout 105 keys lift 3 mm, actuation force 1 N PS/2 compatible watchdog weight appr. 5.7 kg protection class IP 6 5 all around data sheet DNR 3033</p>	
692	<p>IKW95-J AT/RS232C</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al anodized (W x H x D) 536 x 172 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7876</p>	

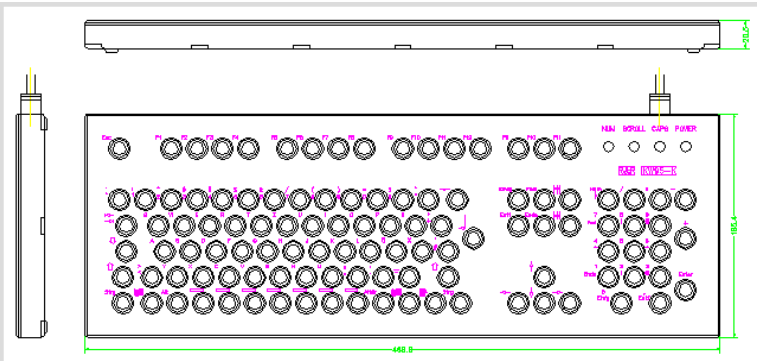
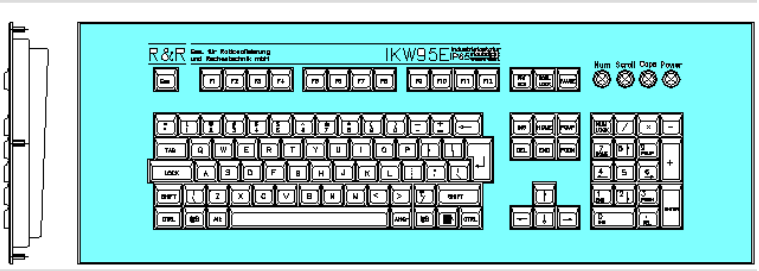
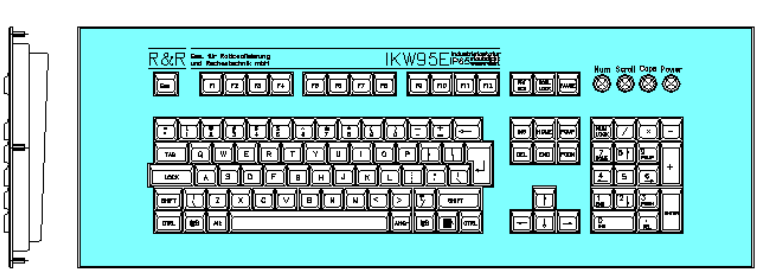

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
693	<p>IKW95-J PS2/PS2</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 536 x 172 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7876</p>	
655	<p>IKW95-K AT german</p> <p>R&R industrial keyboard desktop case front panel aluminium electrolytic oxidated sealing frame PE black inscription engraved (BxHxT) 470 x 166 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation forcet 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7639</p>	
656	<p>IKW95-K AT italien</p> <p>R&R industrial keyboard desktop case front panel aluminium electrolytic oxidated sealing frame PE black inscription engraved (BxHxT) 470 x 166 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation forcet 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7639</p>	
657	<p>IKW95-K AT US-Layout</p> <p>R&R industrial keyboard desktop case front panel aluminium anodized sealing frame PE black inscription engraved (BxHxT) 470 x 166 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation forcet 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7639</p>	





R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
658	<p>IKW95-K PS2 german</p> <p>R&R industrial keyboard desktop case front panel aluminium anodized sealing frame PE black inscription engraved (BxHxD) 470 x 166 x 24 mm R&R short lift keys DNR 5736 lift 1.5 mm actuation force 4.5 N life time > 2 Millionen strokes protection class IP 65 (dust and water proofed) all around 3 m cable data sheet DNR 7639</p>	 <p>Technical drawing of the IKW95-K PS2 German keyboard. It includes a top view showing the keyboard layout with dimensions: 470 mm width, 166 mm height, and 24 mm depth. A side view shows the keyboard's profile. The keyboard has a standard QWERTZ layout with a numeric keypad on the right. The front panel is aluminum anodized, and the sealing frame is black PE. The keyboard is IP 65 rated.</p>
872	<p>IKW95E PS2</p> <p>R&R Industrial mountable keyboard front plate Al anodized (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8977</p>	 <p>Technical drawing of the IKW95E PS2 keyboard. It includes a top view showing the keyboard layout with dimensions: 560 mm width, 200 mm height, and 30 mm depth. A side view shows the keyboard's profile. The keyboard has a standard QWERTZ layout with a numeric keypad on the right. The front plate is aluminum anodized. The keyboard is IP 65 rated.</p>
1159	<p>IKW95E-1 PS2</p> <p>R&R Industrial mountable keyboard front plate Al anodized (W x H x D) 500 x 200 x 34 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8977</p>	 <p>Technical drawing of the IKW95E-1 PS2 keyboard. It includes a top view showing the keyboard layout with dimensions: 500 mm width, 200 mm height, and 34 mm depth. A side view shows the keyboard's profile. The keyboard has a standard QWERTZ layout with a numeric keypad on the right. The front plate is aluminum anodized. The keyboard is IP 65 rated.</p>
1854	<p>IKW95EJ AT/RS232C</p> <p>R&R Industrial Mountable keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 560 x 200 x 30 mm 105 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 13653</p>	 <p>Photograph of the IKW95EJ AT/RS232C keyboard. The keyboard is white and features a joystick on the right side. It is resting on a surface of green grass. The keyboard has a standard QWERTZ layout with a numeric keypad on the right. The front plate is aluminum elox. The keyboard is IP 65 rated.</p>



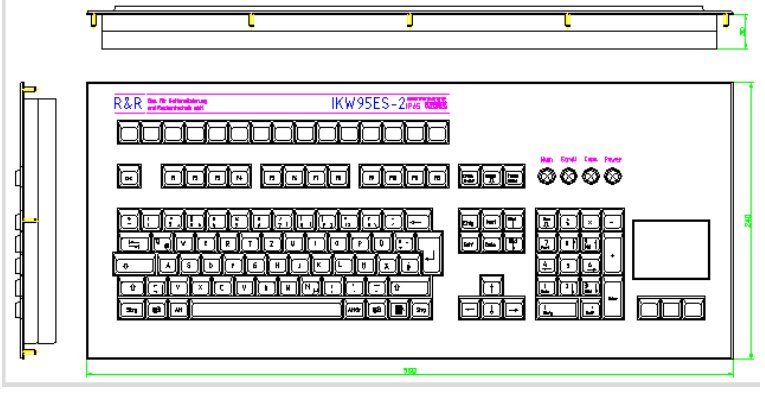

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1292	<p>IKW95ES PS2/PS2 german</p> <p>R&R Industrial mountable keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7880</p>	
698	<p>IKW95ES AT/RS232C polished</p> <p>R&R Industrial desktop keyboard touchpad front plate Al polished and anodised (W x H x D) 560 x 200 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 5 4 all around data sheet DNR 7880</p>	
696	<p>IKW95ES AT/RS232C</p> <p>R&R Industrial mountable keyboard touchpad front plate Al anodised (W x H x D) 560 x 200 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 5 4 all around data sheet DNR 7880</p>	
697	<p>IKW95ES PS2/PS2 german</p> <p>R&R Industrial mountable keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7880</p>	

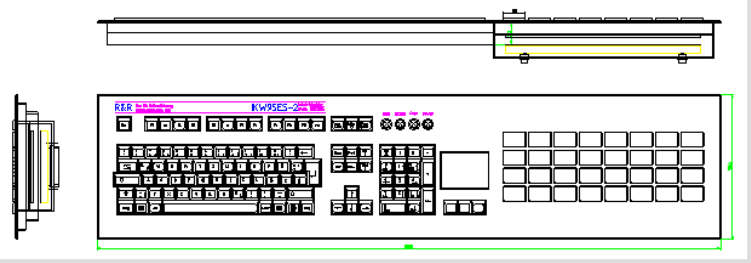
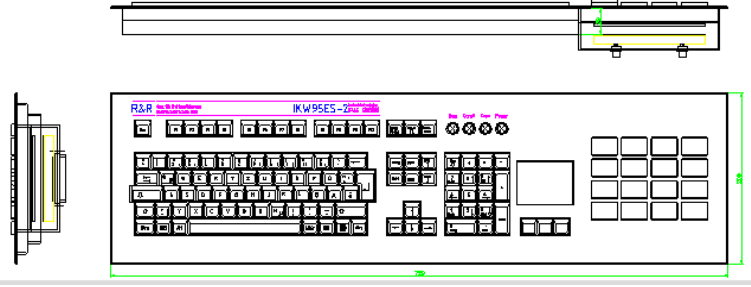


R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
699	<p>IKW95ES PS2/PS2 polished</p> <p>R&R Industrial mountable keyboard touch pad front plate Al polished and anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7880</p>	
986	<p>IKW95ES PS2/PS2</p> <p>R&R Industrial mountable keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog 1 x RS232C mouse cable 1 x PS/2 mouse cable 1 x PS/2 keyboard cable protection class IP 6 5 all around data sheet DNR 7880</p>	
1003	<p>IKW95ES-2 PS2/PS2</p> <p>R&R Industrial mountable keyboard touch pad front plate Al anodised (W x H x D) 560 x 240 x 34 mm 123 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 9663</p>	
1053	<p>IKW95ES-3 PS2/PS2</p> <p>R&R Industrial mountable keyboard touch pad housing aluminium (W x H x D) 530 x 216 x 34 mm 123 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 9954</p>	

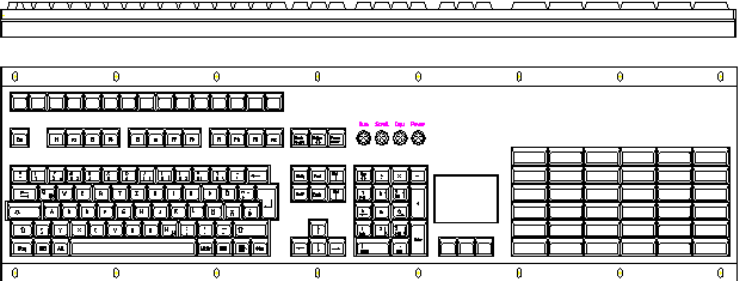

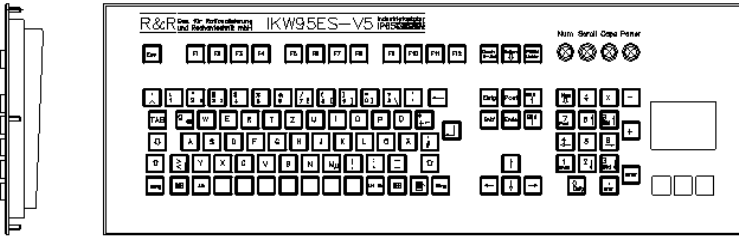
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1128	<p>IKW95ES PS2/PS2</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7880</p>	
1129	<p>IKW95ES-5 PS2/PS2 + 16 key with profibus interface</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around</p>	
1334	<p>IKW95ES-6 mounting frame data sheet DNR 10697</p>	
1333	<p>IKW95ES-6 PS2/PS2</p> <p>R&R Industrial mountable keyboard touch pad housing Aluminium (W x H x D) 568 x 200 x 34 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 10697</p>	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1290	<p>IKW95ES-7 PS2/PS2 RS232C</p> <p>R&R Industrial mountable keyboard touch pad housing aluminium (W x H x D) 570 x 226 x 34 mm 123 patented R&R-keys 36 keys with RS232C interface Zlift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 10570</p>	
1305	<p>IKW95ES-8 PS2/PS2 türkisch</p> <p>R&R Industrial mountable keyboard touch pad housing aluminium (W x H x D) 530 x 216 x 34 mm 123 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 10662</p>	
841	<p>IKW95ES-V5 PS2/PS2</p> <p>R&R Industrial desktop keyboard touch pad front plate Al anodised (W x H x D) 560 x 200 x 34 mm 108 patented R&R-keys metal key tops V5 lift 3 mm, actuation force 1 N watchdog cable 3 m protection class IP 6 5 all around data sheet DNR 8788</p>	
1341	<p>IKW95ET Anschlußkabel 3m 24VDC halogenfrei</p>	

R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1342	IKW95ET Anschlußkabel Maus/Tastatur 3m halogenfrei DNR 10601	
1301	IKW95ET PS2/PS2 + Video 3xPC R&R Industrial mounting keyboard with integrated 60mm tracking ball front plate Al anodized (W x H x D) 600 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m IP65 dust and water proofed data sheet DNR 10601	
1374	IKW95ET-1 PS2/PS2 1xPC R&R Industrial mounting keyboard with integrated 60mm tracking ball front plate Al anodized (W x H x D) 600 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, 3 m cable IP65 dust and water proofed data sheet DNR 10601	
1399	IKW95ET-2 PS2/PS2 1xPC R&R Industrial mounting keyboard with integrated 60mm tracking ball front plate Al anodized (W x H x D) 600 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, 3 m cable IP65 dust and water proofed data sheet DNR 10601	

R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1284	<p>IKW95P2 PS2</p> <p>R&R programmable Industrial desktop keyboard front plate Al anodized (W x H x D) 480 x 300 x 37 mm 105 + 68 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around programable over RS232C data sheet DNR 8032</p>	
746	<p>IKW95P2 PS2</p> <p>R&R programmable Industrial desktop keyboard front plate Al anodized (W x H x D) 480 x 300 x 37 mm 105 + 68 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around programable over RS232C data sheet DNR 8032</p>	
622	<p>IKW95S IP65 AT</p> <p>R&R Industrial keyboard front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7495</p>	
623	<p>IKW95S IP65 PS2</p> <p>R&R Industrial keyboard front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7495</p>	

R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
544	<p>IKW95SJ F IP65 AT / RS232C F desktop keyboard French layout</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6497</p>	
419	<p>KW95SJ IP65 AT / RS232C german</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6497</p>	
753	<p>KW95SJ IP65 AT / RS232C USASCII</p> <p>R&R Industrial desktop keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6497</p>	
621	<p>KW95SJ IP65 PS2 / PS2</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6497</p>	

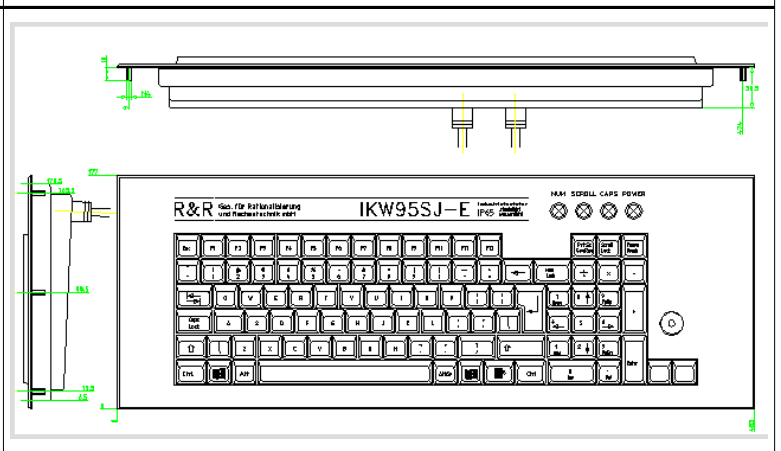
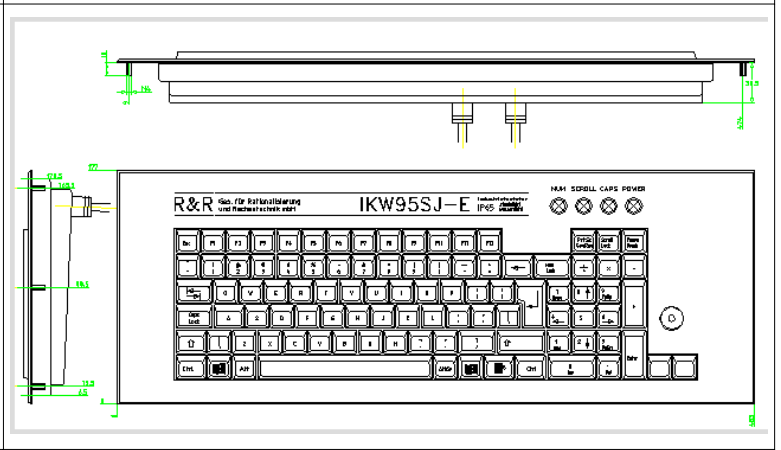
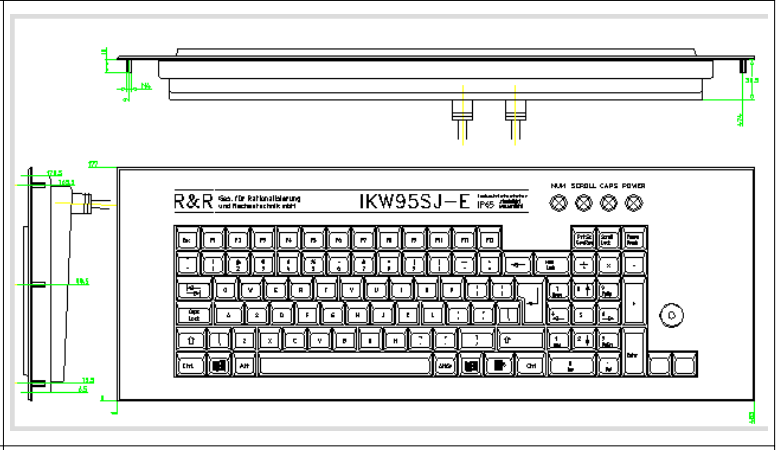
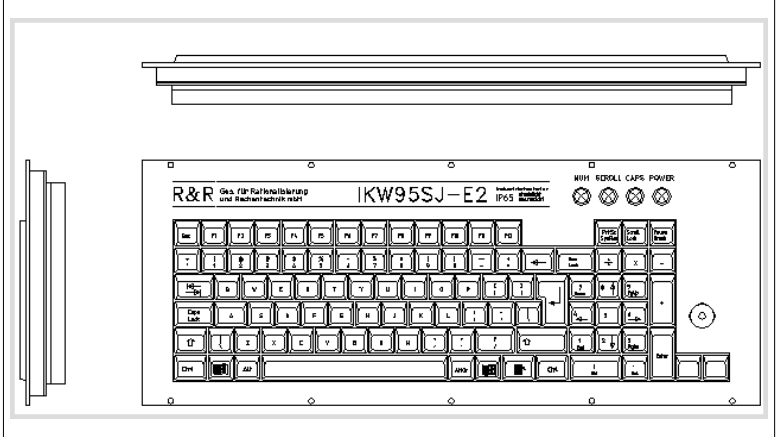
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
752	<p>KW95SJ IP65 PS2 / PS2 USASCII</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6497</p>	
421	<p>IKW95SJ-1HE IP65 AT / RS232C</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing drawer keyboard front plate Al elox (W x H x D) 483 x 44 x 310 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6525</p>	
782	<p>IKW95SJ-1HE IP65 PS2 / PS2</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing drawer keyboard front plate Al elox (W x H x D) 483 x 177 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6525</p>	
420	<p>IKW95SJ-4HE IP65 AT / RS232C</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 483 x 177 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 6498</p>	

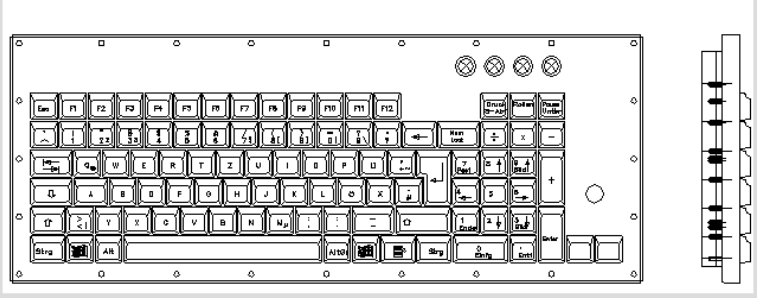
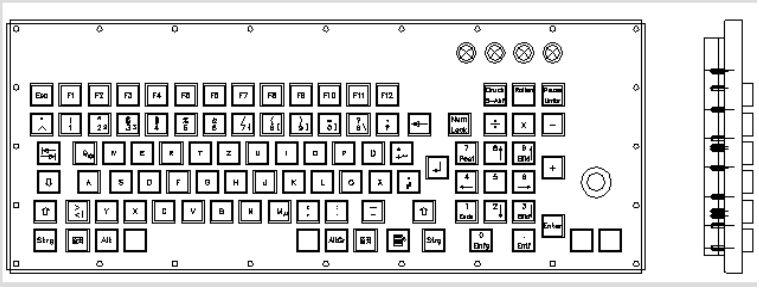
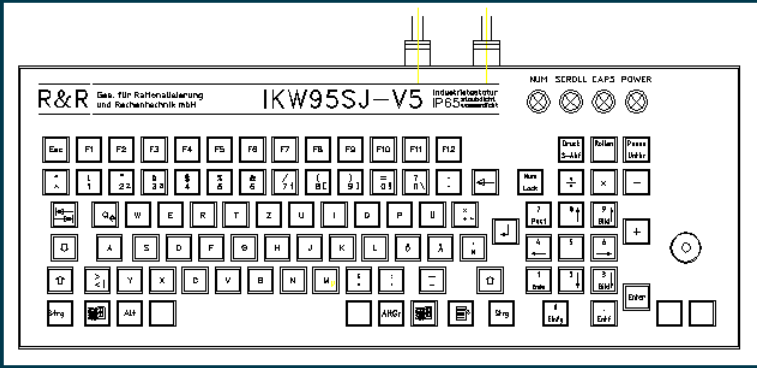
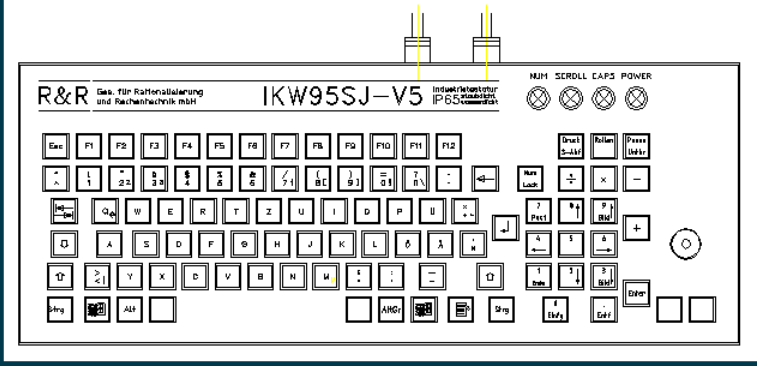
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
648	<p>IKW95SJ-E IP65 AT / RS232C German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 483 x 177 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7617</p>	
650	<p>IKW95SJ-E IP65 AT / RS232C italien</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 483 x 177 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7617</p>	
649	<p>IKW95SJ-E IP65 AT / RS232C USASCII</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 483 x 177 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7617</p>	
777	<p>IKW95SJ-E2 IP65 AT / RS232C German</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 440 x 175 x 30 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8258</p>	

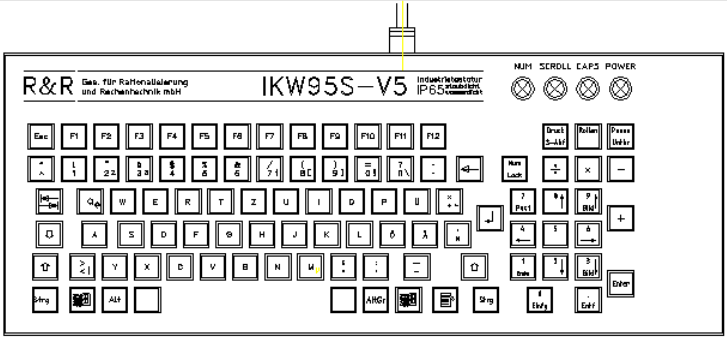


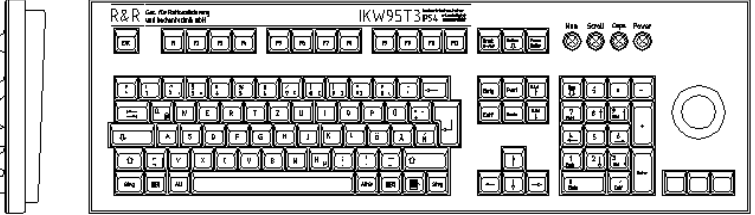
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
852	<p>IKW95SJ-L PS2/PS2 IP65 deutsch</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing (W x H x D) 422 x 166 x 33 mm 97 patented R&R-keys silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet DNR 8820</p>	
853	<p>IKW95SJ-LV5 PS2/PS2 IP65 deutsch</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing (W x H x D) 422 x 166 x 33 mm 97 patented R&R-keys vandal proof metall key tops V5 silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 data sheet DNR 8821</p>	
624	<p>KW95SJ-V5 IP65 AT / RS232C</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys with vandal proof metall key caps V5 silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7543</p>	
628	<p>KW95SJ-V5 IP65 PS2 / PS2</p> <p>R&R Industrial keyboard joystick with patented capacitive sensing front plate Al elox (W x H x D) 420 x 164 x 30 mm 97 patented R&R-keys with vandal proof metall key caps V5 silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7543</p>	

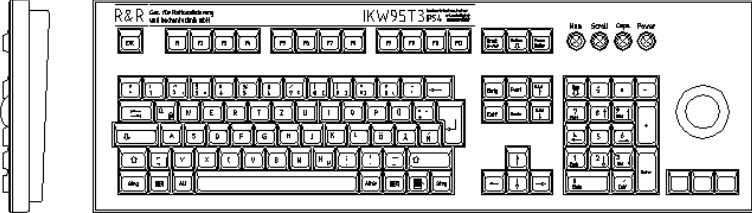
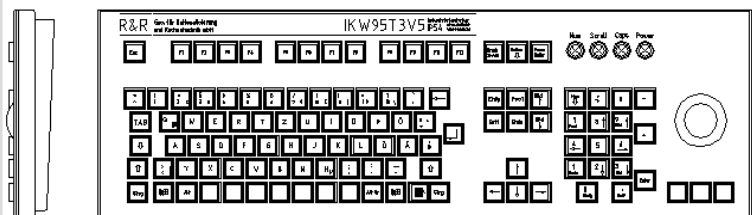
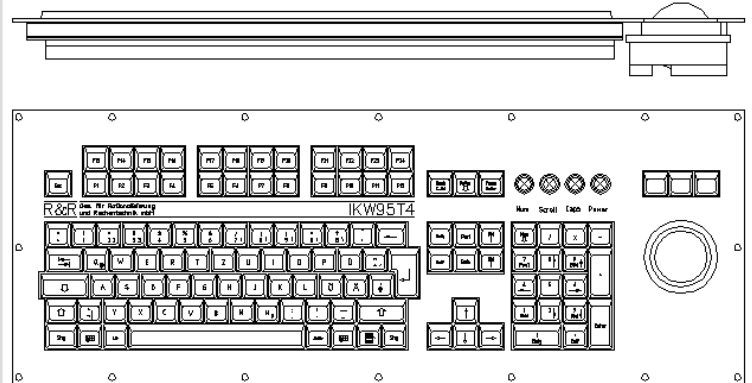
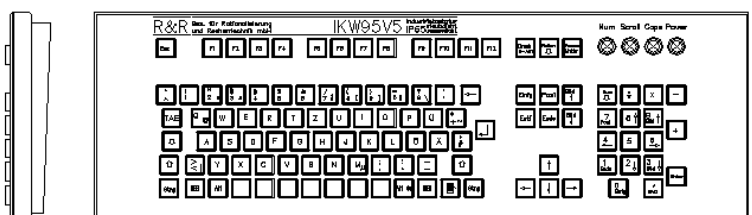
R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
627	<p>IKW95S-V5 IP65 AT</p> <p>R&R Industrial keyboard front plate Al elox (W x H x D) 420 x 164 x 30 mm 95 patented R&R-keys with vandal proof metall key caps V5 silicon switching pad DNR 3374 lift 3 mm, actuation force 1 N lifetime > 3 million cycles watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 7544</p>	
670	<p>IKW95T PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated 2" tracking ball front plate Al anodized (W x H x D) 580 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackingball IP54 data sheet DNR 7706</p>	
671	<p>IKW95T2 2x PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al anodized (W x H x D) 580 x 200 x 62 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 Trackball IP54 data sheet DNR 7708</p>	
694	<p>IKW95T3 AT/RS232C</p> <p>R&R Industrial desktop keyboard trackball Ball diameter 34 mm Seal material PTFE front plate Al anodized (W x H x D) 536 x 172 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 5 4 all around data sheet DNR 7875</p>	



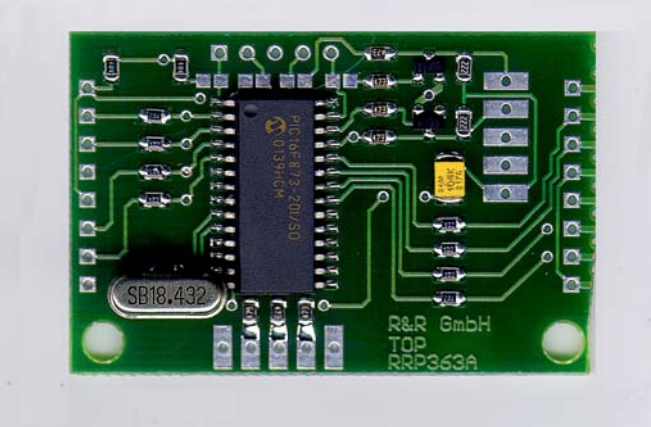
R&R industrial keyboards
 März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
695	<p>IKW95T3 PS2/PS2</p> <p>R&R Industrial desktop keyboard trackball Ball diameter 34 mm Seal material PTFE front plate Al anodized (W x H x D) 536 x 172 x 30 mm 108 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 5 4 all around data sheet DNR 7875</p>	
839	<p>IKW95T3V5 PS2/PS2</p> <p>R&R Industrial desktop keyboard trackball Ball diameter 34 mm Seal material PTFE front plate Al anodized (W x H x D) 536 x 172 x 30 mm 108 patented R&R-keys metall key cap V5 lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 5 4 all around data sheet DNR 8548</p>	
796	<p>IKW95T4 PS2/PS2</p> <p>R&R Industrial mounting keyboard with integrated tracking ball front plate Al anodized (W x H x D) 550 x 205 x 40 mm 117 patented R&R-keys lift 3 mm, actuation force 1 N watchdog, cable 3 m keyboard IP65 interface PS2 Trackball 2" IP54 dust and waterproof interface PS2 data sheet DNR 8451</p>	
840	<p>IKW95V5 PS2</p> <p>R&R Industrial desktop keyboard front plate Al elox (W x H x D) 536 x 172 x 30 mm 105 patented R&R-keys metall key cap V5 lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8785</p>	




R&R industrial keyboards
 März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1428	IR373-K RR-P-373 Infrarotempfänger Gehäuse Aluminium eloxiert Schnittstelle PS/2 3 m Kabel Datenblatt DNR 11157	
1706	IR373-M RR-P-373 Infrarotempfänger Gehäuse Aluminium eloxiert Schnittstelle PS/2 3 m Kabel Datenblatt DNR 11157	
1616	RR-P-363 Trackballcontroller Quadratur-Ausgang oder PS/2 Maus Datenblatt DNR 11157	
1592	Tastatur Cherry G81-3000 mit Schutzfolie	



R&R industrial keyboards
März 2005
 www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1634	Tastatur Slim Line deutsch schwarz Typ Cherry G84-4100PTDME USB und PS/2-Stecker 282 x 132 x 27 mm LANR 8024	
1635	Tastatur Slim Line mit Trackball deutsch schwarz Typ Cherry G84-4400PRBDE PS/2 370 x 139 x 20 mm LANR 8025	
1636	Tastatur Slim Line mit Trackball deutsch schwarz Typ Cherry G84-4400PTBDE USB 370 x 139 x 20 mm LANR 8026	
1608	Tastatur US PS/2-Stecker Standard LANR 7272 Typ G83-6105LPNEU	

R&R industrial keyboards
März 2005
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30
 Kreissparkasse Tuttlingen (BLZ 64350070) 392
 USt.-IdNr.: DE141907699

Art.-Nr.	Bezeichnung	Bild
1429	Tragriemen mit Karabinerhaken schwarz, Nylon, verstellbar 20mm breit, 1120 mm lang LANR 7234	
440	TT1 keyboard line driver PC-Seite usable only in connection with TT2 or TT3 data sheet DNR 6675	
441	TT2 Line driver keyboard-Seite together with TT1 for cable lengths to appr. 100 m recommended cable: flexibel, twisted pair, shielded e.g.: LiFYCY 2x2x0.20 mm ² data sheet DNR 6675	
442	TT3 Line driver keyboard-Seite with connector possible for external power supply 8 to 24 V DC together with TT1 for cable lengths up to 200 m recommended cable: flexibel, twisted pair, shielded e.g.: LiFYCY 2x2x0.20 mm ² data sheet DNR 6675	